



# **PIC32MX5XX/6XX/7XX**

## **Data Sheet**

USB, CAN and Ethernet  
32-bit Flash Microcontrollers

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, rfPIC and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Octopus, Omniclient Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICKit, PICtail, PIC<sup>32</sup> logo, REAL ICE, rLAB, Select Mode, Total Endurance, TSHARC, UniWinDriver, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2009, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949:2002 ==**

*Microchip received ISO/TS-16949:2002 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*



# PIC32MX5XX/6XX/7XX

## High-Performance USB, CAN, and Ethernet 32-bit Flash Microcontrollers

### High-Performance 32-bit RISC CPU:

- MIPS32® M4K™ 32-bit core with 5-stage pipeline
- 80 MHz maximum frequency
- 1.56 DMIPS/MHz (Dhrystone 2.1) performance at zero wait state Flash access
- Single-cycle multiply and high-performance divide unit
- MIPS16e™ mode for up to 40% smaller code size
- Two sets of 32 core register files (32-bit) to reduce interrupt latency
- Prefetch Cache module to speed execution from Flash

### Microcontroller Features:

- Operating voltage range of 2.3V to 3.6V
- 256K to 512K Flash memory (plus an additional 12 KB of Boot Flash)
- 64K to 128K SRAM memory
- Pin-compatible with most PIC24/dsPIC® devices
- Multiple power management modes
- Multiple interrupt vectors with individually programmable priority
- Fail-Safe Clock Monitor mode
- Configurable Watchdog Timer with on-chip Low-Power RC oscillator for reliable operation

### Peripheral Features:

- Atomic Set, Clear, and Invert operation on select peripheral registers
- 8-channel hardware DMA with automatic data size detection
- USB 2.0-compliant full-speed device and On-The-Go (OTG) controller:
  - Dedicated DMA channels
- 10/100 Mbps Ethernet MAC with MII and RMII interface:
  - Dedicated DMA channels
- CAN module:
  - 2.0B Active with DeviceNet™ addressing support
  - Dedicated DMA channels
- 3 MHz to 25 MHz crystal oscillator

### Peripheral Features (Continued):

- Internal 8 MHz and 32 kHz oscillators
- Six UART modules with:
  - RS-232, RS-485 and LIN 1.2 support
  - IrDA® with on-chip hardware encoder and decoder
- Up to four SPI modules
- Up to five I²C™ modules
- Separate PLLs for CPU and USB clocks
- Parallel master and slave port (PMP/PSP) with 8-bit and 16-bit data and up to 16 address lines
- Hardware Real-Time Clock/Calendar (RTCC)
- Five 16-bit Timers/Counters (two 16-bit pairs combine to create two 32-bit timers)
- Five Capture inputs
- Five Compare/PWM outputs
- Five external interrupt pins
- High-speed I/O pins capable of toggling at up to 80 MHz
- High-current sink/source (18 mA/18 mA) on all I/O pins
- Configurable open-drain output on digital I/O pins

### Debug Features:

- Two programming and debugging Interfaces:
  - 2-wire interface with unintrusive access and real-time data exchange with application
  - 4-wire MIPS® standard enhanced JTAG interface
- Unintrusive hardware-based instruction trace
- IEEE Standard 1149.2-compatible (JTAG) boundary scan

### Analog Features:

- Up to 16-channel 10-bit Analog-to-Digital Converter:
  - 1 Msps conversion rate
  - Conversion available during Sleep and Idle
- Two Analog Comparators
- 5V tolerant input pins (digital pins only)

# PIC32MX5XX/6XX/7XX

**TABLE 1: PIC32MX FEATURES**

| Device          | Pins | Program Memory (KB)     | Data Memory (KB) | USB | Ethernet | CAN | Timers/Capture/Compare | DMA Channels<br>(Programmable/<br>Dedicated) | UART <sup>(2,3)</sup> | SPI <sup>(3)</sup> | I <sup>2</sup> C <sup>TM(3)</sup> | 10-bit 1 Msps ADC<br>(Channels) | Comparators | PMP/PSP | JTAG | Trace | Packages <sup>(4)</sup> |
|-----------------|------|-------------------------|------------------|-----|----------|-----|------------------------|----------------------------------------------|-----------------------|--------------------|-----------------------------------|---------------------------------|-------------|---------|------|-------|-------------------------|
| PIC32MX575F256H | 64   | 256 + 12 <sup>(1)</sup> | 64               | 1   | 0        | 1   | 5/5/5                  | 8/4                                          | 6                     | 3                  | 4                                 | 16                              | 2           | Yes     | Yes  | No    | PT,<br>MR               |
| PIC32MX575F512H | 64   | 512 + 12 <sup>(1)</sup> | 64               | 1   | 0        | 1   | 5/5/5                  | 8/4                                          | 6                     | 3                  | 4                                 | 16                              | 2           | Yes     | Yes  | No    | PT,<br>MR               |
| PIC32MX675F512H | 64   | 512 + 12 <sup>(1)</sup> | 64               | 1   | 1        | 0   | 5/5/5                  | 8/4                                          | 6                     | 3                  | 4                                 | 16                              | 2           | Yes     | Yes  | No    | PT,<br>MR               |
| PIC32MX695F512H | 64   | 512 + 12 <sup>(1)</sup> | 128              | 1   | 1        | 0   | 5/5/5                  | 8/4                                          | 6                     | 3                  | 4                                 | 16                              | 2           | Yes     | Yes  | No    | PT,<br>MR               |
| PIC32MX795F512H | 64   | 512 + 12 <sup>(1)</sup> | 128              | 1   | 1        | 2   | 5/5/5                  | 8/8                                          | 6                     | 3                  | 4                                 | 16                              | 2           | Yes     | Yes  | No    | PT,<br>MR               |
| PIC32MX575F256L | 100  | 256 + 12 <sup>(1)</sup> | 64               | 1   | 0        | 1   | 5/5/5                  | 8/4                                          | 6                     | 4                  | 5                                 | 16                              | 2           | Yes     | Yes  | Yes   | PT,<br>PF,<br>BG        |
| PIC32MX575F512L | 100  | 512 + 12 <sup>(1)</sup> | 64               | 1   | 0        | 1   | 5/5/5                  | 8/4                                          | 6                     | 4                  | 5                                 | 16                              | 2           | Yes     | Yes  | Yes   | PT,<br>PF,<br>BG        |
| PIC32MX675F512L | 100  | 512 + 12 <sup>(1)</sup> | 64               | 1   | 1        | 0   | 5/5/5                  | 8/4                                          | 6                     | 4                  | 5                                 | 16                              | 2           | Yes     | Yes  | Yes   | PT,<br>PF,<br>BG        |
| PIC32MX695F512L | 100  | 512 + 12 <sup>(1)</sup> | 128              | 1   | 1        | 0   | 5/5/5                  | 8/4                                          | 6                     | 4                  | 5                                 | 16                              | 2           | Yes     | Yes  | Yes   | PT,<br>PF,<br>BG        |
| PIC32MX795F512L | 100  | 512 + 12 <sup>(1)</sup> | 128              | 1   | 1        | 2   | 5/5/5                  | 8/8                                          | 6                     | 4                  | 5                                 | 16                              | 2           | Yes     | Yes  | Yes   | PT,<br>PF,<br>BG        |

**Legend:** PF, PT = TQFP MR = QFN BG = XBGA

**Note 1:** This device features 12 KB boot Flash memory.


**2:** CTS and RTS pins may not be available for all UART modules. Refer to the “Pin Diagrams” section for more information.

**3:** Some pins between the UART, SPI, and I<sup>2</sup>C modules may be shared. Refer to the “Pin Diagrams” section for more information.

**4:** Refer to **Section 32.0 “Packaging Information”** for detailed information.

## Pin Diagrams

■ = Pins are up to 5V tolerant




# PIC32MX5XX/6XX/7XX

## Pin Diagrams (Continued)

### 64-Pin QFN

■ = Pins are up to 5V tolerant

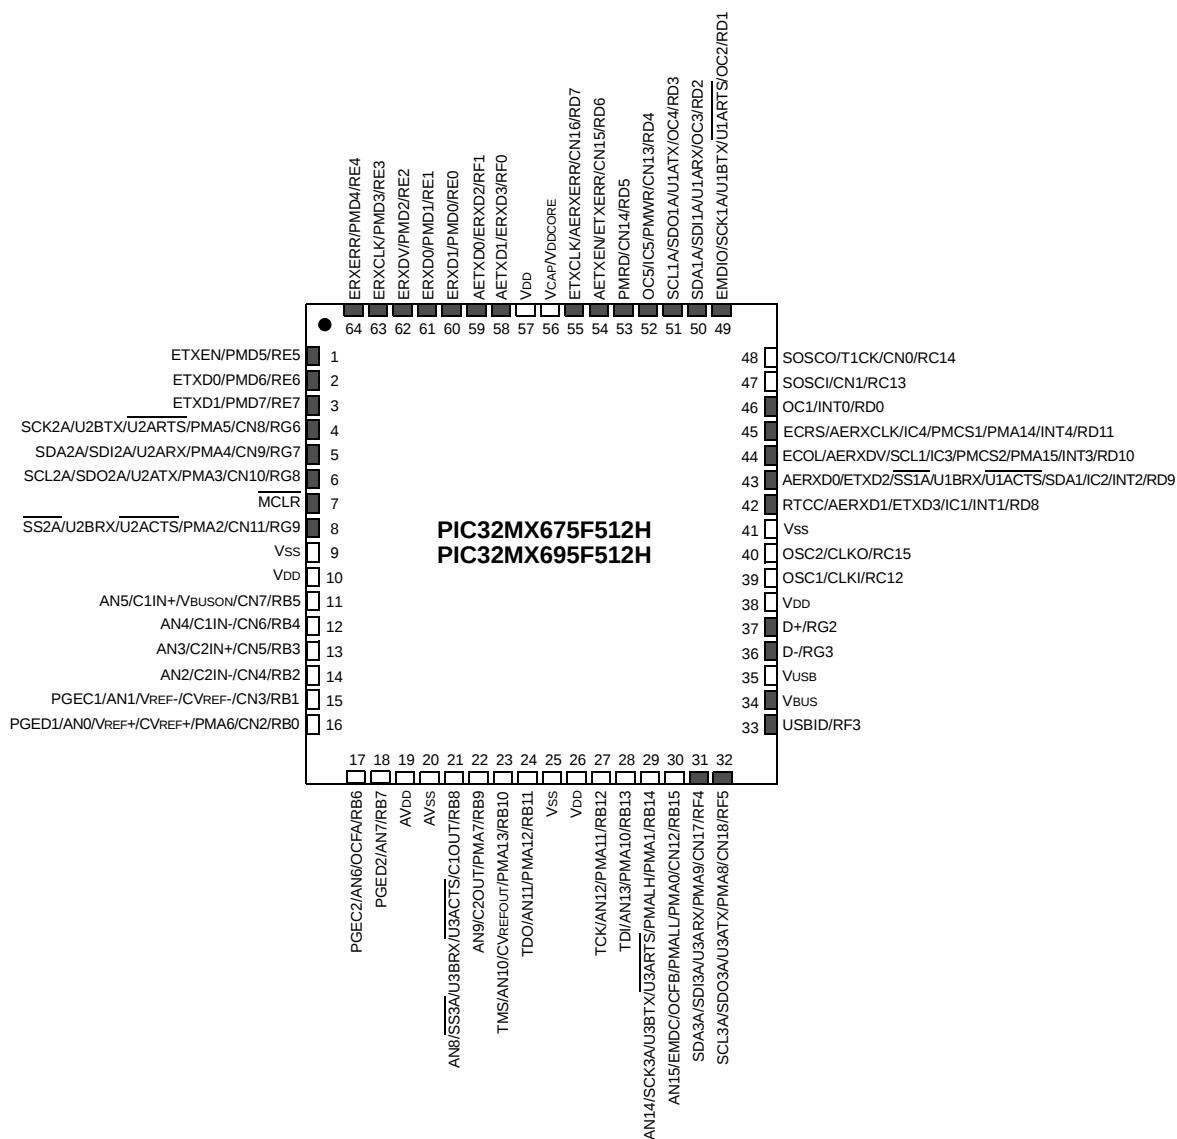


**Note:** The metal plane at the bottom of the device is not connected to any pins and is recommended to be connected to Vss externally.

# PIC32MX5XX/6XX/7XX

## Pin Diagrams (Continued)

### 64-Pin QFN

■ = Pins are up to 5V tolerant

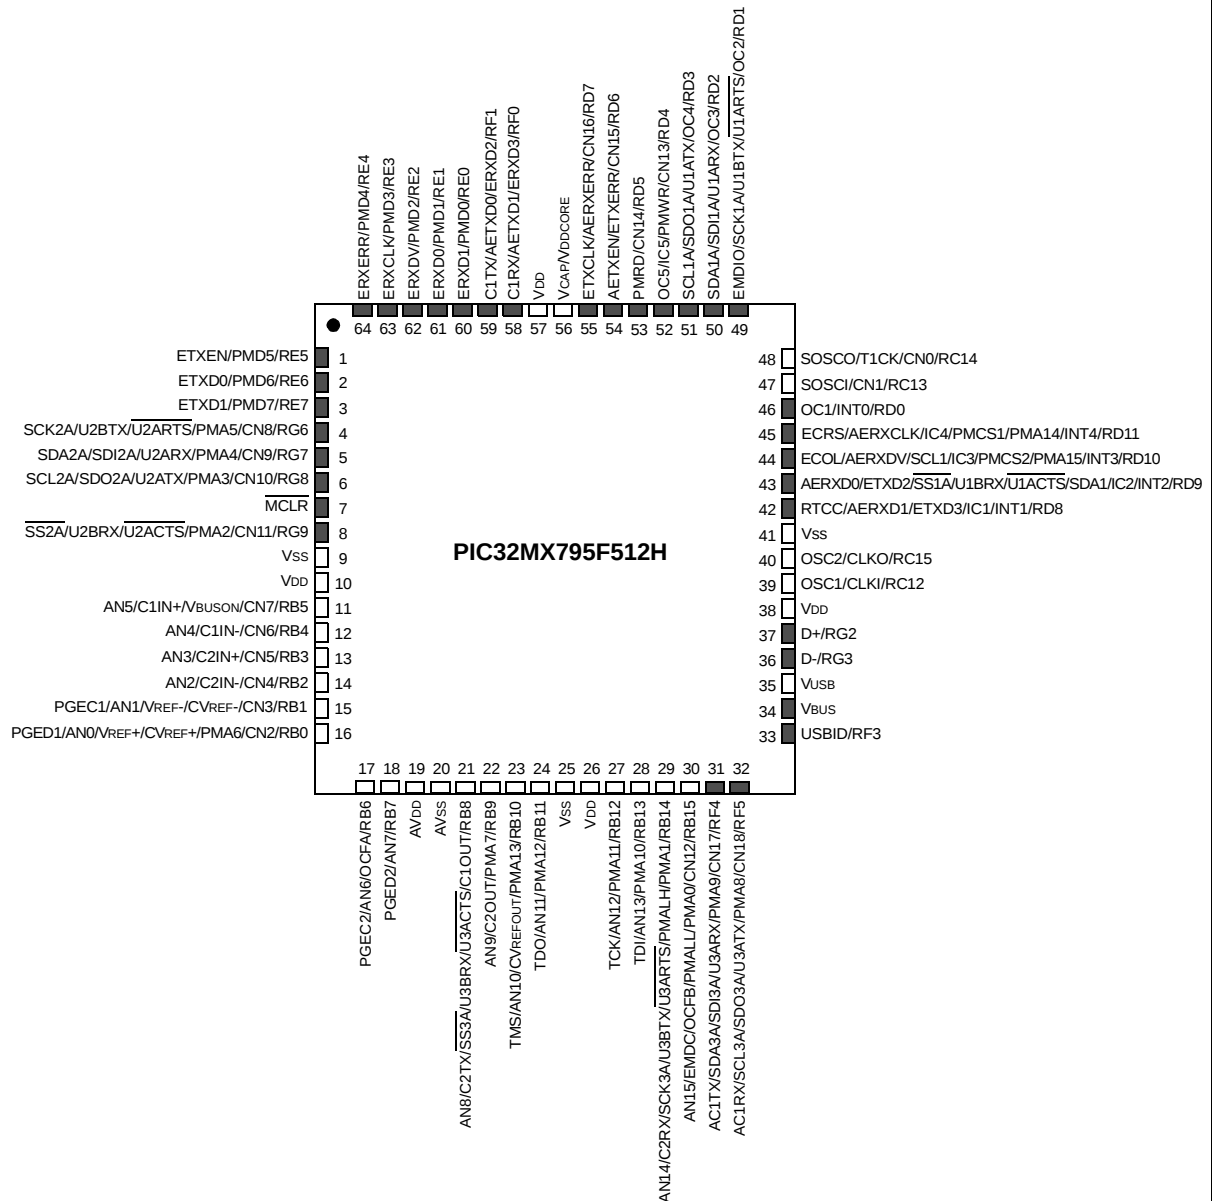


**Note:** The metal plane at the bottom of the device is not connected to any pins and is recommended to be connected to VSS externally.

# PIC32MX5XX/6XX/7XX

## Pin Diagrams (Continued)

64-Pin TQFP

■ = Pins are up to 5V tolerant

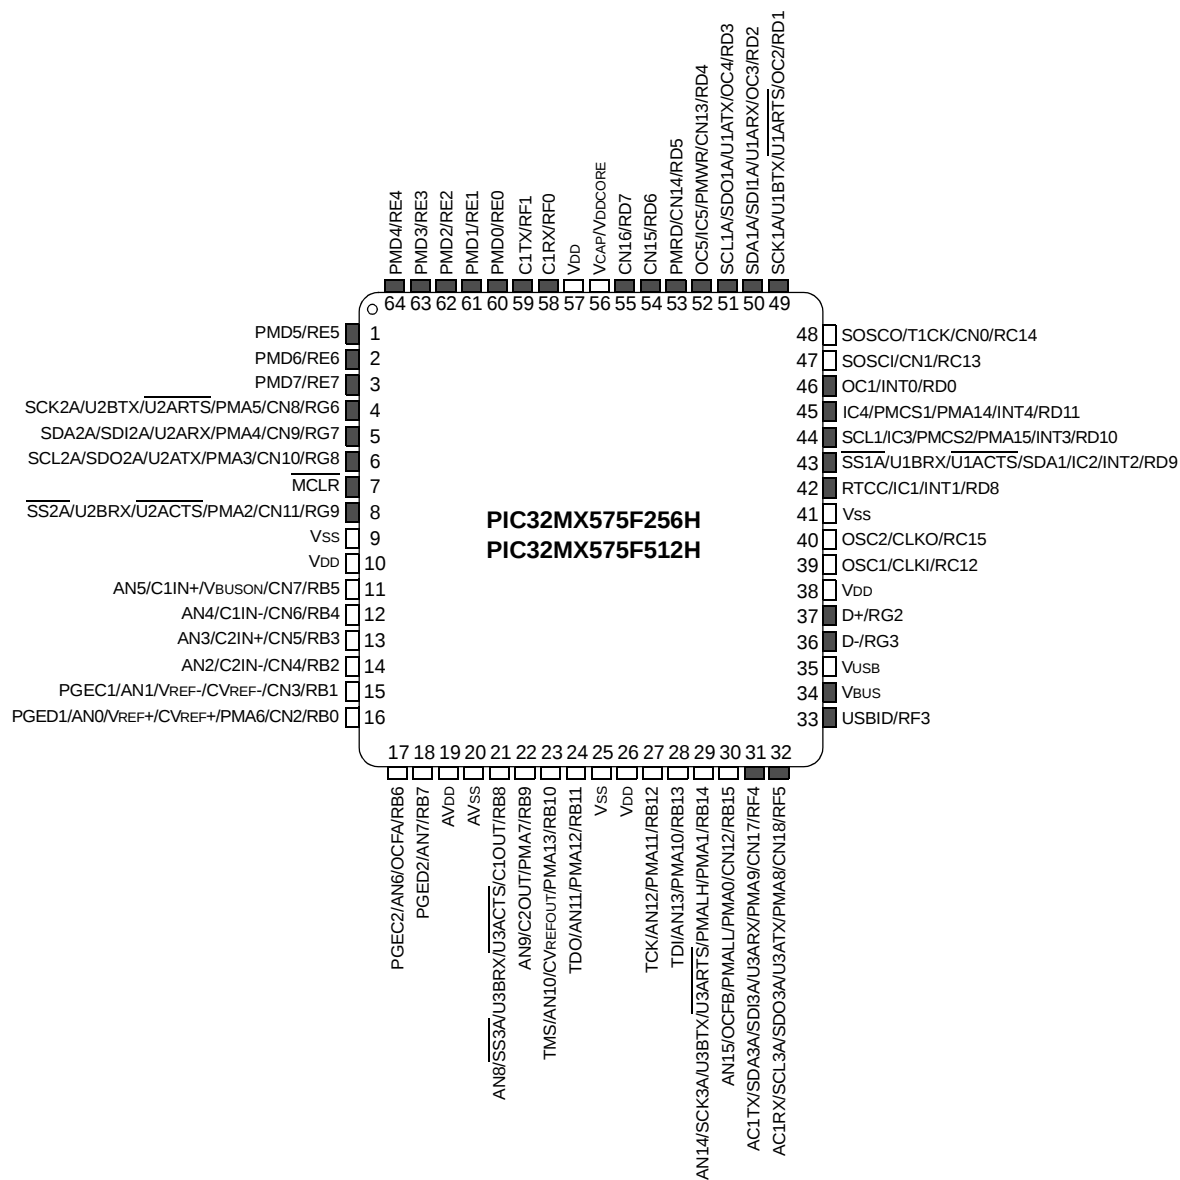


# PIC32MX5XX/6XX/7XX

## Pin Diagrams (Continued)

### 64-Pin TQFP

■ = Pins are up to 5V tolerant

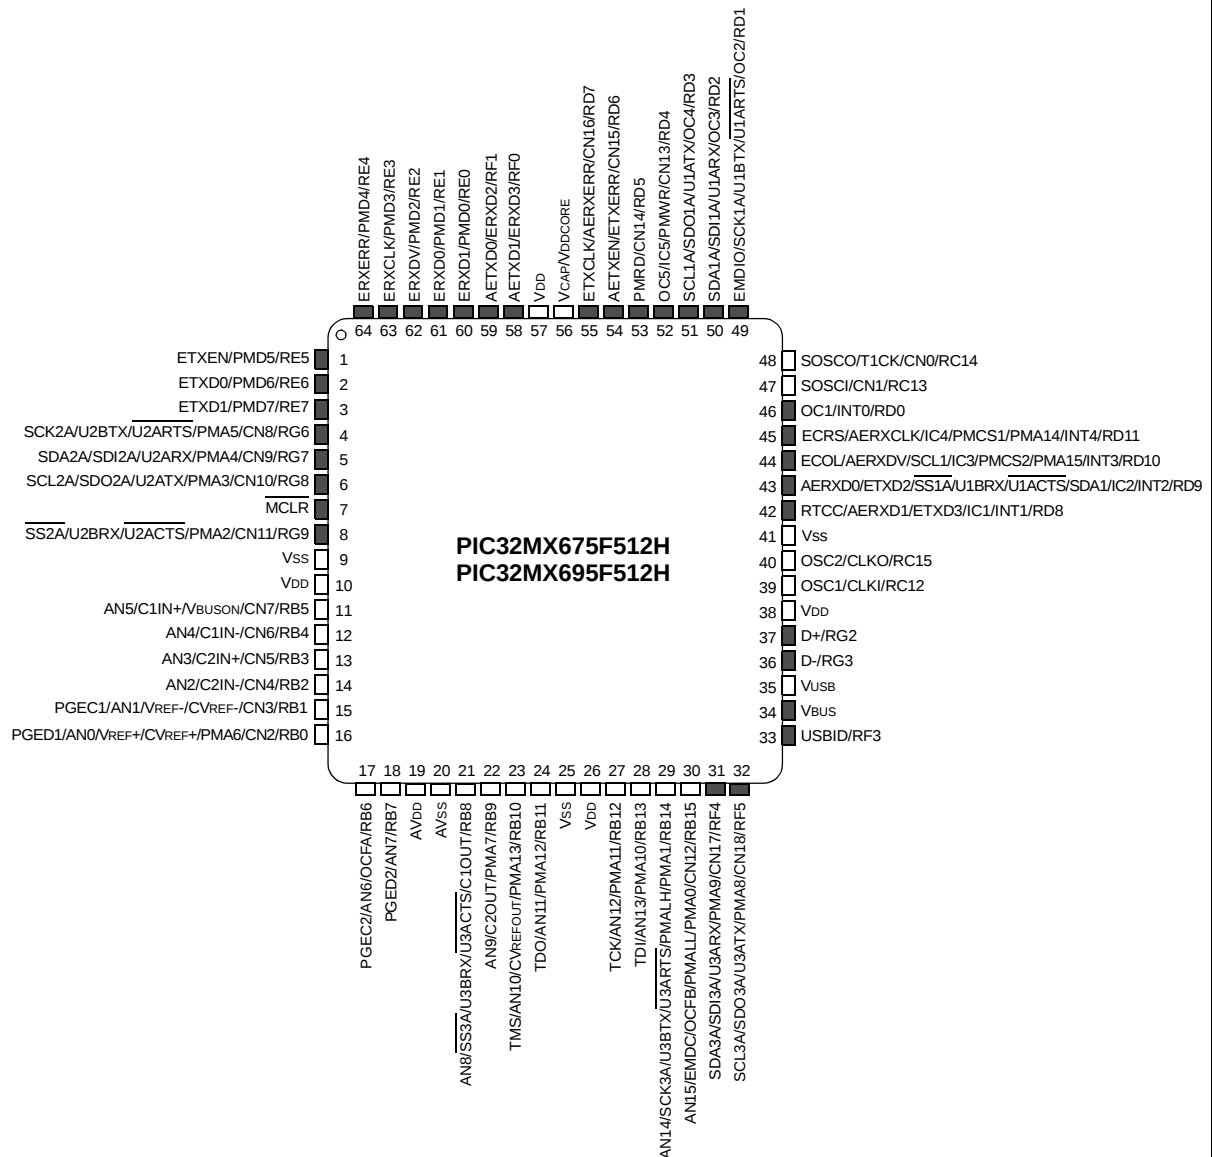


# PIC32MX5XX/6XX/7XX

## Pin Diagrams (Continued)

### 64-Pin TQFP

■ = Pins are up to 5V tolerant

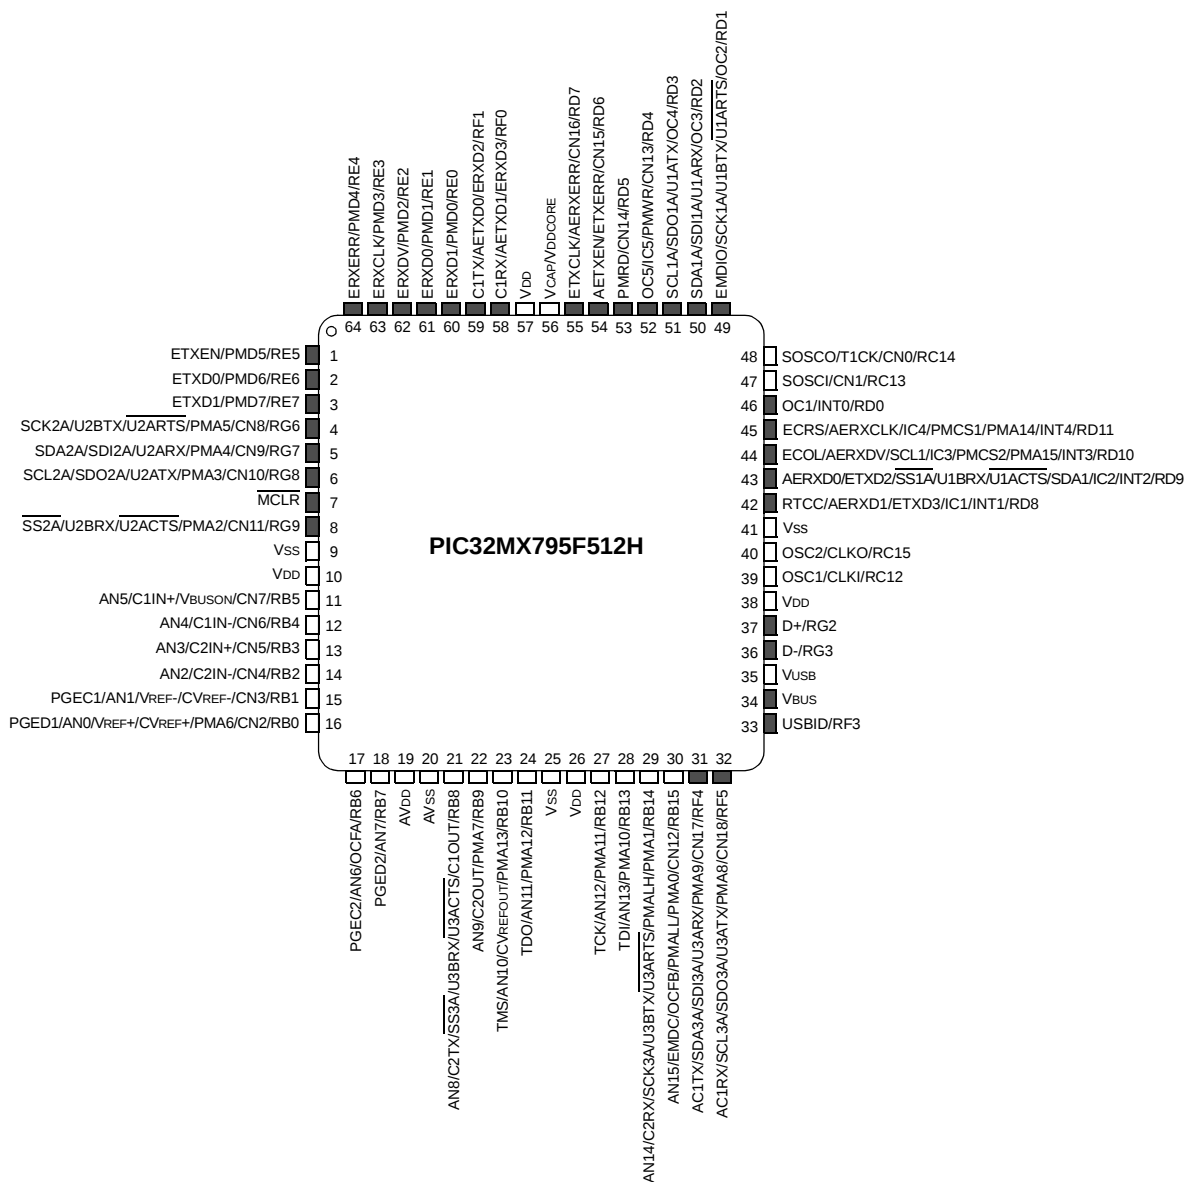




# PIC32MX5XX/6XX/7XX

## Pin Diagrams (Continued)

### 100-Pin TQFP

■ = Pins are up to 5V tolerant

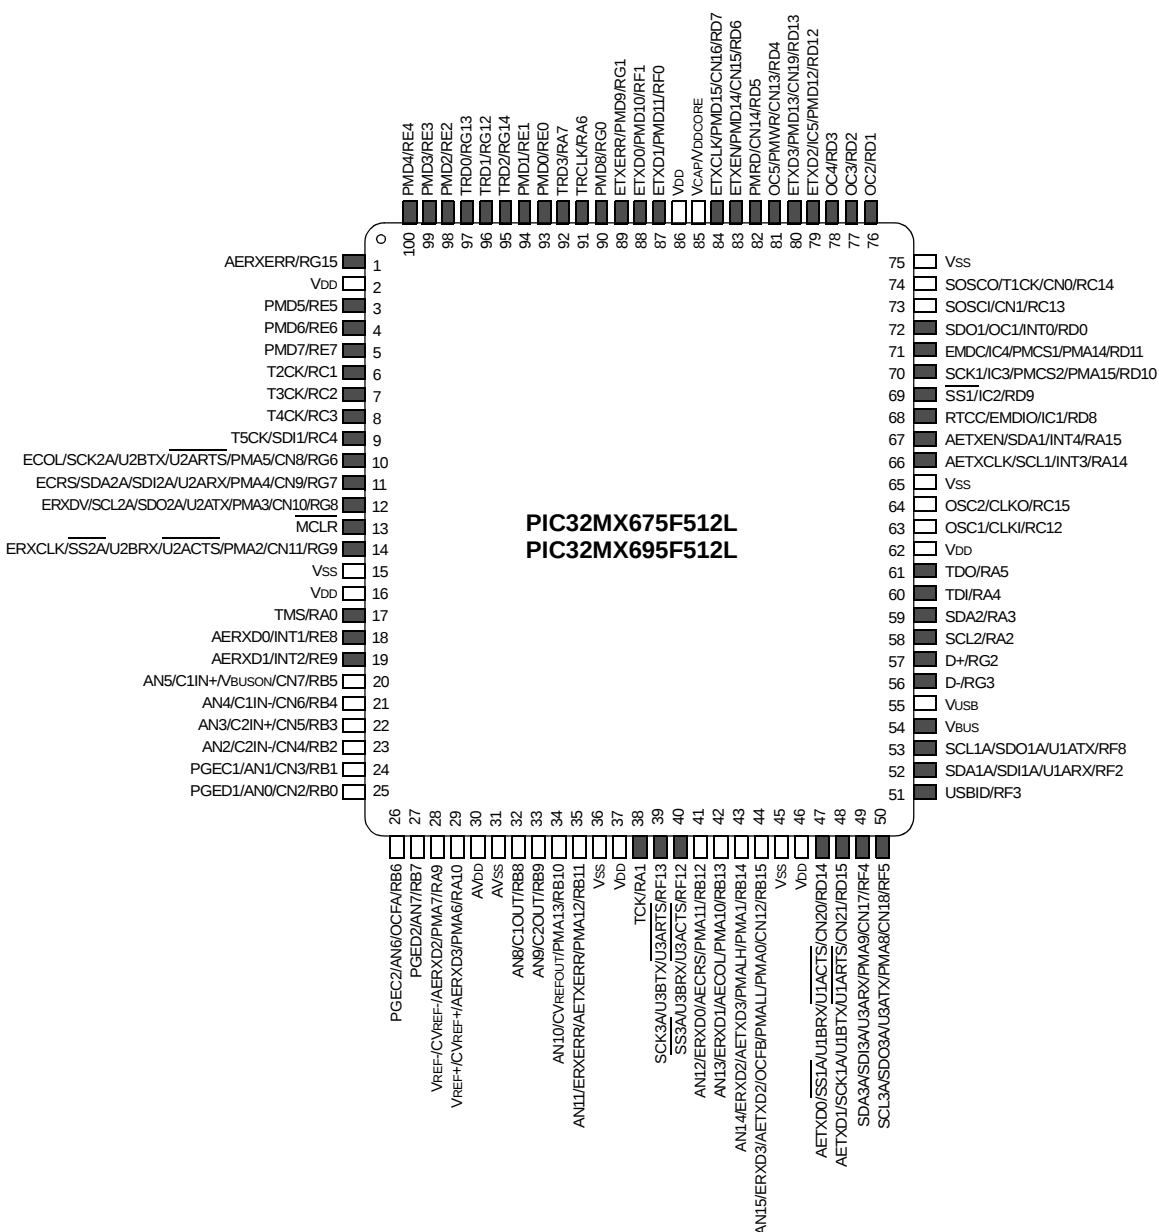


# PIC32MX5XX/6XX/7XX

## Pin Diagrams (Continued)

### 100-Pin TQFP

■ = Pins are up to 5V tolerant

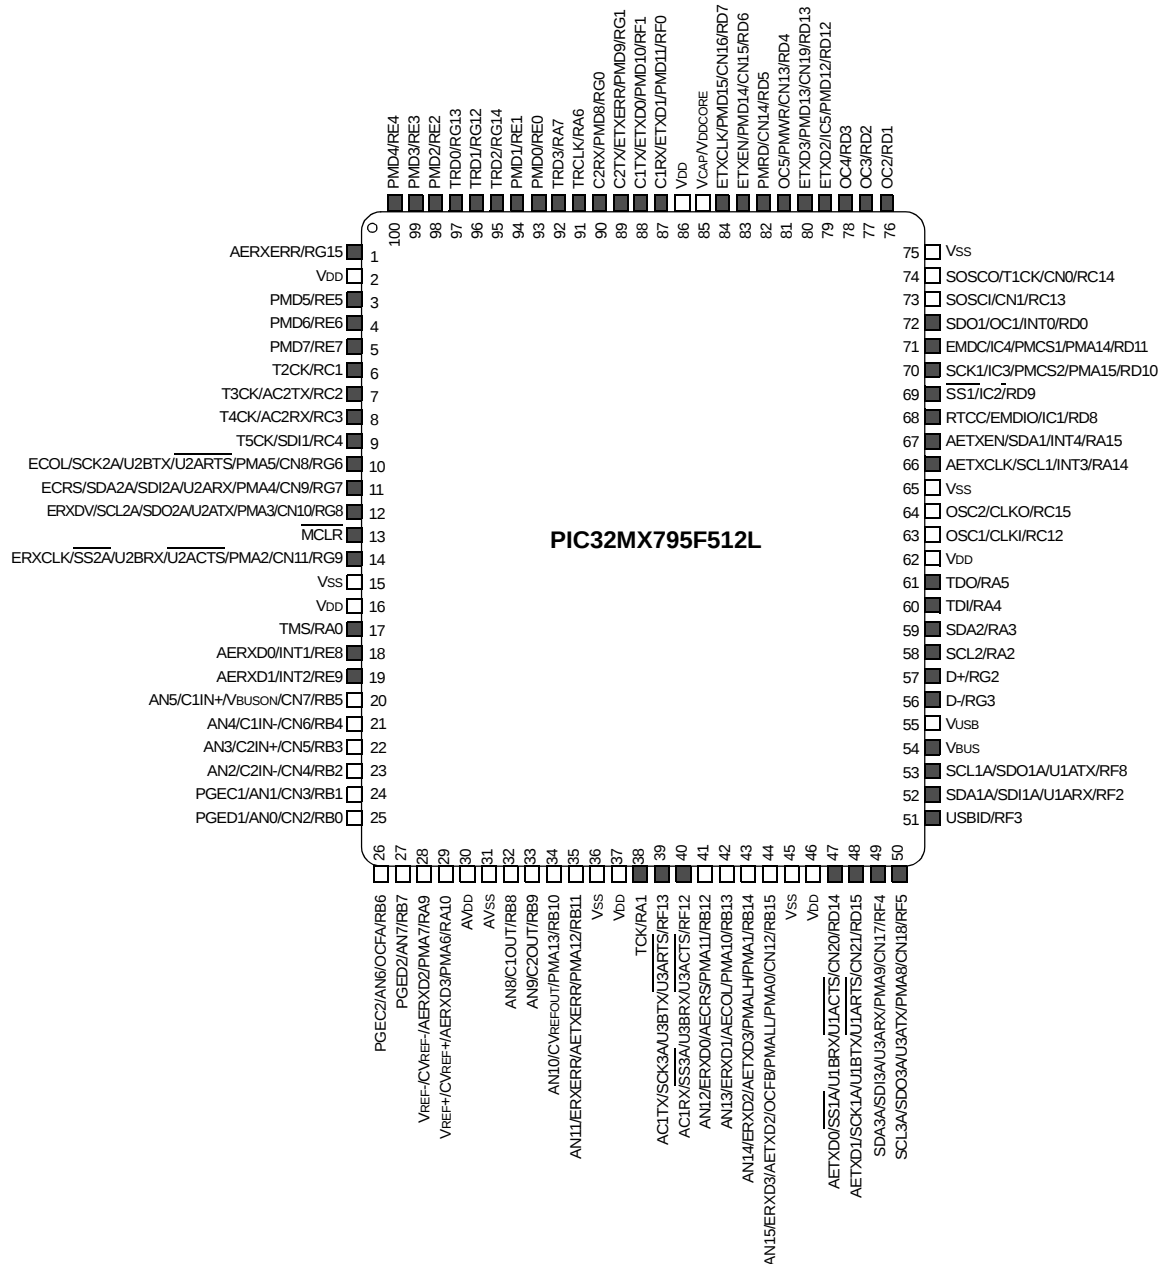

# PIC32MX5XX/6XX/7XX

## Pin Diagrams (Continued)

121-Pin XBGA<sup>(1)</sup>

● = Pins are up to 5V tolerant

PIC32MX575F256L  
PIC32MX575F512L  
PIC32MX675F512L  
PIC32MX695F512L  
PIC32MX795F512L

|   | 1         | 2         | 3         | 4         | 5         | 6         | 7                     | 8         | 9         | 10        | 11        |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------------------|-----------|-----------|-----------|-----------|
| A | ●<br>RE4  | ●<br>RE3  | ●<br>RG13 | ●<br>RE0  | ●<br>RG0  | ●<br>RF1  | ○<br>VDD              | ○<br>VSS  | ●<br>RD12 | ●<br>RD2  | ●<br>RD1  |
| B | ●<br>NC   | ●<br>RG15 | ●<br>RE2  | ●<br>RE1  | ●<br>RA7  | ●<br>RF0  | ○<br>VCAP/<br>VDDCORE | ●<br>RD5  | ●<br>RD3  | ○<br>VSS  | ○<br>RC14 |
| C | ●<br>RE6  | ○<br>VDD  | ●<br>RG12 | ●<br>RG14 | ●<br>RA6  | ●<br>NC   | ●<br>RD7              | ●<br>RD4  | ○<br>VDD  | ○<br>RC13 | ●<br>RD11 |
| D | ●<br>RC1  | ●<br>RE7  | ●<br>RE5  | ○<br>VSS  | ○<br>VSS  | ●<br>NC   | ●<br>RD6              | ●<br>RD13 | ●<br>RD0  | ●<br>NC   | ●<br>RD10 |
| E | ●<br>RC4  | ●<br>RC3  | ●<br>RG6  | ●<br>RC2  | ○<br>VDD  | ●<br>RG1  | ○<br>VSS              | ●<br>RA15 | ●<br>RD8  | ●<br>RD9  | ●<br>RA14 |
| F | ●<br>MCLR | ●<br>RG8  | ●<br>RG9  | ●<br>RG7  | ○<br>VSS  | ●<br>NC   | ●<br>NC               | ○<br>VDD  | ○<br>RC12 | ○<br>VSS  | ○<br>RC15 |
| G | ●<br>RE8  | ●<br>RE9  | ●<br>RA0  | ●<br>NC   | ○<br>VDD  | ○<br>VSS  | ○<br>VSS              | ●<br>NC   | ●<br>RA5  | ●<br>RA3  | ●<br>RA4  |
| H | ○<br>RB5  | ○<br>RB4  | ○<br>VSS  | ○<br>VDD  | ●<br>NC   | ○<br>VDD  | ●<br>NC               | ●<br>VBUS | ○<br>VUSB | ●<br>RG2  | ●<br>RA2  |
| J | ○<br>RB3  | ○<br>RB2  | ○<br>RB7  | ○<br>AVDD | ○<br>RB11 | ○<br>RA1  | ○<br>RB12             | ●<br>NC   | ●<br>NC   | ●<br>RF8  | ○<br>RG3  |
| K | ○<br>RB1  | ○<br>RB0  | ○<br>RA10 | ○<br>RB8  | ●<br>NC   | ●<br>RF12 | ○<br>RB14             | ○<br>VDD  | ●<br>RD15 | ●<br>RF3  | ●<br>RF2  |
| L | ○<br>RB6  | ○<br>RA9  | ○<br>AVSS | ○<br>RB9  | ○<br>RB10 | ●<br>RF13 | ○<br>RB13             | ○<br>RB15 | ●<br>RD14 | ●<br>RF4  | ●<br>RF5  |

**Note 1:** Refer to Table 2, Table 3, and Table 4 for full pin names.

# PIC32MX5XX/6XX/7XX

**TABLE 2: PIN NAMES: PIC32MX575F256L AND PIC32MX575F512L DEVICES**

| Pin Number | Full Pin Name                   | Pin Number | Full Pin Name                   |
|------------|---------------------------------|------------|---------------------------------|
| A1         | PMD4/RE4                        | E8         | SDA1/INT4/RA15                  |
| A2         | PMD3/RE3                        | E9         | RTCC/IC1/RD8                    |
| A3         | TRD0/RG13                       | E10        | SS1/IC2/RD9                     |
| A4         | PMD0/RE0                        | E11        | SCL1/INT3/RA14                  |
| A5         | PMD8/RG0                        | F1         | MCLR                            |
| A6         | C1TX/PMD10/RF1                  | F2         | SCL2A/SDO2A/U2ATX/PMA3/CN10/RG8 |
| A7         | VDD                             | F3         | SS2A/U2BRX/U2ACTS/PMA2/CN11/RG9 |
| A8         | VSS                             | F4         | SDA2A/SDI2A/U2ARX/PMA4/CN9/RG7  |
| A9         | IC5/PMD12/RD12                  | F5         | VSS                             |
| A10        | OC3/RD2                         | F6         | No Connect (NC)                 |
| A11        | OC2/RD1                         | F7         | No Connect (NC)                 |
| B1         | No Connect (NC)                 | F8         | VDD                             |
| B2         | RG15                            | F9         | OSC1/CLKI/RC12                  |
| B3         | PMD2/RE2                        | F10        | VSS                             |
| B4         | PMD1/RE1                        | F11        | OSC2/CLKO/RC15                  |
| B5         | TRD3/RA7                        | G1         | INT1/RE8                        |
| B6         | C1RX/PMD11/RF0                  | G2         | INT2/RE9                        |
| B7         | VCAP/VDDCORE                    | G3         | TMS/RA0                         |
| B8         | PMRD/CN14/RD5                   | G4         | No Connect (NC)                 |
| B9         | OC4/RD3                         | G5         | VDD                             |
| B10        | VSS                             | G6         | VSS                             |
| B11        | SOSCO/T1CK/CN0/RC14             | G7         | VSS                             |
| C1         | PMD6/RE6                        | G8         | No Connect (NC)                 |
| C2         | VDD                             | G9         | TDO/RA5                         |
| C3         | TRD1/RG12                       | G10        | SDA2/RA3                        |
| C4         | TRD2/RG14                       | G11        | TDI/RA4                         |
| C5         | TRCLK/RA6                       | H1         | AN5/C1IN+/VBUSON/CN7/RB5        |
| C6         | No Connect (NC)                 | H2         | AN4/C1IN-/CN6/RB4               |
| C7         | PMD15/CN16/RD7                  | H3         | VSS                             |
| C8         | OC5/PMWR/CN13/RD4               | H4         | VDD                             |
| C9         | VDD                             | H5         | No Connect (NC)                 |
| C10        | SOSCI/CN1/RC13                  | H6         | VDD                             |
| C11        | IC4/PMCS1/PMA14/RD11            | H7         | No Connect (NC)                 |
| D1         | T2CK/RC1                        | H8         | VBUS                            |
| D2         | PMD7/RE7                        | H9         | VUSB                            |
| D3         | PMD5/RE5                        | H10        | D+/RG2                          |
| D4         | VSS                             | H11        | SCL2/RA2                        |
| D5         | VSS                             | J1         | AN3/C2IN+/CN5/RB3               |
| D6         | No Connect (NC)                 | J2         | AN2/C2IN-/CN4/RB2               |
| D7         | PMD14/CN15/RD6                  | J3         | PGED2/AN7/RB7                   |
| D8         | PMD13/CN19/RD13                 | J4         | AVDD                            |
| D9         | SDO1/OC1/INT0/RD0               | J5         | AN11/PMA12/RB11                 |
| D10        | No Connect (NC)                 | J6         | TCK/RA1                         |
| D11        | SCK1/IC3/PMCS2/PMA15/RD10       | J7         | AN12/PMA11/RB12                 |
| E1         | T5CK/SDI1/RC4                   | J8         | No Connect (NC)                 |
| E2         | T4CK/RC3                        | J9         | No Connect (NC)                 |
| E3         | SCK2A/U2BTX/U2ARTS/PMA5/CN8/RG6 | J10        | SCL1A/SDO1A/U1ATX/RF8           |
| E4         | T3CK/RC2                        | J11        | D-/RG3                          |
| E5         | VDD                             | K1         | PGEC1/AN1/CN3/RB1               |
| E6         | PMD9/RG1                        | K2         | PGED1/AN0/CN2/RB0               |
| E7         | VSS                             | K3         | VREF+/CVREF+/PMA6/RA10          |

# PIC32MX5XX/6XX/7XX

**TABLE 2: PIN NAMES: PIC32MX575F256L AND PIC32MX575F512L DEVICES (CONTINUED)**

| Pin Number | Full Pin Name                |
|------------|------------------------------|
| K4         | AN8/C1OUT/RB8                |
| K5         | No Connect (NC)              |
| K6         | AC1RX/SS3A/U3BRX/U3ACTS/RF12 |
| K7         | AN14/PMALH/PMA1/RB14         |
| K8         | VDD                          |
| K9         | SCK1A/U1BTX/U1ARTS/CN21/RD15 |
| K10        | USBID/RF3                    |
| K11        | SDA1A/SDI1A/U1ARX/RF2        |
| L1         | PGEC2/AN6/OCFA/RB6           |
| L2         | VREF-/CVREF-/PMA7/RA9        |

| Pin Number | Full Pin Name                   |
|------------|---------------------------------|
| L3         | AVSS                            |
| L4         | AN9/C2OUT/RB9                   |
| L5         | AN10/CVREFOUT/PMA13/RB10        |
| L6         | AC1TX/SCK3A/U3BTX/U3ARTS/RF13   |
| L7         | AN13/PMA10/RB13                 |
| L8         | AN15/OCFB/PMALL/PMA0/CN12/RB15  |
| L9         | SS1A/U1BRX/U1ACTS/CN20/RD14     |
| L10        | SDA3A/SDI3A/U3ARX/PMA9/CN17/RF4 |
| L11        | SCL3A/SDO3A/U3ATX/PMA8/CN18/RF5 |

# PIC32MX5XX/6XX/7XX

**TABLE 3: PIN NAMES: PIC32MX675F512L AND PIC32MX695F512L DEVICES**

| Pin Number | Full Pin Name                        | Pin Number | Full Pin Name                          |
|------------|--------------------------------------|------------|----------------------------------------|
| A1         | PMD4/RE4                             | E8         | AETXEN/SDA1/INT4/RA15                  |
| A2         | PMD3/RE3                             | E9         | RTCC/EMDIO/IC1/RD8                     |
| A3         | TRD0/RG13                            | E10        | SS1/IC2/RD9                            |
| A4         | PMD0/RE0                             | E11        | AETXCLK/SCL1/INT3/RA14                 |
| A5         | PMD8/RG0                             | F1         | MCLR                                   |
| A6         | ETXD0/PMD10/RF1                      | F2         | ERXDV/SCL2A/SDO2A/U2ATX/PMA3/CN10/RG8  |
| A7         | VDD                                  | F3         | ERXCLK/SS2A/U2BRX/U2ACTS/PMA2/CN11/RG9 |
| A8         | VSS                                  | F4         | ECRS/SDA2A/SDI2A/U2ARX/PMA4/CN9/RG7    |
| A9         | ETXD2/IC5/PMD12/RD12                 | F5         | VSS                                    |
| A10        | OC3/RD2                              | F6         | No Connect (NC)                        |
| A11        | OC2/RD1                              | F7         | No Connect (NC)                        |
| B1         | No Connect (NC)                      | F8         | VDD                                    |
| B2         | AERXERR/RG15                         | F9         | OSC1/CLKI/RC12                         |
| B3         | PMD2/RE2                             | F10        | VSS                                    |
| B4         | PMD1/RE1                             | F11        | OSC2/CLKO/RC15                         |
| B5         | TRD3/RA7                             | G1         | AERXD0/INT1/RE8                        |
| B6         | ETXD1/PMD11/RF0                      | G2         | AERXD1/INT2/RE9                        |
| B7         | VCAP/VDDCORE                         | G3         | TMS/RA0                                |
| B8         | PMRD/CN14/RD5                        | G4         | No Connect (NC)                        |
| B9         | OC4/RD3                              | G5         | VDD                                    |
| B10        | VSS                                  | G6         | VSS                                    |
| B11        | SOSCO/T1CK/CN0/RC14                  | G7         | VSS                                    |
| C1         | PMD6/RE6                             | G8         | No Connect (NC)                        |
| C2         | VDD                                  | G9         | TDO/RA5                                |
| C3         | TRD1/RG12                            | G10        | SDA2/RA3                               |
| C4         | TRD2/RG14                            | G11        | TDI/RA4                                |
| C5         | TRCLK/RA6                            | H1         | AN5/C1IN+/VBUSON/CN7/RB5               |
| C6         | No Connect (NC)                      | H2         | AN4/C1IN-/CN6/RB4                      |
| C7         | ETXCLK/PMD15/CN16/RD7                | H3         | VSS                                    |
| C8         | OC5/PMWR/CN13/RD4                    | H4         | VDD                                    |
| C9         | VDD                                  | H5         | No Connect (NC)                        |
| C10        | SOSCI/CN1/RC13                       | H6         | VDD                                    |
| C11        | EMDC/IC4/PMCS1/PMA14/RD11            | H7         | No Connect (NC)                        |
| D1         | T2CK/RC1                             | H8         | VBUS                                   |
| D2         | PMD7/RE7                             | H9         | VUSB                                   |
| D3         | PMD5/RE5                             | H10        | D+/RG2                                 |
| D4         | VSS                                  | H11        | SCL2/RA2                               |
| D5         | VSS                                  | J1         | AN3/C2IN+/CN5/RB3                      |
| D6         | No Connect (NC)                      | J2         | AN2/C2IN-/CN4/RB2                      |
| D7         | ETXEN/PMD14/CN15/RD6                 | J3         | PGED2/AN7/RB7                          |
| D8         | ETXD3/PMD13/CN19/RD13                | J4         | AVDD                                   |
| D9         | SDO1/OC1/INT0/RD0                    | J5         | AN11/ERXERR/AETXERR/PMA12/RB11         |
| D10        | No Connect (NC)                      | J6         | TCK/RA1                                |
| D11        | SCK1/IC3/PMCS2/PMA15/RD10            | J7         | AN12/ERXD0/AECRS/PMA11/RB12            |
| E1         | T5CK/SDI1/RC4                        | J8         | No Connect (NC)                        |
| E2         | T4CK/RC3                             | J9         | No Connect (NC)                        |
| E3         | ECOL/SCK2A/U2BTX/U2ARTS/PMA5/CN8/RG6 | J10        | SCL1A/SDO1A/U1ATX/RF8                  |
| E4         | T3CK/RC2                             | J11        | D-/RG3                                 |
| E5         | VDD                                  | K1         | PGEC1/AN1/CN3/RB1                      |
| E6         | EXTERR/PMD9/RG1                      | K2         | PGED1/AN0/CN2/RB0                      |
| E7         | VSS                                  | K3         | VREF+/CVREF+/AERXD3/PMA6/RA10          |

# PIC32MX5XX/6XX/7XX

TABLE 3: PIN NAMES: PIC32MX675F512L AND PIC32MX695F512L DEVICES (CONTINUED)

| Pin Number | Full Pin Name                       |
|------------|-------------------------------------|
| K4         | AN8/C1OUT/RB8                       |
| K5         | No Connect (NC)                     |
| K6         | SS3A/U3BRX/U3ACTS/RF12              |
| K7         | AN14/ERXD2/AETXD3/PMALH/PMA1/RB14   |
| K8         | VDD                                 |
| K9         | AETXD1/SCK1A/U1BTX/U1ARTS/CN21/RD15 |
| K10        | USBID/RF3                           |
| K11        | SDA1A/SDI1A/U1ARX/RF2               |
| L1         | PGEC2/AN6/OCFA/RB6                  |
| L2         | VREF-/CVREF-/AERXD2/PMA7/RA9        |

| Pin Number | Full Pin Name                               |
|------------|---------------------------------------------|
| L3         | AVss                                        |
| L4         | AN9/C2OUT/RB9                               |
| L5         | AN10/CVREFOUT/PMA13/RB10                    |
| L6         | SCK3A/U3BTX/U3ARTS/RF13                     |
| L7         | AN13/ERXD1/AECOL/PMA10/RB13                 |
| L8         | AN15/ERXD3/AETXD2/OCFB/PMALL/PMA0/CN12/RB15 |
| L9         | AETXD0/SS1A/U1BRX/U1ACTS/CN20/RD14          |
| L10        | SDA3A/SDI3A/U3ARX/PMA9/CN17/RF4             |
| L11        | SCL3A/SDO3A/U3ATX/PMA8/CN18/RF5             |

# PIC32MX5XX/6XX/7XX

**TABLE 4: PIN NAMES: PIC32MX795F512L DEVICE**

| Pin Number | Full Pin Name                                       | Pin Number | Full Pin Name                                                        |
|------------|-----------------------------------------------------|------------|----------------------------------------------------------------------|
| A1         | PMD4/RE4                                            | E8         | AETXEN/SDA1/INT4/RA15                                                |
| A2         | PMD3/RE3                                            | E9         | RTCC/EMDIO/IC1/RD8                                                   |
| A3         | TRD0/RG13                                           | E10        | $\overline{SS1}$ /IC2/RD9                                            |
| A4         | PMD0/RE0                                            | E11        | AETXCLK/SCL1/INT3/RA14                                               |
| A5         | C2RX/PMD8/RG0                                       | F1         | $\overline{MCLR}$                                                    |
| A6         | C1TX/ETXD0/PMD10/RF1                                | F2         | ERXDV/SCL2A/SDO2A/U2ATX/PMA3/CN10/RG8                                |
| A7         | VDD                                                 | F3         | ERXCLK/ $\overline{SS2A}$ /U2BRX/ $\overline{U2ACTS}$ /PMA2/CN11/RG9 |
| A8         | VSS                                                 | F4         | ECRS/SDA2A/SDI2A/U2ARX/PMA4/CN9/RG7                                  |
| A9         | ETXD2/IC5/PMD12/RD12                                | F5         | VSS                                                                  |
| A10        | OC3/RD2                                             | F6         | No Connect (NC)                                                      |
| A11        | OC2/RD1                                             | F7         | No Connect (NC)                                                      |
| B1         | No Connect (NC)                                     | F8         | VDD                                                                  |
| B2         | AERXERR/RG15                                        | F9         | OSC1/CLKI/RC12                                                       |
| B3         | PMD2/RE2                                            | F10        | VSS                                                                  |
| B4         | PMD1/RE1                                            | F11        | OSC2/CLKO/RC15                                                       |
| B5         | TRD3/RA7                                            | G1         | AERXD0/INT1/RE8                                                      |
| B6         | C1RX/ETXD1/PMD11/RF0                                | G2         | AERXD1/INT2/RE9                                                      |
| B7         | VCAP/VDDCORE                                        | G3         | TMS/RA0                                                              |
| B8         | PMRD/CN14/RD5                                       | G4         | No Connect (NC)                                                      |
| B9         | OC4/RD3                                             | G5         | VDD                                                                  |
| B10        | VSS                                                 | G6         | VSS                                                                  |
| B11        | SOSCO/T1CK/CN0/RC14                                 | G7         | VSS                                                                  |
| C1         | PMD6/RE6                                            | G8         | No Connect (NC)                                                      |
| C2         | VDD                                                 | G9         | TDO/RA5                                                              |
| C3         | TRD1/RG12                                           | G10        | SDA2/RA3                                                             |
| C4         | TRD2/RG14                                           | G11        | TDI/RA4                                                              |
| C5         | TRCLK/RA6                                           | H1         | AN5/C1IN+/VBUSON/CN7/RB5                                             |
| C6         | No Connect (NC)                                     | H2         | AN4/C1IN-/CN6/RB4                                                    |
| C7         | ETXCLK/PMD15/CN16/RD7                               | H3         | VSS                                                                  |
| C8         | OC5/PMWR/CN13/RD4                                   | H4         | VDD                                                                  |
| C9         | VDD                                                 | H5         | No Connect (NC)                                                      |
| C10        | SOSCI/CN1/RC13                                      | H6         | VDD                                                                  |
| C11        | EMDC/IC4/PMCS1/PMA14/RD11                           | H7         | No Connect (NC)                                                      |
| D1         | T2CK/RC1                                            | H8         | VBUS                                                                 |
| D2         | PMD7/RE7                                            | H9         | VUSB                                                                 |
| D3         | PMD5/RE5                                            | H10        | D+/RG2                                                               |
| D4         | VSS                                                 | H11        | SCL2/RA2                                                             |
| D5         | VSS                                                 | J1         | AN3/C2IN+/CN5/RB3                                                    |
| D6         | No Connect (NC)                                     | J2         | AN2/C2IN-/CN4/RB2                                                    |
| D7         | ETXEN/PMD14/CN15/RD6                                | J3         | PGED2/AN7/RB7                                                        |
| D8         | ETXD3/PMD13/CN19/RD13                               | J4         | AVDD                                                                 |
| D9         | SDO1/OC1/INT0/RD0                                   | J5         | AN11/ERXERR/AETXERR/PMA12/RB11                                       |
| D10        | No Connect (NC)                                     | J6         | TCK/RA1                                                              |
| D11        | SCK1/IC3/PMCS2/PMA15/RD10                           | J7         | AN12/ERXD0/AECRS/PMA11/RB12                                          |
| E1         | T5CK/SDI1/RC4                                       | J8         | No Connect (NC)                                                      |
| E2         | T4CK/AC2RX/RC3                                      | J9         | No Connect (NC)                                                      |
| E3         | ECOL/SCK2A/U2BTX/ $\overline{U2ARTS}$ /PMA5/CN8/RG6 | J10        | SCL1A/SDO1A/U1ATX/RF8                                                |
| E4         | T3CK/AC2TX/RC2                                      | J11        | D-/RG3                                                               |
| E5         | VDD                                                 | K1         | PGEC1/AN1/CN3/RB1                                                    |
| E6         | C2TX/EXTERR/PMD9/RG1                                | K2         | PGED1/AN0/CN2/RB0                                                    |
| E7         | VSS                                                 | K3         | VREF+/CVREF+/AERXD3/PMA6/RA10                                        |

# PIC32MX5XX/6XX/7XX

TABLE 4: PIN NAMES: PIC32MX795F512L DEVICE

| Pin Number | Full Pin Name                       |
|------------|-------------------------------------|
| K4         | AN8/C1OUT/RB8                       |
| K5         | No Connect (NC)                     |
| K6         | AC1RX/SS3A/U3BRX/U3ACTS/RF12        |
| K7         | AN14/ERXD2/AETXD3/PMALH/PMA1/RB14   |
| K8         | VDD                                 |
| K9         | AETXD1/SCK1A/U1BTX/U1ARTS/CN21/RD15 |
| K10        | USBID/RF3                           |
| K11        | SDA1A/SDI1A/U1ARX/RF2               |
| L1         | PGEC2/AN6/OCFA/RB6                  |
| L2         | VREF-/CVREF-/AERXD2/PMA7/RA9        |

| Pin Number | Full Pin Name                               |
|------------|---------------------------------------------|
| L3         | AVss                                        |
| L4         | AN9/C2OUT/RB9                               |
| L5         | AN10/CVREFOUT/PMA13/RB10                    |
| L6         | AC1TX/SCK3A/U3BTX/U3ARTS/RF13               |
| L7         | AN13/ERXD1/AECOL/PMA10/RB13                 |
| L8         | AN15/ERXD3/AETXD2/OCFB/PMALL/PMA0/CN12/RB15 |
| L9         | AETXD0/SS1A/U1BRX/U1ACTS/CN20/RD14          |
| L10        | SDA3A/SDI3A/U3ARX/PMA9/CN17/RF4             |
| L11        | SCL3A/SDO3A/U3ATX/PMA8/CN18/RF5             |

## Table of Contents

|      |                                                                   |     |
|------|-------------------------------------------------------------------|-----|
| 1.0  | Device Overview .....                                             | 23  |
| 2.0  | Guidelines for Getting Started with 32-bit Microcontrollers ..... | 35  |
| 3.0  | PIC32MX MCU .....                                                 | 39  |
| 4.0  | Memory Organization .....                                         | 45  |
| 5.0  | Flash Program Memory .....                                        | 105 |
| 6.0  | Resets .....                                                      | 107 |
| 7.0  | Interrupt Controller .....                                        | 109 |
| 8.0  | Oscillator Configuration .....                                    | 113 |
| 9.0  | Prefetch Cache .....                                              | 115 |
| 10.0 | Direct Memory Access (DMA) Controller .....                       | 117 |
| 11.0 | USB On-The-Go (OTG) .....                                         | 119 |
| 12.0 | I/O Ports .....                                                   | 121 |
| 13.0 | Timer1 .....                                                      | 123 |
| 14.0 | Timer2/3, Timer4/5 .....                                          | 125 |
| 15.0 | Input Capture .....                                               | 127 |
| 16.0 | Output Compare .....                                              | 129 |
| 17.0 | Serial Peripheral Interface (SPI) .....                           | 131 |
| 18.0 | Inter-Integrated Circuit (I <sup>2</sup> C™) .....                | 133 |
| 19.0 | Universal Asynchronous Receiver Transmitter (UART) .....          | 135 |
| 20.0 | Parallel Master Port (PMP) .....                                  | 137 |
| 21.0 | Real-Time Clock and Calendar (RTCC) .....                         | 139 |
| 22.0 | 10-bit Analog-to-Digital Converter (ADC) .....                    | 141 |
| 23.0 | Controller Area Network (CAN) .....                               | 143 |
| 24.0 | Ethernet Controller .....                                         | 145 |
| 25.0 | Comparator .....                                                  | 147 |
| 26.0 | Comparator Voltage Reference (CVref) .....                        | 149 |
| 27.0 | Power-Saving Features .....                                       | 151 |
| 28.0 | Special Features .....                                            | 153 |
| 29.0 | Instruction Set .....                                             | 167 |
| 30.0 | Development Support .....                                         | 173 |
| 31.0 | Electrical Characteristics .....                                  | 177 |
| 32.0 | Packaging Information .....                                       | 219 |
|      | Index .....                                                       | 237 |

## TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at [docerrors@microchip.com](mailto:docerrors@microchip.com) or fax the **Reader Response Form** in the back of this data sheet to (480) 792-4150. We welcome your feedback.

### Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

<http://www.microchip.com>

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000A is version A of document DS30000).

### Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; <http://www.microchip.com>
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include literature number) you are using.

### Customer Notification System

Register on our web site at [www.microchip.com](http://www.microchip.com) to receive the most current information on all of our products.

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 1.0 DEVICE OVERVIEW

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the related section of the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).


**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

This document contains device-specific information for PIC32MX5XX/6XX/7XX devices.

Figure 1-1 shows a general block diagram of the core and peripheral modules in the PIC32MX5XX/6XX/7XX family of devices.

Table 1-1 lists the functions of the various pins shown in the pinout diagrams.

**FIGURE 1-1: BLOCK DIAGRAM<sup>(1,2)</sup>**

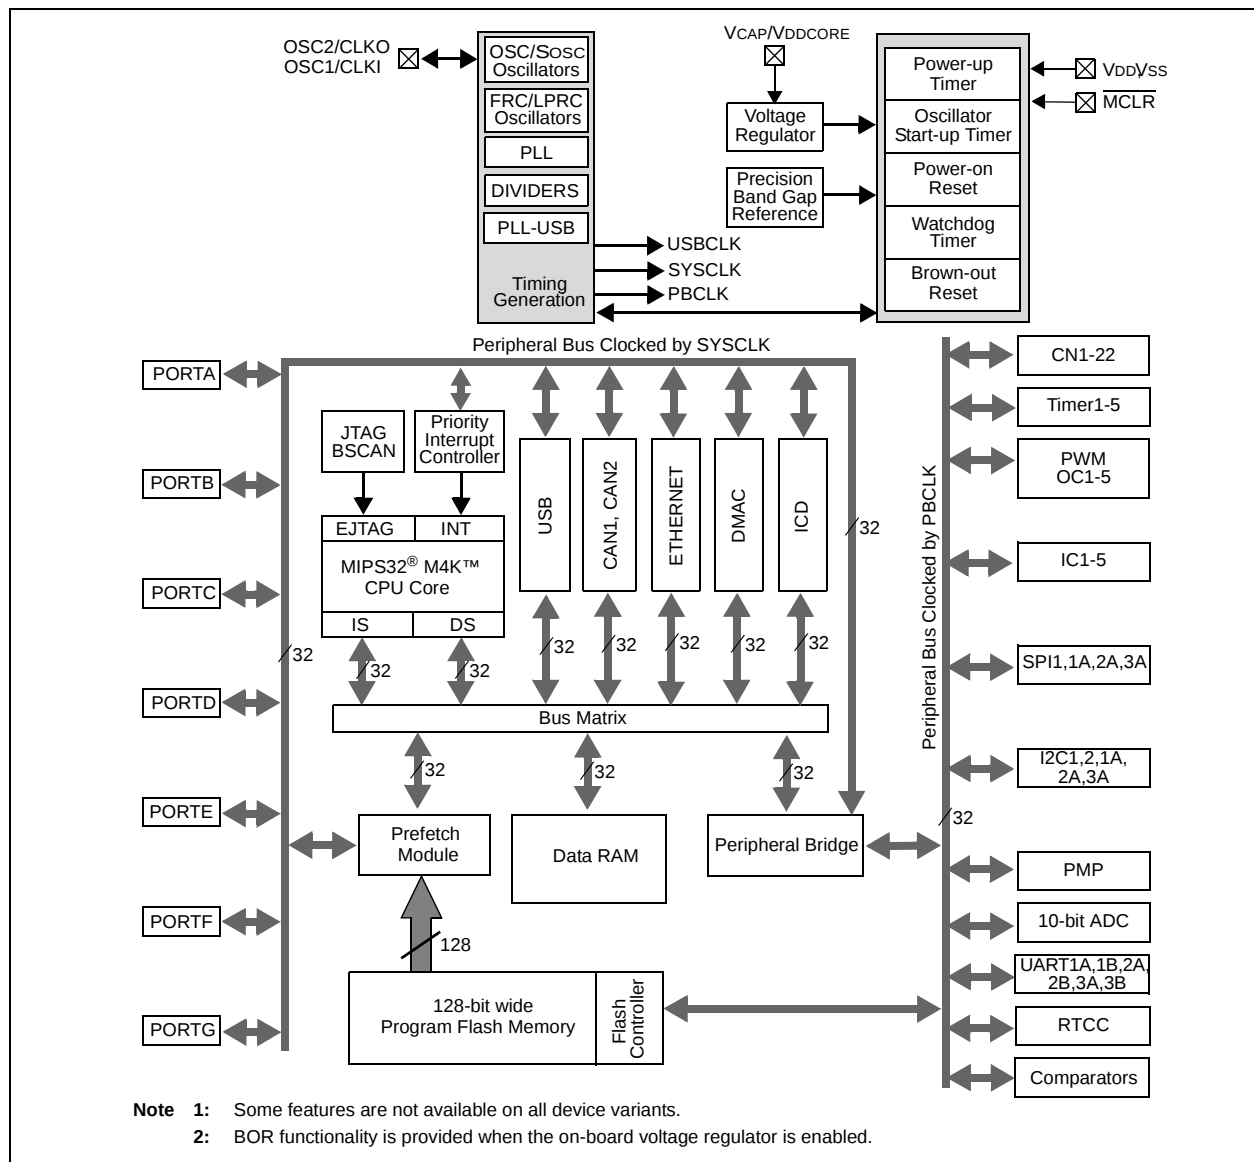

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS**

| Pin Name | Pin Number <sup>(1)</sup> |              |              | Pin Type | Buffer Type | Description                                                                                                                                                                        |
|----------|---------------------------|--------------|--------------|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | 64-pin QFN/TQFP           | 100-pin TQFP | 121-pin XBGA |          |             |                                                                                                                                                                                    |
| AN0      | 16                        | 25           | K2           | I        | Analog      | Analog input channels.                                                                                                                                                             |
| AN1      | 15                        | 24           | K1           | I        | Analog      |                                                                                                                                                                                    |
| AN2      | 14                        | 23           | J2           | I        | Analog      |                                                                                                                                                                                    |
| AN3      | 13                        | 22           | J1           | I        | Analog      |                                                                                                                                                                                    |
| AN4      | 12                        | 21           | H2           | I        | Analog      |                                                                                                                                                                                    |
| AN5      | 11                        | 20           | H1           | I        | Analog      |                                                                                                                                                                                    |
| AN6      | 17                        | 26           | L1           | I        | Analog      |                                                                                                                                                                                    |
| AN7      | 18                        | 27           | J3           | I        | Analog      |                                                                                                                                                                                    |
| AN8      | 21                        | 32           | K4           | I        | Analog      |                                                                                                                                                                                    |
| AN9      | 22                        | 33           | L4           | I        | Analog      |                                                                                                                                                                                    |
| AN10     | 23                        | 34           | L5           | I        | Analog      |                                                                                                                                                                                    |
| AN11     | 24                        | 35           | J5           | I        | Analog      |                                                                                                                                                                                    |
| AN12     | 27                        | 41           | J7           | I        | Analog      |                                                                                                                                                                                    |
| AN13     | 28                        | 42           | L7           | I        | Analog      |                                                                                                                                                                                    |
| AN14     | 29                        | 43           | K7           | I        | Analog      |                                                                                                                                                                                    |
| AN15     | 30                        | 44           | L8           | I        | Analog      |                                                                                                                                                                                    |
| CLKI     | 39                        | 63           | F9           | I        | ST/CMOS     | External clock source input. Always associated with OSC1 pin function.                                                                                                             |
| CLKO     | 40                        | 64           | F11          | O        | —           | Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode. Optionally functions as CLKO in RC and EC modes. Always associated with OSC2 pin function. |
| OSC1     | 39                        | 63           | F9           | I        | ST/CMOS     | Oscillator crystal input. ST buffer when configured in RC mode; CMOS otherwise.                                                                                                    |
| OSC2     | 40                        | 64           | F11          | I/O      | —           | Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode. Optionally functions as CLKO in RC and EC modes.                                           |
| SOSCI    | 47                        | 73           | C10          | I        | ST/CMOS     | 32.768 kHz low-power oscillator crystal input; CMOS otherwise.                                                                                                                     |
| SOSCO    | 48                        | 74           | B11          | O        | —           | 32.768 kHz low-power oscillator crystal output.                                                                                                                                    |

**Legend:** CMOS = CMOS compatible input or output  
 ST = Schmitt Trigger input with CMOS levels  
 TTL = TTL input buffer

Analog = Analog input      P = Power  
 O = Output      I = Input

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name | Pin Number <sup>(1)</sup> |              |              | Pin Type | Buffer Type | Description                                                                                         |
|----------|---------------------------|--------------|--------------|----------|-------------|-----------------------------------------------------------------------------------------------------|
|          | 64-pin QFN/TQFP           | 100-pin TQFP | 121-pin XBGA |          |             |                                                                                                     |
| CN0      | 48                        | 74           | B11          | I        | ST          | Change notification inputs.<br>Can be software programmed for internal weak pull-ups on all inputs. |
| CN1      | 47                        | 73           | C10          | I        | ST          |                                                                                                     |
| CN2      | 16                        | 25           | K2           | I        | ST          |                                                                                                     |
| CN3      | 15                        | 24           | K1           | I        | ST          |                                                                                                     |
| CN4      | 14                        | 23           | J2           | I        | ST          |                                                                                                     |
| CN5      | 13                        | 22           | J1           | I        | ST          |                                                                                                     |
| CN6      | 12                        | 21           | H2           | I        | ST          |                                                                                                     |
| CN7      | 11                        | 20           | H1           | I        | ST          |                                                                                                     |
| CN8      | 4                         | 10           | E3           | I        | ST          |                                                                                                     |
| CN9      | 5                         | 11           | F4           | I        | ST          |                                                                                                     |
| CN10     | 6                         | 12           | F2           | I        | ST          |                                                                                                     |
| CN11     | 8                         | 14           | F3           | I        | ST          |                                                                                                     |
| CN12     | 30                        | 44           | L8           | I        | ST          |                                                                                                     |
| CN13     | 52                        | 81           | C8           | I        | ST          |                                                                                                     |
| CN14     | 53                        | 82           | B8           | I        | ST          |                                                                                                     |
| CN15     | 54                        | 83           | D7           | I        | ST          |                                                                                                     |
| CN16     | 55                        | 84           | C7           | I        | ST          |                                                                                                     |
| CN17     | 31                        | 49           | L10          | I        | ST          |                                                                                                     |
| CN18     | 32                        | 50           | L11          | I        | ST          |                                                                                                     |
| CN19     | —                         | 80           | D8           | I        | ST          |                                                                                                     |
| CN20     | —                         | 47           | L9           | I        | ST          |                                                                                                     |
| CN21     | —                         | 48           | K9           | I        | ST          |                                                                                                     |
| IC1      | 42                        | 68           | E9           | I        | ST          | Capture inputs 1-5.                                                                                 |
| IC2      | 43                        | 69           | E10          | I        | ST          |                                                                                                     |
| IC3      | 44                        | 70           | D11          | I        | ST          |                                                                                                     |
| IC4      | 45                        | 71           | C11          | I        | ST          |                                                                                                     |
| IC5      | 52                        | 79           | A9           | I        | ST          |                                                                                                     |
| OCFA     | 17                        | 26           | L1           | I        | ST          | Output Compare Fault A input.                                                                       |
| OC1      | 46                        | 72           | D9           | O        | —           | Output Compare output 1.                                                                            |
| OC2      | 49                        | 76           | A11          | O        | —           | Output Compare output 2                                                                             |
| OC3      | 50                        | 77           | A10          | O        | —           | Output Compare output 3.                                                                            |
| OC4      | 51                        | 78           | B9           | O        | —           | Output Compare output 4.                                                                            |
| OC5      | 52                        | 81           | C8           | O        | —           | Output Compare output 5.                                                                            |
| OCFB     | 30                        | 44           | L8           | I        | ST          | Output Compare Fault B input.                                                                       |
| INT0     | 46                        | 72           | D9           | I        | ST          | External interrupt 0.                                                                               |
| INT1     | 42                        | 18           | G1           | I        | ST          | External interrupt 1.                                                                               |
| INT2     | 43                        | 19           | G2           | I        | ST          | External interrupt 2.                                                                               |

**Legend:** CMOS = CMOS compatible input or output      Analog = Analog input      P = Power  
ST = Schmitt Trigger input with CMOS levels      O = Output      I = Input  
TTL = TTL input buffer

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name | Pin Number <sup>(1)</sup> |              |              | Pin Type | Buffer Type | Description                        |
|----------|---------------------------|--------------|--------------|----------|-------------|------------------------------------|
|          | 64-pin QFN/TQFP           | 100-pin TQFP | 121-pin XBGA |          |             |                                    |
| INT3     | 44                        | 66           | E11          | I        | ST          | External interrupt 3.              |
| INT4     | 45                        | 67           | E8           | I        | ST          | External interrupt 4.              |
| RA0      | —                         | 17           | G3           | I/O      | ST          | PORTA is a bidirectional I/O port. |
| RA1      | —                         | 38           | J6           | I/O      | ST          |                                    |
| RA2      | —                         | 58           | H11          | I/O      | ST          |                                    |
| RA3      | —                         | 59           | G10          | I/O      | ST          |                                    |
| RA4      | —                         | 60           | G11          | I/O      | ST          |                                    |
| RA5      | —                         | 61           | G9           | I/O      | ST          |                                    |
| RA6      | —                         | 91           | C5           | I/O      | ST          |                                    |
| RA7      | —                         | 92           | B5           | I/O      | ST          |                                    |
| RA9      | —                         | 28           | L2           | I/O      | ST          |                                    |
| RA10     | —                         | 29           | K3           | I/O      | ST          |                                    |
| RA14     | —                         | 66           | E11          | I/O      | ST          |                                    |
| RA15     | —                         | 67           | E8           | I/O      | ST          |                                    |
| RB0      | 16                        | 25           | K2           | I/O      | ST          | PORTB is a bidirectional I/O port. |
| RB1      | 15                        | 24           | K1           | I/O      | ST          |                                    |
| RB2      | 14                        | 23           | J2           | I/O      | ST          |                                    |
| RB3      | 13                        | 22           | J1           | I/O      | ST          |                                    |
| RB4      | 12                        | 21           | H2           | I/O      | ST          |                                    |
| RB5      | 11                        | 20           | H1           | I/O      | ST          |                                    |
| RB6      | 17                        | 26           | L1           | I/O      | ST          |                                    |
| RB7      | 18                        | 27           | J3           | I/O      | ST          |                                    |
| RB8      | 21                        | 32           | K4           | I/O      | ST          |                                    |
| RB9      | 22                        | 33           | L4           | I/O      | ST          |                                    |
| RB10     | 23                        | 34           | L5           | I/O      | ST          |                                    |
| RB11     | 24                        | 35           | J5           | I/O      | ST          |                                    |
| RB12     | 27                        | 41           | J7           | I/O      | ST          |                                    |
| RB13     | 28                        | 42           | L7           | I/O      | ST          |                                    |
| RB14     | 29                        | 43           | K7           | I/O      | ST          |                                    |
| RB15     | 30                        | 44           | L8           | I/O      | ST          |                                    |
| RC1      | —                         | 6            | D1           | I/O      | ST          | PORTC is a bidirectional I/O port. |
| RC2      | —                         | 7            | E4           | I/O      | ST          |                                    |
| RC3      | —                         | 8            | E2           | I/O      | ST          |                                    |
| RC4      | —                         | 9            | E1           | I/O      | ST          |                                    |
| RC12     | 39                        | 63           | F9           | I/O      | ST          |                                    |
| RC13     | 47                        | 73           | C10          | I/O      | ST          |                                    |
| RC14     | 48                        | 74           | B11          | I/O      | ST          |                                    |
| RC15     | 40                        | 64           | F11          | I/O      | ST          |                                    |

**Legend:** CMOS = CMOS compatible input or output  
ST = Schmitt Trigger input with CMOS levels  
TTL = TTL input buffer

Analog = Analog input  
O = Output

P = Power  
I = Input

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name | Pin Number <sup>(1)</sup> |              |              | Pin Type | Buffer Type | Description                        |
|----------|---------------------------|--------------|--------------|----------|-------------|------------------------------------|
|          | 64-pin QFN/TQFP           | 100-pin TQFP | 121-pin XBGA |          |             |                                    |
| RD0      | 46                        | 72           | D9           | I/O      | ST          | PORTD is a bidirectional I/O port. |
| RD1      | 49                        | 76           | A11          | I/O      | ST          |                                    |
| RD2      | 50                        | 77           | A10          | I/O      | ST          |                                    |
| RD3      | 51                        | 78           | B9           | I/O      | ST          |                                    |
| RD4      | 52                        | 81           | C8           | I/O      | ST          |                                    |
| RD5      | 53                        | 82           | B8           | I/O      | ST          |                                    |
| RD6      | 54                        | 83           | D7           | I/O      | ST          |                                    |
| RD7      | 55                        | 84           | C7           | I/O      | ST          |                                    |
| RD8      | 42                        | 68           | E9           | I/O      | ST          |                                    |
| RD9      | 43                        | 69           | E10          | I/O      | ST          |                                    |
| RD10     | 44                        | 70           | D11          | I/O      | ST          |                                    |
| RD11     | 45                        | 71           | C11          | I/O      | ST          |                                    |
| RD12     | —                         | 79           | A9           | I/O      | ST          |                                    |
| RD13     | —                         | 80           | D8           | I/O      | ST          |                                    |
| RD14     | —                         | 47           | L9           | I/O      | ST          |                                    |
| RD15     | —                         | 48           | K9           | I/O      | ST          |                                    |
| RE0      | 60                        | 93           | A4           | I/O      | ST          | PORTE is a bidirectional I/O port. |
| RE1      | 61                        | 94           | B4           | I/O      | ST          |                                    |
| RE2      | 62                        | 98           | B3           | I/O      | ST          |                                    |
| RE3      | 63                        | 99           | A2           | I/O      | ST          |                                    |
| RE4      | 64                        | 100          | A1           | I/O      | ST          |                                    |
| RE5      | 1                         | 3            | D3           | I/O      | ST          |                                    |
| RE6      | 2                         | 4            | C1           | I/O      | ST          |                                    |
| RE7      | 3                         | 5            | D2           | I/O      | ST          |                                    |
| RE8      | —                         | 18           | G1           | I/O      | ST          |                                    |
| RE9      | —                         | 19           | G2           | I/O      | ST          |                                    |
| RF0      | 58                        | 87           | B6           | I/O      | ST          | PORTF is a bidirectional I/O port. |
| RF1      | 59                        | 88           | A6           | I/O      | ST          |                                    |
| RF2      | —                         | 52           | K11          | I/O      | ST          |                                    |
| RF3      | 33                        | 51           | K10          | I/O      | ST          |                                    |
| RF4      | 31                        | 49           | L10          | I/O      | ST          |                                    |
| RF5      | 32                        | 50           | L11          | I/O      | ST          |                                    |
| RF8      | —                         | 53           | J10          | I/O      | ST          |                                    |
| RF12     | —                         | 40           | K6           | I/O      | ST          |                                    |
| RF13     | —                         | 39           | L6           | I/O      | ST          |                                    |

**Legend:** CMOS = CMOS compatible input or output      Analog = Analog input      P = Power  
ST = Schmitt Trigger input with CMOS levels      O = Output      I = Input  
TTL = TTL input buffer

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name | Pin Number <sup>(1)</sup> |              |              | Pin Type | Buffer Type | Description                        |
|----------|---------------------------|--------------|--------------|----------|-------------|------------------------------------|
|          | 64-pin QFN/TQFP           | 100-pin TQFP | 121-pin XBGA |          |             |                                    |
| RG0      | —                         | 90           | A5           | I/O      | ST          | PORTG is a bidirectional I/O port. |
| RG1      | —                         | 89           | E6           | I/O      | ST          |                                    |
| RG6      | 4                         | 10           | E3           | I/O      | ST          |                                    |
| RG7      | 5                         | 11           | F4           | I/O      | ST          |                                    |
| RG8      | 6                         | 12           | F2           | I/O      | ST          |                                    |
| RG9      | 8                         | 14           | F3           | I/O      | ST          |                                    |
| RG12     | —                         | 96           | C3           | I/O      | ST          |                                    |
| RG13     | —                         | 97           | A3           | I/O      | ST          |                                    |
| RG14     | —                         | 95           | C4           | I/O      | ST          |                                    |
| RG15     | —                         | 1            | B2           | I/O      | ST          |                                    |
| RG2      | 37                        | 57           | H10          | I        | ST          | PORTG input pins.                  |
| RG3      | 36                        | 56           | J11          | I        | ST          |                                    |
| T1CK     | 48                        | 74           | B11          | I        | ST          | Timer1 external clock input.       |
| T2CK     | —                         | 6            | D1           | I        | ST          | Timer2 external clock input.       |
| T3CK     | —                         | 7            | E4           | I        | ST          | Timer3 external clock input.       |
| T4CK     | —                         | 8            | E2           | I        | ST          | Timer4 external clock input.       |
| T5CK     | —                         | 9            | E1           | I        | ST          | Timer5 external clock input.       |
| U1ACTS   | 43                        | 47           | L9           | I        | ST          | UART1A clear to send.              |
| U1ARTS   | 49                        | 48           | K9           | O        | —           | UART1A ready to send.              |
| U1ARX    | 50                        | 52           | K11          | I        | ST          | UART1A receive.                    |
| U1ATX    | 51                        | 53           | J10          | O        | —           | UART1A transmit.                   |
| U2ACTS   | 8                         | 14           | F3           | I        | ST          | UART2A clear to send.              |
| U2ARTS   | 4                         | 10           | E3           | O        | —           | UART2A ready to send.              |
| U2ARX    | 5                         | 11           | F4           | I        | ST          | UART2A receive.                    |
| U2ATX    | 6                         | 12           | F2           | O        | —           | UART2A transmit.                   |
| U3ACTS   | 21                        | 40           | K6           | I        | ST          | UART3A clear to send.              |
| U3ARTS   | 29                        | 39           | L6           | O        | —           | UART3A ready to send.              |
| U3ARX    | 31                        | 49           | L10          | I        | ST          | UART3A receive.                    |
| U3ATX    | 32                        | 50           | L11          | O        | —           | UART3A transmit.                   |
| U1BRX    | 43                        | 47           | L9           | I        | ST          | UART1B receive.                    |
| U1BTX    | 49                        | 48           | K9           | O        | —           | UART1B transmit.                   |
| U2BRX    | 8                         | 14           | F3           | I        | ST          | UART2B receive.                    |
| U2BTX    | 4                         | 10           | E3           | O        | —           | UART2B transmit.                   |
| U3BRX    | 21                        | 40           | K6           | I        | ST          | UART3B receive.                    |
| U3BTX    | 29                        | 39           | L6           | O        | —           | UART3B transmit.                   |

**Legend:** CMOS = CMOS compatible input or output      Analog = Analog input      P = Power  
ST = Schmitt Trigger input with CMOS levels      O = Output      I = Input  
TTL = TTL input buffer

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name | Pin Number <sup>(1)</sup> |              |              | Pin Type | Buffer Type | Description                                      |
|----------|---------------------------|--------------|--------------|----------|-------------|--------------------------------------------------|
|          | 64-pin QFN/TQFP           | 100-pin TQFP | 121-pin XBGA |          |             |                                                  |
| SCK1     | —                         | 70           | D11          | I/O      | ST          | Synchronous serial clock input/output for SPI1.  |
| SDI1     | —                         | 9            | E1           | I        | ST          | SPI1 data in.                                    |
| SDO1     | —                         | 72           | D9           | O        | —           | SPI1 data out.                                   |
| SS1      | —                         | 69           | E10          | I/O      | ST          | SPI1 slave synchronization or frame pulse I/O.   |
| SCK1A    | 49                        | 48           | K9           | I/O      | ST          | Synchronous serial clock input/output for SPI1A. |
| SDI1A    | 50                        | 52           | K11          | I        | ST          | SPI1A data in.                                   |
| SDO1A    | 51                        | 53           | J10          | O        | —           | SPI1A data out.                                  |
| SS1A     | 43                        | 47           | L9           | I/O      | ST          | SPI1A slave synchronization or frame pulse I/O.  |
| SCK2A    | 4                         | 10           | E3           | I/O      | ST          | Synchronous serial clock input/output for SPI2A. |
| SDI2A    | 5                         | 11           | F4           | I        | ST          | SPI2A data in.                                   |
| SDO2A    | 6                         | 12           | F2           | O        | —           | SPI2A data out.                                  |
| SS2A     | 8                         | 14           | F3           | I/O      | ST          | SPI2A slave synchronization or frame pulse I/O.  |
| SCK3A    | 29                        | 39           | L6           | I/O      | ST          | Synchronous serial clock input/output for SPI3A. |
| SDI3A    | 31                        | 49           | L10          | I        | ST          | SPI3A data in.                                   |
| SDO3A    | 32                        | 50           | L11          | O        | —           | SPI3A data out.                                  |
| SS3A     | 21                        | 40           | K6           | I/O      | ST          | SPI3A slave synchronization or frame pulse I/O.  |
| SCL1     | 44                        | 66           | E11          | I/O      | ST          | Synchronous serial clock input/output for I2C1.  |
| SDA1     | 43                        | 67           | E8           | I/O      | ST          | Synchronous serial data input/output for I2C1.   |
| SCL1A    | —                         | 58           | H11          | I/O      | ST          | Synchronous serial clock input/output for I2C1A. |
| SDA1A    | —                         | 59           | G10          | I/O      | ST          | Synchronous serial data input/output for I2C1A.  |
| SCL2     | 6                         | 12           | F2           | I/O      | ST          | Synchronous serial clock input/output for I2C2.  |
| SDA2     | 5                         | 11           | F4           | I/O      | ST          | Synchronous serial data input/output for I2C2.   |
| SCL2A    | 32                        | 50           | L11          | I/O      | ST          | Synchronous serial clock input/output for I2C2A. |
| SDA2A    | 31                        | 49           | L10          | I/O      | ST          | Synchronous serial data input/output for I2C2A.  |
| SCL3A    | 23                        | 17           | G3           | I/O      | ST          | Synchronous serial clock input/output for I2C3A. |
| SDA3A    | 27                        | 38           | J6           | I/O      | ST          | Synchronous serial data input/output for I2C3A.  |
| TMS      | 28                        | 60           | G11          | I        | ST          | JTAG Test mode select pin.                       |
| TCK      | 24                        | 61           | G9           | I        | ST          | JTAG test clock input pin.                       |
| TDI      | 42                        | 68           | E9           | I        | ST          | JTAG test data input pin.                        |
| TDO      | 15                        | 28           | L2           | O        | —           | JTAG test data output pin.                       |
| RTCC     | 16                        | 29           | K3           | O        | —           | Real-Time Clock alarm output.                    |
| CVREF-   | 23                        | 34           | L5           | I        | ANA         | Comparator Voltage Reference (low).              |
| CVREF+   | 12                        | 21           | H2           | I        | ANA         | Comparator Voltage Reference (high).             |
| CVREFOUT | 11                        | 20           | H1           | O        | ANA         | Comparator Voltage Reference output.             |
| C1IN-    | 21                        | 32           | K4           | I        | ANA         | Comparator 1 negative input.                     |
| C1IN+    | 14                        | 23           | J2           | I        | ANA         | Comparator 1 positive input.                     |
| C1OUT    | 13                        | 22           | J1           | O        | —           | Comparator 1 output.                             |

**Legend:** CMOS = CMOS compatible input or output      Analog = Analog input      P = Power  
ST = Schmitt Trigger input with CMOS levels      O = Output      I = Input  
TTL = TTL input buffer

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name | Pin Number <sup>(1)</sup> |              |              | Pin Type | Buffer Type | Description                                                                                |
|----------|---------------------------|--------------|--------------|----------|-------------|--------------------------------------------------------------------------------------------|
|          | 64-pin QFN/TQFP           | 100-pin TQFP | 121-pin XBGA |          |             |                                                                                            |
| C2IN-    | 22                        | 33           | L4           | I        | ANA         | Comparator 2 negative input.                                                               |
| C2IN+    | 30                        | 44           | L8           | I        | ANA         | Comparator 2 positive input.                                                               |
| C2OUT    | 29                        | 43           | K7           | O        | —           | Comparator 2 output.                                                                       |
| PMA0     | —                         | 58           | H11          | I/O      | TTL/ST      | Parallel Master Port Address Bit 0 input (Buffered Slave modes) and output (Master modes). |
| PMA1     | —                         | 59           | G10          | I/O      | TTL/ST      | Parallel Master Port Address Bit 1 input (Buffered Slave modes) and output (Master modes). |
| PMA2     | 8                         | 14           | F3           | O        | —           | Parallel Master Port Address (Demultiplexed Master modes).                                 |
| PMA3     | 6                         | 12           | F2           | O        | —           |                                                                                            |
| PMA4     | 5                         | 11           | F4           | O        | —           |                                                                                            |
| PMA5     | 4                         | 10           | E3           | O        | —           |                                                                                            |
| PMA6     | 16                        | 29           | K3           | O        | —           |                                                                                            |
| PMA7     | 22                        | 28           | L2           | O        | —           |                                                                                            |
| PMA8     | 32                        | 50           | L11          | O        | —           |                                                                                            |
| PMA9     | 31                        | 49           | L10          | O        | —           |                                                                                            |
| PMA10    | 28                        | 42           | L7           | O        | —           |                                                                                            |
| PMA11    | 27                        | 41           | J7           | O        | —           |                                                                                            |
| PMA12    | 24                        | 35           | J5           | O        | —           |                                                                                            |
| PMA13    | 23                        | 34           | L5           | O        | —           |                                                                                            |
| PMA14    | 45                        | 71           | C11          | O        | —           |                                                                                            |
| PMA15    | 44                        | 70           | D11          | O        | —           |                                                                                            |
| PMCS1    | 45                        | 71           | C11          | O        | —           | Parallel Master Port Chip Select 1 Strobe.                                                 |
| PMCS2    | 44                        | 70           | D11          | O        | —           | Parallel Master Port Chip Select 2 Strobe.                                                 |

**Legend:** CMOS = CMOS compatible input or output  
ST = Schmitt Trigger input with CMOS levels  
TTL = TTL input buffer

Analog = Analog input  
O = Output

P = Power  
I = Input

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name | Pin Number <sup>(1)</sup> |              |              | Pin Type | Buffer Type | Description                                                                                       |
|----------|---------------------------|--------------|--------------|----------|-------------|---------------------------------------------------------------------------------------------------|
|          | 64-pin QFN/TQFP           | 100-pin TQFP | 121-pin XBGA |          |             |                                                                                                   |
| PMD0     | 60                        | 93           | A4           | I/O      | TTL/ST      | Parallel Master Port Data (Demultiplexed Master mode) or Address/Data (Multiplexed Master modes). |
| PMD1     | 61                        | 94           | B4           | I/O      | TTL/ST      |                                                                                                   |
| PMD2     | 62                        | 98           | B3           | I/O      | TTL/ST      |                                                                                                   |
| PMD3     | 63                        | 99           | A2           | I/O      | TTL/ST      |                                                                                                   |
| PMD4     | 64                        | 100          | A1           | I/O      | TTL/ST      |                                                                                                   |
| PMD5     | 1                         | 3            | D3           | I/O      | TTL/ST      |                                                                                                   |
| PMD6     | 2                         | 4            | C1           | I/O      | TTL/ST      |                                                                                                   |
| PMD7     | 3                         | 5            | D2           | I/O      | TTL/ST      |                                                                                                   |
| PMD8     | —                         | 90           | A5           | I/O      | TTL/ST      |                                                                                                   |
| PMD9     | —                         | 89           | E6           | I/O      | TTL/ST      |                                                                                                   |
| PMD10    | —                         | 88           | A6           | I/O      | TTL/ST      |                                                                                                   |
| PMD11    | —                         | 87           | B6           | I/O      | TTL/ST      |                                                                                                   |
| PMD12    | —                         | 79           | A9           | I/O      | TTL/ST      |                                                                                                   |
| PMD13    | —                         | 80           | D8           | I/O      | TTL/ST      |                                                                                                   |
| PMD14    | —                         | 83           | D7           | I/O      | TTL/ST      |                                                                                                   |
| PMD15    | —                         | 84           | C7           | I/O      | TTL/ST      |                                                                                                   |
| PMALL    | 30                        | 44           | L8           | O        | —           | Parallel Master Port Address Latch Enable low-byte (Multiplexed Master modes).                    |
| PMALH    | 29                        | 43           | K7           | O        | —           | Parallel Master Port Address Latch Enable high-byte (Multiplexed Master modes).                   |
| PMRD     | 53                        | 82           | B8           | O        | —           | Parallel Master Port Read Strobe.                                                                 |
| PMWR     | 52                        | 81           | C8           | O        | —           | Parallel Master Port Write Strobe.                                                                |
| VBUS     | 34                        | 54           | H8           | I        | ANA         | USB bus power monitor.                                                                            |
| VUSB     | 35                        | 55           | H9           | P        | —           | USB internal transceiver supply.                                                                  |
| VBUSON   | 11                        | 20           | H1           | O        | —           | USB Host and OTG bus power control output.                                                        |
| D+       | 37                        | 57           | H10          | I/O      | ANA         | USB D+.                                                                                           |
| D-       | 36                        | 56           | J11          | I/O      | ANA         | USB D-.                                                                                           |
| USBID    | 33                        | 51           | K10          | I        | ST          | USB OTG ID Detect.                                                                                |
| C1RX     | 58                        | 87           | B6           | I        | ST          | CAN1 bus receive pin.                                                                             |
| C1TX     | 59                        | 88           | A6           | O        | —           | CAN1 bus transmit pin.                                                                            |
| AC1RX    | 32                        | 40           | K6           | I        | ST          | Alternate CAN1 bus receive pin.                                                                   |
| AC1TX    | 31                        | 39           | L6           | O        | —           | Alternate CAN1 bus transmit pin.                                                                  |
| C2RX     | 29                        | 90           | A5           | I        | ST          | CAN2 bus receive pin.                                                                             |
| C2TX     | 21                        | 89           | E6           | O        | —           | CAN2 bus transmit pin.                                                                            |
| AC2RX    | —                         | 8            | E2           | I        | ST          | Alternate CAN2 bus receive pin.                                                                   |
| AC2TX    | —                         | 7            | E4           | O        | —           | Alternate CAN2 bus transmit pin.                                                                  |
| ERXD0    | 61                        | 41           | J7           | I        | ST          | Ethernet Receive Data 0.                                                                          |
| ERXD1    | 60                        | 42           | L7           | I        | ST          | Ethernet Receive Data 1.                                                                          |

**Legend:** CMOS = CMOS compatible input or output      Analog = Analog input      P = Power  
ST = Schmitt Trigger input with CMOS levels      O = Output      I = Input  
TTL = TTL input buffer

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name | Pin Number <sup>(1)</sup> |              |              | Pin Type | Buffer Type | Description                             |
|----------|---------------------------|--------------|--------------|----------|-------------|-----------------------------------------|
|          | 64-pin QFN/TQFP           | 100-pin TQFP | 121-pin XBGA |          |             |                                         |
| ERXD2    | 59                        | 43           | K7           | I        | ST          | Ethernet Receive Data 2.                |
| ERXD3    | 58                        | 44           | L8           | I        | ST          | Ethernet Receive Data 3.                |
| ERXERR   | 64                        | 35           | J5           | I        | ST          | Ethernet Receive Error Input.           |
| ERXDV    | 62                        | 12           | F2           | I        | ST          | Ethernet Receive Data Valid.            |
| ERXCLK   | 63                        | 14           | F3           | I        | ST          | Ethernet Receive Clock.                 |
| ETXD0    | 2                         | 88           | A6           | O        | —           | Ethernet Transmit Data 0.               |
| ETXD1    | 3                         | 87           | B6           | O        | —           | Ethernet Transmit Data 1.               |
| ETXD2    | 43                        | 79           | A9           | O        | —           | Ethernet Transmit Data 2.               |
| ETXD3    | 42                        | 80           | D8           | O        | —           | Ethernet Transmit Data 3.               |
| ETXERR   | 54                        | 89           | E6           | O        | —           | Ethernet Transmit Error.                |
| ETXEN    | 1                         | 83           | D7           | O        | —           | Ethernet Transmit Enable.               |
| ETXCLK   | 55                        | 84           | C7           | I        | ST          | Ethernet Transmit Clock.                |
| ECOL     | 44                        | 10           | E3           | I        | ST          | Ethernet Collision Detect.              |
| ECRS     | 45                        | 11           | F4           | I        | ST          | Ethernet MII Carrier Sense.             |
| EMDC     | 30                        | 71           | C11          | O        | —           | Ethernet MII Management Data Clock.     |
| EMDIO    | 49                        | 68           | E9           | I/O      | —           | Ethernet MII Management Data.           |
| AERXD0   | 43                        | 18           | G1           | I        | ST          | Alternate Ethernet Receive Data 0.      |
| AERXD1   | 42                        | 19           | G2           | I        | ST          | Alternate Ethernet Receive Data 1.      |
| AERXD2   | —                         | 28           | L2           | I        | ST          | Alternate Ethernet Receive Data 2.      |
| AERXD3   | —                         | 29           | K3           | I        | ST          | Alternate Ethernet Receive Data 3.      |
| AERXERR  | 55                        | 1            | B2           | I        | ST          | Alternate Ethernet Receive Error Input. |
| AERXDV   | 44                        | —            | —            | I        | ST          | Alternate Ethernet Receive Data Valid.  |
| AERXCLK  | 45                        | —            | —            | I        | ST          | Alternate Ethernet Receive Clock.       |
| AETXD0   | 59                        | 47           | L9           | O        | —           | Alternate Ethernet Transmit Data 0.     |
| AETXD1   | 58                        | 48           | K9           | O        | —           | Alternate Ethernet Transmit Data 1.     |
| AETXD2   | —                         | 44           | L8           | O        | —           | Alternate Ethernet Transmit Data 2.     |
| AETXD3   | —                         | 43           | K7           | O        | —           | Alternate Ethernet Transmit Data 3.     |
| AETXERR  | —                         | 35           | J5           | O        | —           | Alternate Ethernet Transmit Error.      |
| AETXEN   | 54                        | 67           | E8           | O        | —           | Alternate Ethernet Transmit Enable.     |
| AETXCLK  | —                         | 66           | E11          | I        | ST          | Alternate Ethernet Transmit Clock.      |
| AECOL    | —                         | 42           | L7           | I        | ST          | Alternate Ethernet Collision Detect.    |
| AECRS    | —                         | 41           | J7           | I        | ST          | Alternate Ethernet MII Carrier Sense.   |
| TRCLK    | —                         | 91           | C5           | O        | —           | Trace Clock.                            |
| TRD0     | —                         | 97           | A3           | O        | —           | Trace Data Bits 0-3.                    |
| TRD1     | —                         | 96           | C3           | O        | —           |                                         |
| TRD2     | —                         | 95           | C4           | O        | —           |                                         |
| TRD3     | —                         | 92           | B5           | O        | —           |                                         |

**Legend:** CMOS = CMOS compatible input or output  
ST = Schmitt Trigger input with CMOS levels  
TTL = TTL input buffer

Analog = Analog input  
O = Output

P = Power  
I = Input

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name         | Pin Number <sup>(1)</sup> |                       |                                          | Pin Type | Buffer Type | Description                                                                       |
|------------------|---------------------------|-----------------------|------------------------------------------|----------|-------------|-----------------------------------------------------------------------------------|
|                  | 64-pin QFN/TQFP           | 100-pin TQFP          | 121-pin XBGA                             |          |             |                                                                                   |
| PGED1            | 16                        | 25                    | K2                                       | I/O      | ST          | Data I/O pin for programming/debugging communication channel 1.                   |
| PGEC1            | 15                        | 24                    | K1                                       | I        | ST          | Clock input pin for programming/debugging communication channel 1.                |
| PGED2            | 18                        | 27                    | J3                                       | I/O      | ST          | Data I/O pin for programming/debugging communication channel 2.                   |
| PGEC2            | 17                        | 26                    | L1                                       | I        | ST          | Clock input pin for programming/debugging communication channel 2.                |
| MCLR             | 7                         | 13                    | F1                                       | I/P      | ST          | Master Clear (Reset) input. This pin is an active-low Reset to the device.        |
| AVDD             | 19                        | 30                    | J4                                       | P        | P           | Positive supply for analog modules. This pin must be connected at all times.      |
| AVSS             | 20                        | 31                    | L3                                       | P        | P           | Ground reference for analog modules.                                              |
| VDD              | 10, 26, 38, 57            | 2, 16, 37, 46, 62, 86 | A7, C2, C9, E5, K8, F8, G5, H4, H6       | P        | —           | Positive supply for peripheral logic and I/O pins.                                |
| VCAP/<br>VDDCORE | 56                        | 85                    | B7                                       | P        | —           | CPU logic filter capacitor connection.                                            |
| VSS              | 9, 25, 41                 | 15, 36, 45, 65, 75    | A8, B10, D4, D5, E7, F5, F10, G6, G7, H3 | P        | —           | Ground reference for logic and I/O pins. This pin must be connected at all times. |
| VREF+            | 16                        | 29                    | K3                                       | I        | Analog      | Analog voltage reference (high) input.                                            |
| VREF-            | 15                        | 28                    | L2                                       | I        | Analog      | Analog voltage reference (low) input.                                             |

**Legend:** CMOS = CMOS compatible input or output      Analog = Analog input      P = Power  
ST = Schmitt Trigger input with CMOS levels      O = Output      I = Input  
TTL = TTL input buffer

**Note 1:** Pin numbers are provided for reference only. See the “Pin Diagrams” section for device pin availability.

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 2.0 GUIDELINES FOR GETTING STARTED WITH 32-BIT MICROCONTROLLERS

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the related section of the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32))

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

### 2.1 Basic Connection Requirements

Getting started with the PIC32MX5XX/6XX/7XX family of 32-bit Microcontrollers (MCU) requires attention to a minimal set of device pin connections before proceeding with development. The following is a list of pin names, which must always be connected:

- All VDD and VSS pins  
(see **Section 2.2 “Decoupling Capacitors”**)
- All AVDD and AVSS pins—even if the ADC module is not used  
(see **Section 2.2 “Decoupling Capacitors”**)
- VCAP/VDDCORE pin  
(see **Section 2.3 “Capacitor on Internal Voltage Regulator (VCAP/VDDCORE)”**)
- MCLR pin  
(see **Section 2.4 “Master Clear (MCLR) Pin”**)
- PGECx/PGEDx pins—used for In-Circuit Serial Programming (ICSP™) and debugging purposes  
(see **Section 2.5 “ICSP Pins”**)
- OSC1 and OSC2 pins—when external oscillator source is used  
(see **Section 2.8 “External Oscillator Pins”**)

The following pin may be required, as well:

VREF+/VREF- pins—used when external voltage reference for ADC module is implemented

**Note:** The AVDD and AVSS pins must be connected, regardless of ADC use and the ADC voltage reference source.

### 2.2 Decoupling Capacitors

The use of decoupling capacitors on power supply pins, such as VDD, VSS, AVDD, and AVSS is required. See Figure 2-1.

Consider the following criteria when using decoupling capacitors:

- **Value and type of capacitor:** A value of 0.1  $\mu\text{F}$  (100 nF), 10-20V is recommended. The capacitor should be a low Equivalent Series Resistance (low-ESR) capacitor and have resonance frequency in the range of 20 MHz and higher. It is further recommended that ceramic capacitors be used.
- **Placement on the printed circuit board:** The decoupling capacitors should be placed as close to the pins as possible. It is recommended that the capacitors be placed on the same side of the board as the device. If space is constricted, the capacitor can be placed on another layer on the PCB using a via; however, ensure that the trace length from the pin to the capacitor is within one-quarter inch (6 mm) in length.
- **Handling high frequency noise:** If the board is experiencing high frequency noise, upward of tens of MHz, add a second ceramic-type capacitor in parallel to the above described decoupling capacitor. The value of the second capacitor can be in the range of 0.01  $\mu\text{F}$  to 0.001  $\mu\text{F}$ . Place this second capacitor next to the primary decoupling capacitor. In high-speed circuit designs, consider implementing a decade pair of capacitances as close to the power and ground pins as possible. For example, 0.1  $\mu\text{F}$  in parallel with 0.001  $\mu\text{F}$ .
- **Maximizing performance:** On the board layout from the power supply circuit, run the power and return traces to the decoupling capacitors first, and then to the device pins. This ensures that the decoupling capacitors are first in the power chain. Equally important is to keep the trace length between the capacitor and the power pins to a minimum thereby reducing PCB track inductance.

---

[illegible]

The use of a bulk capacitor is recommended to improve power supply stability. Typical values range from 4.7  $\mu\text{F}$  to 47  $\mu\text{F}$ . This capacitor should be located as close to the device as possible.

### 2.3.1 INTERNAL REGULATOR MODE

DS61156B-page 36

The  $\overline{\text{MCLR}}$  pin provides for two specific device functions:

- Pulling The MCLR pin low generates a device Reset. Figure 2-2 shows a typical MCLR circuit. During device programming and debugging, the resistance and capacitance that can be added to the pin must be considered. Device programmers and debuggers drive the MCLR pin. Consequently, specific voltage levels ( $V_{IH}$  and  $V_{IL}$ ) and fast signal transitions must not be adversely affected. Therefore, specific values of R and C will need to be adjusted based on the application and PCB requirements.

Place the components shown in Figure 2-2 within one-quarter inch (6 mm) from the MCLR pin.

The diagram shows the MCLR pin of a PIC32MX device. It is connected to VDD via a resistor R. It is also connected to a series combination of a resistor R1 and a capacitor C, which is then connected to ground through a jumper JP.

**Note 1:**  $R \leq 10\text{ k}\Omega$  is recommended. A suggested starting value is  $10\text{ k}\Omega$ . Ensure that the MCLR pin  $V_{IH}$  and  $V_{IL}$  specifications are met.

**2:**  $R1 \leq 470\Omega$  will limit any current flowing into MCLR from the external capacitor C, in the event of MCLR pin breakdown, due to Electrostatic Discharge (ESD) or Electrical Overstress (EOS). Ensure that the MCLR pin  $V_{IH}$  and  $V_{IL}$  specifications are met.

**3:** The capacitor can be sized to prevent unintentional Resets from brief glitches or to extend the device Reset period during POR.

## 2.5 ICSP Pins

The PGECx and PGEDx pins are used for In-Circuit Serial Programming™ (ICSP™) and debugging purposes. It is recommended to keep the trace length between the ICSP connector and the ICSP pins on the device as short as possible. If the ICSP connector is expected to experience an ESD event, a series resistor is recommended, with the value in the range of a few tens of Ohms, not to exceed 100 Ohms.

Pull-up resistors, series diodes, and capacitors on the PGECx and PGEDx pins are not recommended as they will interfere with the programmer/debugger communications to the device. If such discrete components are an application requirement, they should be removed from the circuit during programming and debugging. Alternatively, refer to the AC/DC characteristics and timing requirements information in the respective device Flash programming specification for information on capacitive loading limits and pin input voltage high ( $V_{IH}$ ) and input low ( $V_{IL}$ ) requirements.

Ensure that the “Communication Channel Select” (i.e., PGECx/PGEDx pins) programmed into the device matches the physical connections for the ICSP to MPLAB® ICD 2, MPLAB ICD 3, or MPLAB REAL ICE™.

For more information on ICD 2, ICD 3, and REAL ICE connection requirements, refer to the following documents that are available on the Microchip web site.

- “MPLAB® ICD 2 In-Circuit Debugger User's Guide” DS51331
- “Using MPLAB® ICD 2” (poster) DS51265
- “MPLAB® ICD 2 Design Advisory” DS51566
- “Using MPLAB® ICD 3” (poster) DS51765
- “MPLAB® ICD 3 Design Advisory” DS51764
- “MPLAB® REAL ICE™ In-Circuit Debugger User's Guide” DS51616
- “Using MPLAB® REAL ICE™” (poster) DS51749

## 2.6 JTAG

The TMS, TDO, TDI, and TCK pins are used for testing and debugging according to the Joint Test Action Group (JTAG) standard. It is recommended to keep the trace length between the JTAG connector and the JTAG pins on the device as short as possible. If the JTAG connector is expected to experience an ESD event, a series resistor is recommended, with the value in the range of a few tens of Ohms, not to exceed 100 Ohms.

Pull-up resistors, series diodes, and capacitors on the TMS, TDO, TDI, and TCK pins are not recommended as they will interfere with the programmer/debugger communications to the device. If such discrete components are an application requirement, they should be removed from the circuit during programming and debugging. Alternatively, refer to the AC/DC characteristics and timing requirements information in the respective device Flash programming specification for information on capacitive loading limits and pin input voltage high ( $V_{IH}$ ) and input low ( $V_{IL}$ ) requirements.

## 2.7 Trace


The trace pins can be connected to a hardware-trace-enabled programmer to provide a compress real time instruction trace. When used for trace the TRD3, TRD2, TRD1, TRD0, and TRCLK pins should be dedicated for this use. The trace hardware requires a 22 ohm series resistor between the trace pins and the trace connector.

## 2.8 External Oscillator Pins

Many MCUs have options for at least two oscillators: a high-frequency primary oscillator and a low-frequency secondary oscillator (refer to **Section 8.0 "Oscillator Configuration"** for details).

The oscillator circuit should be placed on the same side of the board as the device. Also, place the oscillator circuit close to the respective oscillator pins, not exceeding one-half inch (12 mm) distance between them. The load capacitors should be placed next to the oscillator itself, on the same side of the board. Use a grounded copper pour around the oscillator circuit to isolate them from surrounding circuits. The grounded copper pour should be routed directly to the MCU ground. Do not run any signal traces or power traces inside the ground pour. Also, if using a two-sided board, avoid any traces on the other side of the board where the crystal is placed. A suggested layout is shown in Figure 2-3.

**FIGURE 2-3: SUGGESTED OSCILLATOR CIRCUIT PLACEMENT**

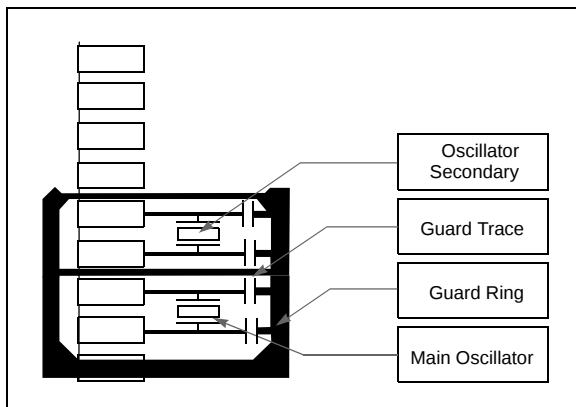

## 2.9 Configuration of Analog and Digital Pins During ICSP Operations

If MPLAB ICD 2, ICD 3, or REAL ICE is selected as a debugger, it automatically initializes all of the A/D input pins (ANx) as "digital" pins by setting all bits in the ADPCFG register.

The bits in this register that correspond to the A/D pins that are initialized by MPLAB ICD 2, ICD 3, or REAL ICE, must not be cleared by the user application firmware; otherwise, communication errors will result between the debugger and the device.

If your application needs to use certain A/D pins as analog input pins during the debug session, the user application must clear the corresponding bits in the ADPCFG register during initialization of the ADC module.

When MPLAB ICD 2, ICD 3, or REAL ICE is used as a programmer, the user application firmware must correctly configure the ADPCFG register. Automatic initialization of this register is only done during debugger operation. Failure to correctly configure the register(s) will result in all A/D pins being recognized as analog input pins, resulting in the port value being read as a logic '0', which may affect user application functionality.

## 2.10 Unused I/Os

Unused I/O pins should not be allowed to float as inputs. They can be configured as outputs and driven to a logic-low state.

Alternatively, inputs can be reserved by connecting the pin to Vss through a 1k to 10k resistor and configuring the pin as an input.

## 3.0 PIC32MX MCU

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 2. “MCU”** (DS61113) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)). Resources for the MIPS32® M4K® Processor Core are available at <http://www.mips.com>.


**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

The MCU module is the heart of the PIC32MX5XX/6XX/7XX family processor. The MCU fetches instructions, decodes each instruction, fetches source operands, executes each instruction and writes the results of instruction execution to the proper destinations.

### 3.1 Features

- 5-stage pipeline
- 32-bit Address and Data Paths
- MIPS32 Enhanced Architecture (Release 2)
  - Multiply-Accumulate and Multiply-Subtract Instructions
  - Targeted Multiply Instruction
  - Zero/One Detect Instructions
  - WAIT Instruction
  - Conditional Move Instructions (MOVN, MOVZ)
  - Vectored interrupts
  - Programmable exception vector base
- Atomic interrupt enable/disable
- GPR shadow registers to minimize latency for interrupt handlers
- Bit field manipulation instructions
- MIPS16e™ Code Compression
  - 16-bit encoding of 32-bit instructions to improve code density
  - Special PC-relative instructions for efficient loading of addresses and constants
  - SAVE & RESTORE macro instructions for setting up and tearing down stack frames within subroutines
  - Improved support for handling 8 and 16-bit data types
- Simple Fixed Mapping Translation (FMT) mechanism
- Simple Dual Bus Interface
  - Independent 32-bit address and data busses
  - Transactions can be aborted to improve interrupt latency
- Autonomous Multiply/Divide Unit
  - Maximum issue rate of one 32x16 multiply per clock
  - Maximum issue rate of one 32x32 multiply every other clock
  - Early-in iterative divide. Minimum 11 and maximum 33 clock latency (dividend (rs) sign extension-dependent)
- Power Control
  - Minimum frequency: 0 MHz
  - Low-Power mode (triggered by WAIT instruction)
  - Extensive use of local gated clocks
- EJTAG Debug and Instruction Trace
  - Support for single stepping
  - Virtual instruction and data address/value
  - Breakpoints
  - PC tracing with trace compression

**FIGURE 3-1: MCU BLOCK DIAGRAM**

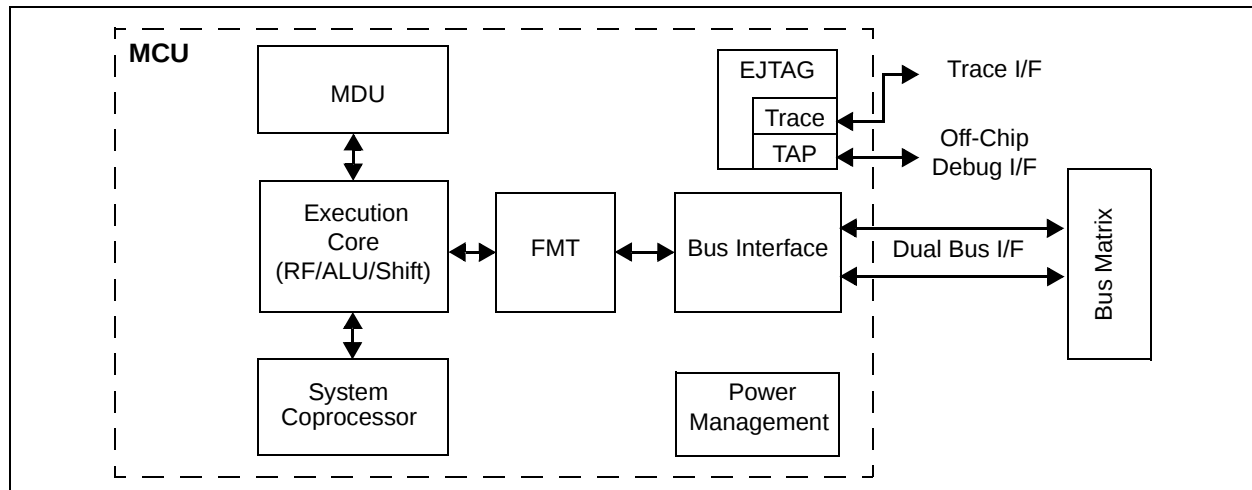

## 3.2 Architecture Overview

The PIC32MX5XX/6XX/7XX family core contains several logic blocks working together in parallel, providing an efficient high performance computing engine. The following blocks are included with the core:

- Execution Unit
- Multiply/Divide Unit (MDU)
- System Control Co-processor (CPO)
- Fixed Mapping Translation (FMT)
- Dual Internal Bus interfaces
- Power Management
- MIPS16e Support
- Enhanced JTAG (EJTAG) Controller

### 3.2.1 EXECUTION UNIT

The PIC32MX5XX/6XX/7XX family core execution unit implements a load/store architecture with single-cycle ALU operations (logical, shift, add, subtract) and an autonomous multiply/divide unit. The core contains thirty-two 32-bit General Purpose Registers (GPRs) used for integer operations and address calculation. One additional register file shadow set (containing thirty-two registers) is added to minimize context switching overhead during interrupt/exception processing. The register file consists of two read ports and one write port and is fully bypassed to minimize operation latency in the pipeline.

The execution unit includes:

- 32-bit adder used for calculating the data address
- Address unit for calculating the next instruction address
- Logic for branch determination and branch target address calculation
- Load aligner
- Bypass multiplexers used to avoid stalls when executing instructions streams where data producing instructions are followed closely by consumers of their results
- Leading Zero/One detect unit for implementing the CLZ and CLO instructions
- Arithmetic Logic Unit (ALU) for performing bitwise logical operations
- Shifter and Store Aligner

### 3.2.2 MULTIPLY/DIVIDE UNIT (MDU)

The PIC32MX5XX/6XX/7XX family core includes a multiply/divide unit (MDU) that contains a separate pipeline for multiply and divide operations. This pipeline operates in parallel with the integer unit (IU) pipeline and does not stall when the IU pipeline stalls. This allows MDU operations to be partially masked by system stalls and/or other integer unit instructions.

The high-performance MDU consists of a 32x16 booth recoded multiplier, result/accumulation registers (HI and LO), a divide state machine, and the necessary multiplexers and control logic. The first number shown ('32' of 32x16) represents the *rs* operand. The second number ('16' of 32x16) represents the *rt* operand. The PIC32MX core only checks the value of the latter (*rt*) operand to determine how many times the operation must pass through the multiplier. The 16x16 and 32x16 operations pass through the multiplier once. A 32x32 operation passes through the multiplier twice.

The MDU supports execution of one 16x16 or 32x16 multiply operation every clock cycle; 32x32 multiply operations can be issued every other clock cycle. Appropriate interlocks are implemented to stall the issuance of back-to-back 32x32 multiply operations. The multiply operand size is automatically determined by logic built into the MDU.

Divide operations are implemented with a simple 1 bit per clock iterative algorithm. An early-in detection checks the sign extension of the dividend (*rs*) operand. If *rs* is 8 bits wide, 23 iterations are skipped. For a 16-bit-wide *rs*, 15 iterations are skipped, and for a 24-bit-wide *rs*, 7 iterations are skipped. Any attempt to issue a subsequent MDU instruction while a divide is still active causes an IU pipeline stall until the divide operation is completed.

Table 3-1 lists the repeat rate (peak issue rate of cycles until the operation can be reissued) and latency (number of cycles until a result is available) for the PIC32MX core multiply and divide instructions. The approximate latency and repeat rates are listed in terms of pipeline clocks.

**TABLE 3-1: PIC32MX5XX/6XX/7XX FAMILY CORE HIGH-PERFORMANCE INTEGER MULTIPLY/DIVIDE UNIT LATENCIES AND REPEAT RATES**

| Opcode                             | Operand Size (mul <i>rt</i> ) (div <i>rs</i> ) | Latency | Repeat Rate |
|------------------------------------|------------------------------------------------|---------|-------------|
| MULT/MULTU, MADD/MADDU, MSUB/MSUBU | 16 bits                                        | 1       | 1           |
|                                    | 32 bits                                        | 2       | 2           |
| MUL                                | 16 bits                                        | 2       | 1           |
|                                    | 32 bits                                        | 3       | 2           |
| DIV/DIVU                           | 8 bits                                         | 12      | 11          |
|                                    | 16 bits                                        | 19      | 18          |
|                                    | 24 bits                                        | 26      | 25          |
|                                    | 32 bits                                        | 33      | 32          |

The MIPS architecture defines that the result of a multiply or divide operation be placed in the HI and LO registers. Using the Move-From-HI (MFHI) and Move-From-LO (MFLO) instructions, these values can be transferred to the General Purpose Register file.

In addition to the HI/LO targeted operations, the MIPS32 architecture also defines a multiply instruction, MUL, which places the least significant results in the primary register file instead of the HI/LO register pair. By avoiding the explicit MFLO instruction, required when using the LO register, and by supporting multiple destination registers, the throughput of multiply-intensive operations is increased.

Two other instructions, multiply-add (MADD) and multiply-subtract (MSUB), are used to perform the multiply-accumulate and multiply-subtract operations. The MADD instruction multiplies two numbers and then adds the product to the current contents of the HI and LO registers. Similarly, the MSUB instruction multiplies two operands and then subtracts the product from the HI and LO registers. The MADD and MSUB operations are commonly used in DSP algorithms.

### 3.2.3 SYSTEM CONTROL CO-PROCESSOR (CP0)

In the MIPS architecture, CP0 is responsible for the virtual-to-physical address translation, the exception control system, the processor's diagnostics capability, the operating modes (Kernel, User, and Debug), and whether interrupts are enabled or disabled. Configuration information, such as presence of options like MIPS16e, is also available by accessing the CP0 registers, listed in Table 3-2.

# PIC32MX5XX/6XX/7XX

TABLE 3-2: CO-PROCESSOR 0 REGISTERS

| Register Number | Register Name           | Function                                                                 |
|-----------------|-------------------------|--------------------------------------------------------------------------|
| 0-6             | Reserved                | Reserved in the PIC32MX5XX/6XX/7XX family core.                          |
| 7               | HWREna                  | Enables access via the RDHWR instruction to selected hardware registers. |
| 8               | BadVAddr <sup>(1)</sup> | Reports the address for the most recent address-related exception.       |
| 9               | Count <sup>(1)</sup>    | Processor cycle count.                                                   |
| 10              | Reserved                | Reserved in the PIC32MX5XX/6XX/7XX family core.                          |
| 11              | Compare <sup>(1)</sup>  | Timer interrupt control.                                                 |
| 12              | Status <sup>(1)</sup>   | Processor status and control.                                            |
| 12              | IntCtl <sup>(1)</sup>   | Interrupt system status and control.                                     |
| 12              | SRSCtl <sup>(1)</sup>   | Shadow register set status and control.                                  |
| 12              | SRSMap <sup>(1)</sup>   | Provides mapping from vectored interrupt to a shadow set.                |
| 13              | Cause <sup>(1)</sup>    | Cause of last general exception.                                         |
| 14              | EPC <sup>(1)</sup>      | Program counter at last exception.                                       |
| 15              | PRId                    | Processor identification and revision.                                   |
| 15              | EBASE                   | Exception vector base register.                                          |
| 16              | Config                  | Configuration register.                                                  |
| 16              | Config1                 | Configuration register 1.                                                |
| 16              | Config2                 | Configuration register 2.                                                |
| 16              | Config3                 | Configuration register 3.                                                |
| 17-22           | Reserved                | Reserved in the PIC32MX5XX/6XX/7XX family core.                          |
| 23              | Debug <sup>(2)</sup>    | Debug control and exception status.                                      |
| 24              | DEPC <sup>(2)</sup>     | Program counter at last debug exception.                                 |
| 25-29           | Reserved                | Reserved in the PIC32MX5XX/6XX/7XX family core.                          |
| 30              | ErrorEPC <sup>(1)</sup> | Program counter at last error.                                           |
| 31              | DESAVE <sup>(2)</sup>   | Debug handler scratchpad register.                                       |

**Note 1:** Registers used in exception processing.

**Note 2:** Registers used during debug.

Co-processor 0 also contains the logic for identifying and managing exceptions. Exceptions can be caused by a variety of sources, including alignment errors in data, external events, or program errors. Table 3-3 lists the exception types in order of priority.

**TABLE 3-3: PIC32MX5XX/6XX/7XX FAMILY CORE EXCEPTION TYPES**

| Exception | Description                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Reset     | Assertion <u>MCLR</u> or a Power-on Reset (POR).                                                                                                |
| DSS       | EJTAG Debug Single Step.                                                                                                                        |
| DINT      | EJTAG Debug Interrupt. Caused by the assertion of the external <i>EJ_DINT</i> input, or by setting the <i>EjtagBrk</i> bit in the ECR register. |
| NMI       | Assertion of NMI signal.                                                                                                                        |
| Interrupt | Assertion of unmasked hardware or software interrupt signal.                                                                                    |
| DIB       | EJTAG debug hardware instruction break matched.                                                                                                 |
| AdEL      | Fetch address alignment error.<br>Fetch reference to protected address.                                                                         |
| IBE       | Instruction fetch bus error.                                                                                                                    |
| DBp       | EJTAG Breakpoint (execution of SDBBP instruction).                                                                                              |
| Sys       | Execution of SYSCALL instruction.                                                                                                               |
| Bp        | Execution of BREAK instruction.                                                                                                                 |
| RI        | Execution of a Reserved Instruction.                                                                                                            |
| CpU       | Execution of a co-processor instruction for a co-processor that is not enabled.                                                                 |
| CEU       | Execution of a CorExtend instruction when CorExtend is not enabled.                                                                             |
| Ov        | Execution of an arithmetic instruction that overflowed.                                                                                         |
| Tr        | Execution of a trap (when trap condition is true).                                                                                              |
| DDBL/DDBS | EJTAG Data Address Break (address only) or EJTAG Data Value Break on Store (address + value).                                                   |
| AdEL      | Load address alignment error<br>Load reference to protected address.                                                                            |
| AdES      | Store address alignment error.<br>Store to protected address.                                                                                   |
| DBE       | Load or store bus error.                                                                                                                        |
| DDBL      | EJTAG data hardware breakpoint matched in load data compare.                                                                                    |

## 3.3 Power Management

The PIC32MX5XX/6XX/7XX family core offers a number of power management features, including low-power design, active power management, and power-down modes of operation. The core is a static design that supports slowing or halting the clocks, which reduces system power consumption during idle periods.

### 3.3.1 INSTRUCTION-CONTROLLED POWER MANAGEMENT

The mechanism for invoking Power-Down mode is through execution of the WAIT instruction. For more information on power management, see **Section 27.0 “Power-Saving Features”**.

### 3.3.2 LOCAL CLOCK GATING

The majority of the power consumed by the PIC32MX5XX/6XX/7XX family core is in the clock tree and clocking registers. The PIC32MX family uses extensive use of local gated-clocks to reduce this dynamic power consumption.

## 3.4 EJTAG Debug Support

The PIC32MX5XX/6XX/7XX family core provides for an Enhanced JTAG (EJTAG) interface for use in the software debug of application and kernel code. In addition to standard User mode and Kernel modes of operation, the PIC32MX5XX/6XX/7XX family core provides a Debug mode that is entered after a debug exception (derived from a hardware breakpoint, single-step exception, etc.) is taken and continues until a Debug Exception Return (DERET) instruction is executed. During this time, the processor executes the debug exception handler routine.

The EJTAG interface operates through the Test Access Port (TAP), a serial communication port used for transferring test data in and out of the PIC32MX5XX/6XX/7XX family core. In addition to the standard JTAG instructions, special instructions defined in the EJTAG specification define which registers are selected and how they are used.

## 4.0 MEMORY ORGANIZATION

**Note:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. For detailed information, refer to **Section 3. “Memory Organization”** (DS61115) in the *“PIC32MX Family Reference Manual”*, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

PIC32MX5XX/6XX/7XX microcontrollers provide 4 GB of unified virtual memory address space. All memory regions, including program, data memory, SFRs, and Configuration registers, reside in this address space at their respective unique addresses. The program and data memories can be optionally partitioned into user and kernel memories. In addition, the data memory can be made executable, allowing PIC32MX5XX/6XX/7XX devices to execute from data memory.

Key features include:

- 32-bit native data width
- Separate User (KUSEG) and Kernel (KSEG0/KSEG1) mode address space
- Flexible program Flash memory partitioning
- Flexible data RAM partitioning for data and program space
- Separate boot Flash memory for protected code
- Robust bus exception handling to intercept runaway code
- Simple memory mapping with Fixed Mapping Translation (FMT) unit
- Cacheable (KSEG0) and non-cacheable (KSEG1) address regions

## 4.1 PIC32MX5XX/6XX/7XX Memory Layout

PIC32MX5XX/6XX/7XX microcontrollers implement two address schemes: virtual and physical. All hardware resources such as program memory, data memory and peripherals are located at their respective physical addresses. Virtual addresses are exclusively used by the CPU to fetch and execute instructions as well as access peripherals. Physical addresses are used by bus master peripherals such as DMA and Flash controller that access memory independently of CPU.


The memory maps for the PIC32MX5XX/6XX/7XX devices are shown in Figure 4-1, Figure 4-2, and Figure 4-3.

### 4.1.1 PERIPHERAL REGISTERS LOCATIONS


Table 4-1 through Table 4-44 contain the peripheral address maps for the PIC32MX5XX/6XX/7XX devices. Peripherals located on the PB Bus are mapped to 512 byte boundaries. Peripherals on the FPB Bus are mapped to 4 Kbyte boundaries.

# PIC32MX5XX/6XX/7XX

**FIGURE 4-1: MEMORY MAP ON RESET FOR PIC32MX575F256H AND PIC32MX575F256L DEVICES<sup>(1)</sup>**

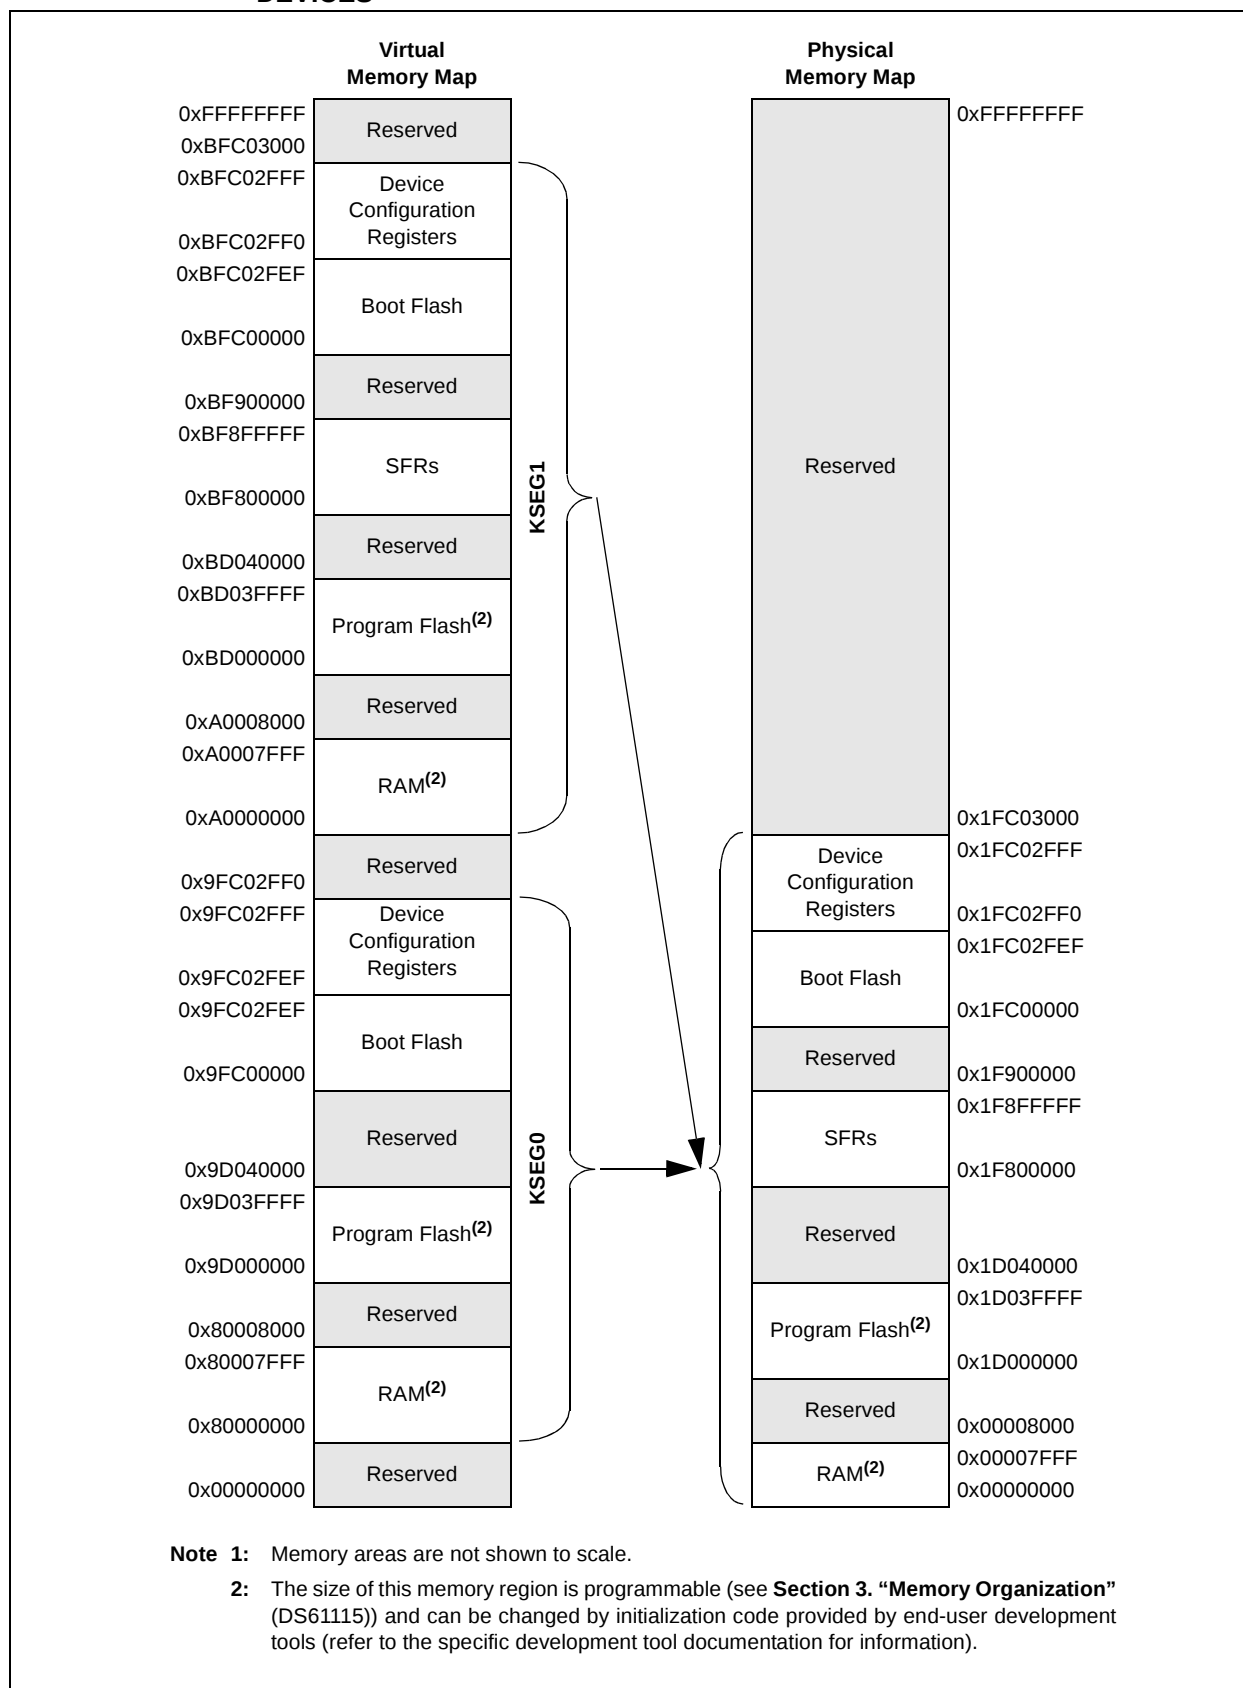


**FIGURE 4-2: MEMORY MAP ON RESET FOR PIC32MX575F512H, PIC32MX575F512L, PIC32MX675F512H, AND PIC32MX675F512L DEVICES**

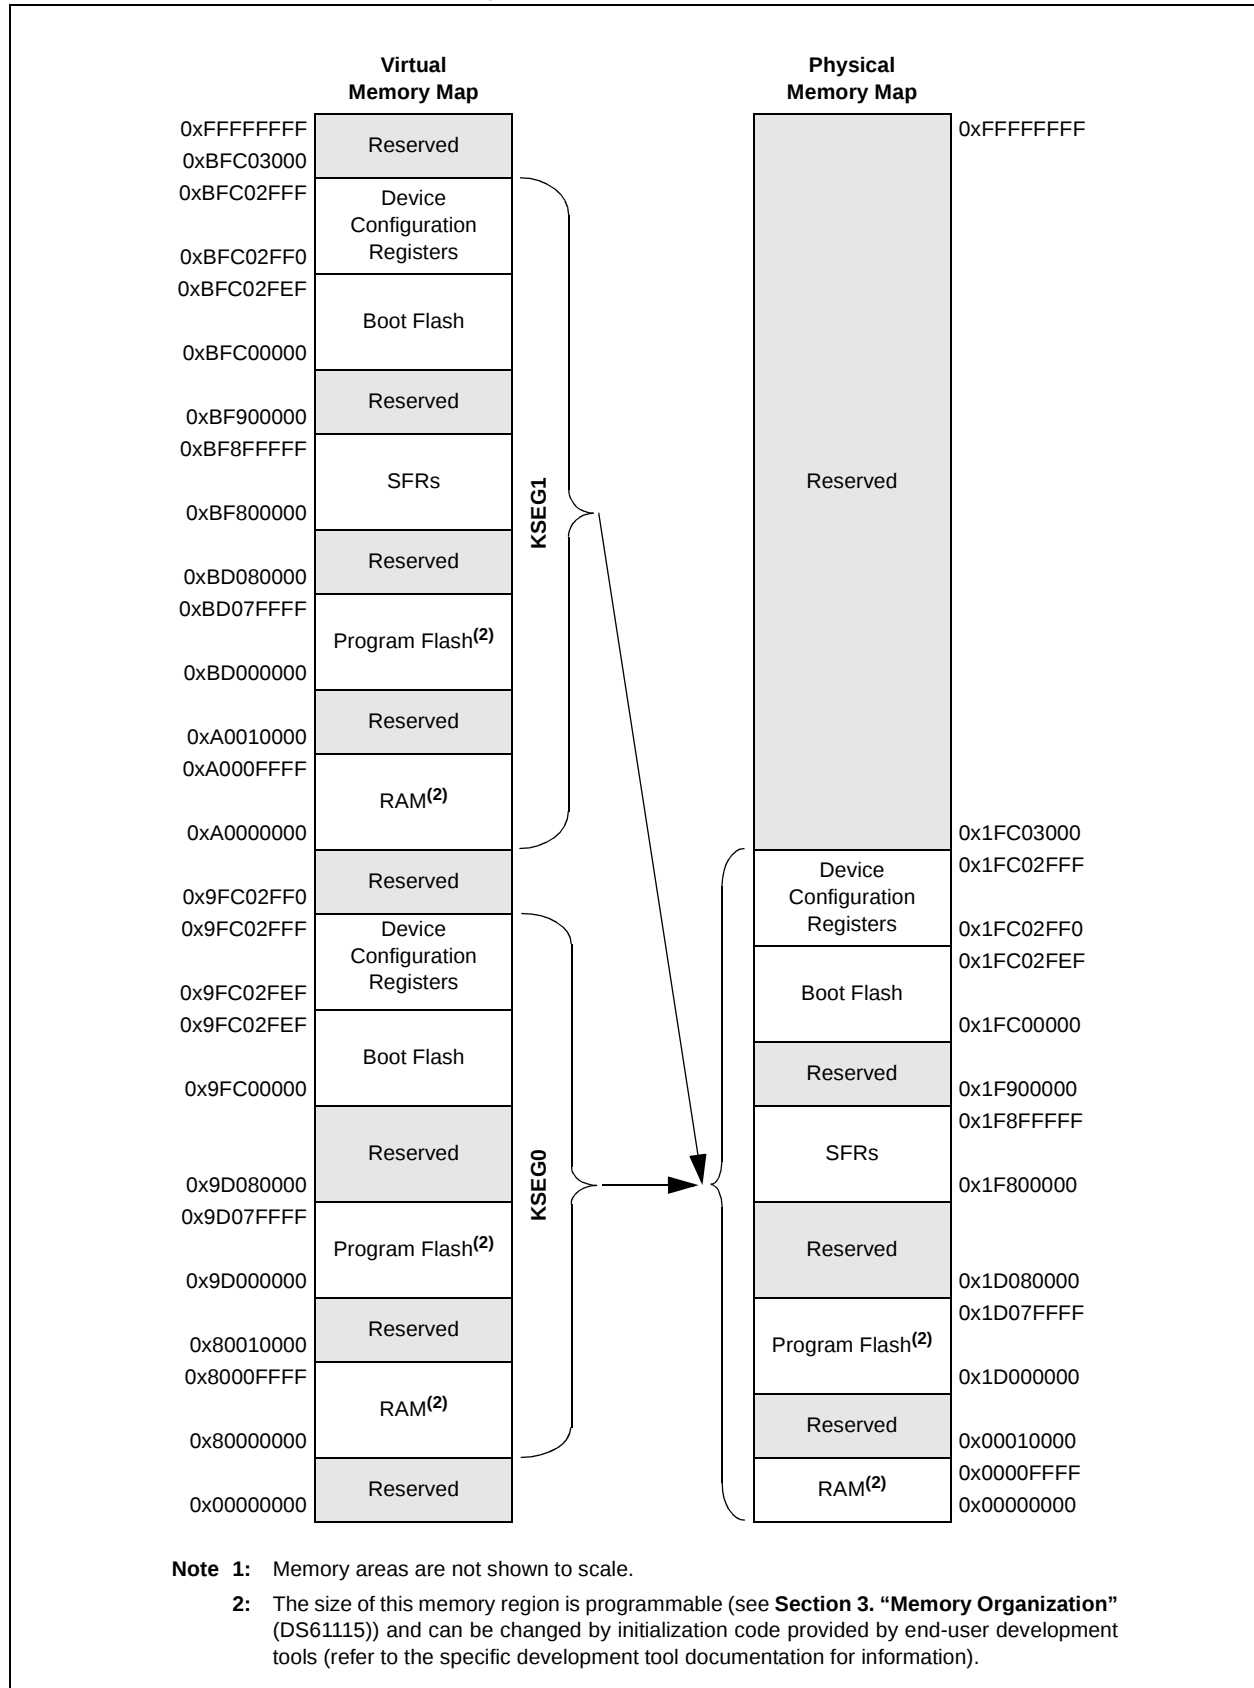

# PIC32MX5XX/6XX/7XX

**FIGURE 4-3: MEMORY MAP ON RESET FOR PIC32MX695F512H, PIC32MX695F512L, PIC32MX795F512H, AND PIC32MX795F512L DEVICES**

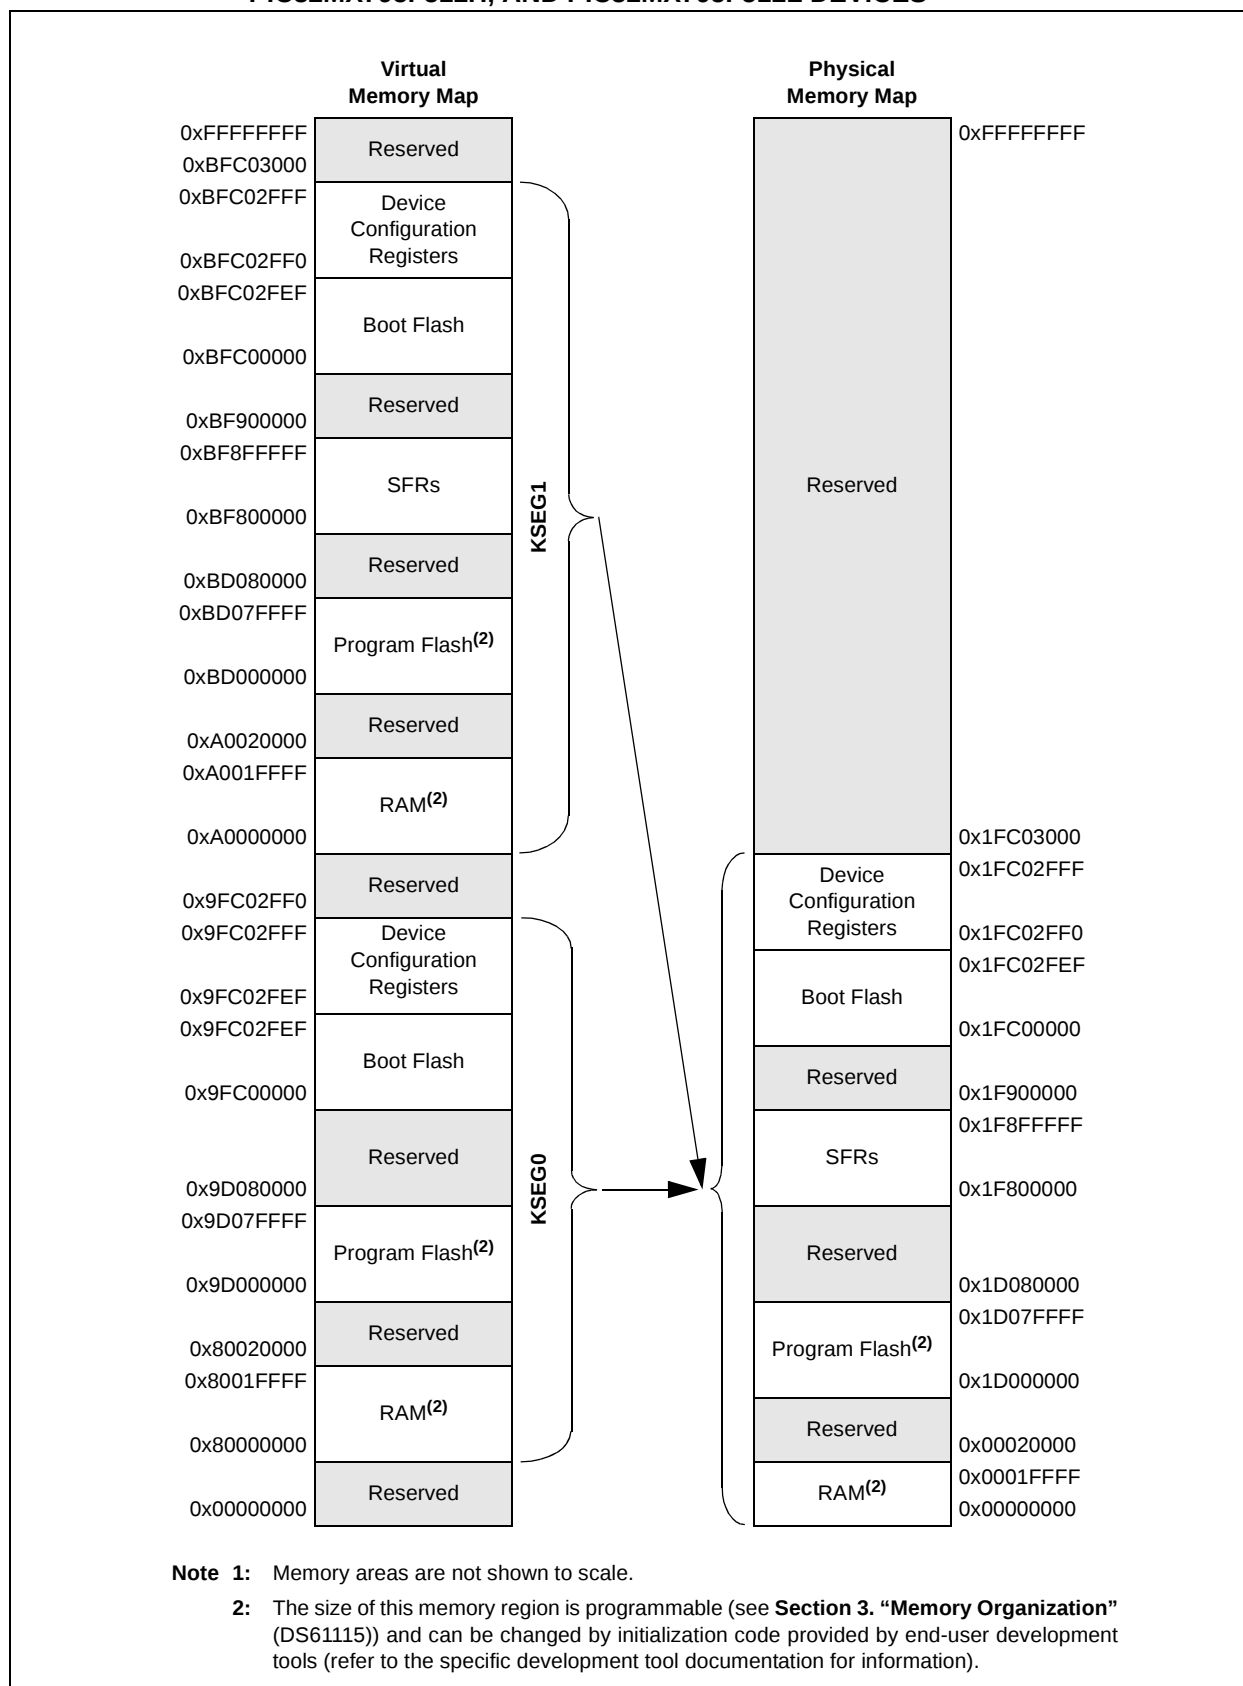

**TABLE 4-1: BUS MATRIX REGISTER MAP**

| Virtual Address<br>(BF88_#) | Register<br>Name        | Bit Range | Bits            |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | All<br>Resets |
|-----------------------------|-------------------------|-----------|-----------------|-------|-------|-------|-------|-----------|------|------|------|----------|------|-----------------|-----------|-------------|----------|----------|---------------|
|                             |                         |           | 31/15           | 30/14 | 29/13 | 28/12 | 27/11 | 26/10     | 25/9 | 24/8 | 23/7 | 22/6     | 21/5 | 20/4            | 19/3      | 18/2        | 17/1     | 16/0     |               |
| 2000                        | BMXCON <sup>(1)</sup>   | 31:16     | —               | —     | —     | —     | —     | BMXCHEDMA | —    | —    | —    | —        | —    | BMXERRIXI       | BMXERRICD | BMXERRDMA   | BMXERRDS | BMXERRIS | 001F          |
|                             |                         | 15:0      | —               | —     | —     | —     | —     | —         | —    | —    | —    | BMXWSDRM | —    | —               | —         | BMXARB<2:0> |          |          | 0040          |
| 2010                        | BMXDKPBA <sup>(1)</sup> | 31:16     | —               | —     | —     | —     | —     | —         | —    | —    | —    | —        | —    | —               | —         | —           | —        | —        | 0000          |
|                             |                         | 15:0      | BMXDKPBA<15:0>  |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | 0000          |
| 2020                        | BMXDUDBA <sup>(1)</sup> | 31:16     | —               | —     | —     | —     | —     | —         | —    | —    | —    | —        | —    | —               | —         | —           | —        | —        | 0000          |
|                             |                         | 15:0      | BMXDUDBA<15:0>  |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | 0000          |
| 2030                        | BMXDUPBA <sup>(1)</sup> | 31:16     | —               | —     | —     | —     | —     | —         | —    | —    | —    | —        | —    | —               | —         | —           | —        | —        | 0000          |
|                             |                         | 15:0      | BMXDUPBA<15:0>  |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | 0000          |
| 2040                        | BMXDRMSZ                | 31:16     | BMXDRMSZ<31:0>  |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | xxxx          |
|                             |                         | 15:0      | BMXDRMSZ<31:0>  |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | xxxx          |
| 2050                        | BMXPUPBA <sup>(1)</sup> | 31:16     | —               | —     | —     | —     | —     | —         | —    | —    | —    | —        | —    | BMXPUPBA<19:16> |           |             |          |          | 0000          |
|                             |                         | 15:0      | BMXPUPBA<15:0>  |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | 0000          |
| 2060                        | BMXPFMSZ                | 31:16     | BMXPFMSZ<31:0>  |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | xxxx          |
|                             |                         | 15:0      | BMXPFMSZ<31:0>  |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | xxxx          |
| 2070                        | BMXBOOTSZ               | 31:16     | BMXBOOTSZ<31:0> |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | 0000          |
|                             |                         | 15:0      | BMXBOOTSZ<31:0> |       |       |       |       |           |      |      |      |          |      |                 |           |             |          |          | 3000          |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** This register has corresponding CLR, SET, and INV Registers at its virtual address, plus an offset of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-2: INTERRUPT REGISTER MAP FOR THE PIC32MX575F256H AND PIC32MX575F512H DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register Name | Bit Range | Bits        |         |         |             |           |           |             |          |           |           |          |         |            |        |        |            | All Resets |      |
|-----------------------------|---------------|-----------|-------------|---------|---------|-------------|-----------|-----------|-------------|----------|-----------|-----------|----------|---------|------------|--------|--------|------------|------------|------|
|                             |               |           | 31/15       | 30/14   | 29/13   | 28/12       | 27/11     | 26/10     | 25/9        | 24/8     | 23/7      | 22/6      | 21/5     | 20/4    | 19/3       | 18/2   | 17/1   | 16/0       |            |      |
| 1000                        | INTCON        | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —         | —         | —        | —       | —          | —      | —      | SS0        | 0000       |      |
|                             |               | 15:0      | —           | FRZ     | —       | MVEC        | —         | TRC<2:0>  |             |          | —         | —         | —        | INT4EP  | INT3EP     | INT2EP | INT1EP | INT0EP     | 0000       |      |
| 1010                        | INT-STAT      | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —         | —         | —        | —       | —          | —      | —      | —          | 0000       |      |
|                             |               | 15:0      | —           | —       | —       | —           | —         | RIPL<2:0> |             |          | —         | —         | VEC<5:0> |         |            |        |        |            | 0000       |      |
| 1020                        | IPTMR         | 31:16     | IPTMR<31:0> |         |         |             |           |           |             |          |           |           |          |         |            |        |        |            | 0000       |      |
|                             |               | 15:0      |             |         |         |             |           |           |             |          |           |           |          |         |            |        |        |            | 0000       |      |
| 1030                        | IFS0          | 31:16     | I2C1MIF     | I2CSIF  | I2CBIF  | U1ATXIF     | U1ARXIF   | U1AEIF    | —           | —        | —         | OC5IF     | IC5IF    | T5IF    | INT4IF     | OC4IF  | IC4IF  | T4IF       | 0000       |      |
|                             |               |           |             |         |         | SPI1ATXIF   | SPI1ARXIF | SPI1AEIF  |             |          |           |           |          |         |            |        |        |            |            |      |
|                             |               |           |             |         |         | I2C1AMIF    | I2C1ASIF  | I2C1ABIF  |             |          |           |           |          |         |            |        |        |            |            |      |
|                             |               | 15:0      | INT3IF      | OC3IF   | IC3IF   | T3IF        | INT2IF    | OC2IF     | IC2IF       | T2IF     | INT1IF    | OC1IF     | IC1IF    | T1IF    | INT0IF     | CS1IF  | CS0IF  | CTIF       | 0000       |      |
| 1040                        | IFS1          | 31:16     | IC3EIF      | IC2EIF  | IC1EIF  | —           | —         | CAN1IF    | USBIF       | FCEIF    | DMA7IF    | DMA6IF    | DMA5IF   | DMA4IF  | DMA3IF     | DMA2IF | DMA1IF | DMA0IF     | 0000       |      |
|                             |               | 15:0      | RTCCIF      | FSCMIF  | —       | —           | —         | U3ATXIF   | U3ARXIF     | U3AEIF   | U2ATXIF   | U2ARXIF   | U2AEIF   | CMP2IF  | CMP1IF     | PMPIF  | AD1IF  | CNIF       | 0000       |      |
|                             |               |           |             |         |         |             |           | SPI3ATXIF | SPI3ARXIF   | SPI3AEIF | SPI2ATXIF | SPI2ARXIF | SPI2AEIF |         |            |        |        |            |            |      |
|                             |               |           |             |         |         |             |           | I2C3AMIF  | I2C3ASIF    | I2C3ASIF | I2C2AMIF  | I2C2ASIF  | I2C2ABIF |         |            |        |        |            |            |      |
| 1050                        | IFS2          | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —         | —         | —        | —       | —          | —      | —      | —          | 0000       |      |
|                             |               | 15:0      | —           | —       | —       | —           | —         | U3BTXIF   | U3BRXIF     | U3BEIF   | U2BTXIF   | U2BRXIF   | U2BEIF   | U1BTXIF | U1BRXIF    | U1BEIF | PMPEIF | IC5EIF     | IC4EIF     | 0000 |
| 1060                        | IEC0          | 31:16     | I2C1MIE     | I2C1SIE | I2C1BIE | U1ATXIE     | U1ARXIE   | U1AEIE    | —           | —        | —         | OC5IE     | IC5IE    | T5IE    | INT4IE     | OC4IE  | IC4IE  | T4IE       | 0000       |      |
|                             |               |           |             |         |         | SPI1ATXIE   | SPI1ARXIE | SPI1AEIE  |             |          |           |           |          |         |            |        |        |            |            |      |
|                             |               |           |             |         |         | I2C1AMIE    | I2C1ASIE  | I2C1ABIE  |             |          |           |           |          |         |            |        |        |            |            |      |
|                             |               | 15:0      | INT3IE      | OC3IE   | IC3IE   | T3IE        | INT2IE    | OC2IE     | IC2IE       | T2IE     | INT1IE    | OC1IE     | IC1IE    | T1IE    | INT0IE     | CS1IE  | CS0IE  | CTIE       | 0000       |      |
| 1070                        | IEC1          | 31:16     | IC3EIE      | IC2EIE  | IC1EIE  | —           | —         | CAN1IE    | USBIE       | FCEIE    | DMA7IE    | DMA6IE    | DMA5IE   | DMA4IE  | DMA3IE     | DMA2IE | DMA1IE | DMA0IE     | 0000       |      |
|                             |               | 15:0      | RTCCIE      | FSCMIE  | —       | —           | —         | U3ATXIE   | U3ARXIE     | U3AEIE   | U2ATXIE   | U2ARXIE   | U2AEIE   | CMP2IE  | CMP1IE     | PMPIE  | AD1IE  | CNIE       | 0000       |      |
|                             |               |           |             |         |         |             |           | SPI3ATXIE | SPI3ARXIE   | SPI3AEIE | SPI2ATXIE | SPI2ARXIE | SPI2AEIE |         |            |        |        |            |            |      |
|                             |               |           |             |         |         |             |           | I2C3AMIE  | I2C3ASIE    | I2C3ASIE | I2C2AMIE  | I2C2ASIE  | I2C2ABIE |         |            |        |        |            |            |      |
| 1080                        | IEC2          | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —         | —         | —        | —       | —          | —      | —      | —          | 0000       |      |
|                             |               | 15:0      | —           | —       | —       | —           | —         | U3BTXIE   | U3BRXIE     | U3BEIE   | U2BTXIE   | U2BRXIE   | U2BEIE   | U1BTXIE | U1BRXIE    | U1BEIE | PMPEIE | IC5EIE     | IC4EIE     | 0000 |
| 1090                        | IPC0          | 31:16     | —           | —       | —       | INT0IP<2:0> |           |           | INT0IS<1:0> |          |           | —         | —        | —       | CS1IP<2:0> |        |        | CS1IS<1:0> |            | 0000 |
|                             |               | 15:0      | —           | —       | —       | CS0IP<2:0>  |           |           | CS0IS<1:0>  |          |           | —         | —        | —       | CTIP<2:0>  |        |        | CTIS<1:0>  |            | 0000 |
| 10A0                        | IPC1          | 31:16     | —           | —       | —       | INT1IP<2:0> |           |           | INT1IS<1:0> |          |           | —         | —        | —       | OC1IP<2:0> |        |        | OC1IS<1:0> |            | 0000 |
|                             |               | 15:0      | —           | —       | —       | IC1IP<2:0>  |           |           | IC1IS<1:0>  |          |           | —         | —        | —       | T1IP<2:0>  |        |        | T1IS<1:0>  |            | 0000 |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-2: INTERRUPT REGISTER MAP FOR THE PIC32MX575F256H AND PIC32MX575F512H DEVICES<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88.#) | Register<br>Name | Bit Range | Bits  |       |              |              |       |              |              |      |      |      |              |              |            |              |              | All<br>Resets |      |      |
|-----------------------------|------------------|-----------|-------|-------|--------------|--------------|-------|--------------|--------------|------|------|------|--------------|--------------|------------|--------------|--------------|---------------|------|------|
|                             |                  |           | 31/15 | 30/14 | 29/13        | 28/12        | 27/11 | 26/10        | 25/9         | 24/8 | 23/7 | 22/6 | 21/5         | 20/4         | 19/3       | 18/2         | 17/1         |               | 16/0 |      |
| 10B0                        | IPC2             | 31:16     | —     | —     | —            | INT2IP<2:0>  |       |              | INT2IS<1:0>  |      | —    | —    | —            | OC2IP<2:0>   |            |              | OC2IS<1:0>   |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | —            | IC2IP<2:0>   |       |              | IC2IS<1:0>   |      | —    | —    | —            | T2IP<2:0>    |            |              | T2IS<1:0>    |               | 0000 |      |
| 10C0                        | IPC3             | 31:16     | —     | —     | —            | INT3IP<2:0>  |       |              | INT3IS<1:0>  |      | —    | —    | —            | OC3IP<2:0>   |            |              | OC3IS<1:0>   |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | —            | IC3IP<2:0>   |       |              | IC3IS<1:0>   |      | —    | —    | —            | T3IP<2:0>    |            |              | T3IS<1:0>    |               | 0000 |      |
| 10D0                        | IPC4             | 31:16     | —     | —     | —            | INT4IP<2:0>  |       |              | INT4IS<1:0>  |      | —    | —    | —            | OC4IP<2:0>   |            |              | OC4IS<1:0>   |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | —            | IC4IP<2:0>   |       |              | IC4IS<1:0>   |      | —    | —    | —            | T4IP<2:0>    |            |              | T4IS<1:0>    |               | 0000 |      |
| 10E0                        | IPC5             | 31:16     | —     | —     | —            | —            | —     | —            | —            | —    | —    | —    | —            | OC5IP<2:0>   |            |              | OC5IS<1:0>   |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | —            | IC5IP<2:0>   |       |              | IC5IS<1:0>   |      | —    | —    | —            | T5IP<2:0>    |            |              | T5IS<1:0>    |               | 0000 |      |
| 10F0                        | IPC6             | 31:16     | —     | —     | —            | AD1IP<2:0>   |       |              | AD1IS<1:0>   |      | —    | —    | —            | CNIP<2:0>    |            |              | CNIS<1:0>    |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | I2C1IP<2:0>  |              |       | I2C1IS<1:0>  |              |      | —    | —    | —            | U1AIP<2:0>   |            |              | U1AIS<1:0>   |               | 0000 |      |
|                             |                  |           |       |       |              |              |       |              |              |      |      |      |              | SPI1AIP<2:0> |            |              | SPI1AIS<1:0> |               |      |      |
|                             |                  |           |       |       |              |              |       |              |              |      |      |      |              | I2C1AIP<2:0> |            |              | I2C1AIS<1:0> |               |      |      |
| 1100                        | IPC7             | 31:16     | —     | —     | U2AIP<2:0>   |              |       | U2AIS<1:0>   |              |      | —    | —    | —            | CMP2IP<2:0>  |            |              | CMP2IS<1:0>  |               | 0000 |      |
|                             |                  |           |       |       | SPI2AIP<2:0> |              |       | SPI2AIS<1:0> |              |      |      |      |              |              |            |              |              |               |      |      |
|                             |                  |           |       |       | I2C2AIP<2:0> |              |       | I2C2AIS<1:0> |              |      |      |      |              |              |            |              |              |               |      |      |
|                             |                  | 15:0      | —     | —     | —            | CMP1IP<2:0>  |       |              | CMP1IS<1:0>  |      |      | —    | —            | —            | PMPIP<2:0> |              |              | PMPIS<1:0>    |      | 0000 |
| 1110                        | IPC8             | 31:16     | —     | —     | —            | RTCCIP<2:0>  |       |              | RTCCIS<1:0>  |      | —    | —    | —            | FSCMIP<2:0>  |            |              | FSCMIS<1:0>  |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | —            | —            | —     | —            | —            | —    | —    | —    | U3AIP<2:0>   |              |            | U3AIS<1:0>   |              | 0000          |      |      |
|                             |                  |           |       |       |              |              |       |              |              |      |      |      | SPI3AIP<2:0> |              |            | SPI3AIS<1:0> |              |               |      |      |
|                             |                  | 15:0      | —     | —     | —            | I2C3AIP<2:0> |       |              | I2C3AIS<1:0> |      |      |      |              |              |            |              |              |               |      |      |
| 1120                        | IPC9             | 31:16     | —     | —     | —            | DMA3IP<2:0>  |       |              | DMA3IS<1:0>  |      | —    | —    | —            | DMA2IP<2:0>  |            |              | DMA2IS<1:0>  |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | —            | DMA1IP<2:0>  |       |              | DMA1IS<1:0>  |      | —    | —    | —            | DMA0IP<2:0>  |            |              | DMA0IS<1:0>  |               | 0000 |      |
| 1130                        | IPC10            | 31:16     | —     | —     | —            | DMA7IP<2:0>  |       |              | DMA7IS<1:0>  |      | —    | —    | —            | DMA6IP<2:0>  |            |              | DMA6IS<1:0>  |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | —            | DMA5IP<2:0>  |       |              | DMA5IS<1:0>  |      | —    | —    | —            | DMA4IP<2:0>  |            |              | DMA4IS<1:0>  |               | 0000 |      |
| 1140                        | IPC11            | 31:16     | —     | —     | —            | —            | —     | —            | —            | —    | —    | —    | —            | CAN1IP<2:0>  |            |              | CAN1IS<1:0>  |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | —            | USBIP<2:0>   |       |              | USBIS<1:0>   |      | —    | —    | —            | FCEIP<2:0>   |            |              | FCEIS<1:0>   |               | 0000 |      |
| 1150                        | IPC12            | 31:16     | —     | —     | —            | U3BIP<2:0>   |       |              | U3BIS<1:0>   |      | —    | —    | —            | U2BIP<2:0>   |            |              | U2BIS<1:0>   |               | 0000 |      |
|                             |                  | 15:0      | —     | —     | —            | U1BIP<2:0>   |       |              | U1BIS<1:0>   |      | —    | —    | —            | —            | —          | —            | —            | —             | 0000 |      |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-3: INTERRUPT REGISTER MAP FOR THE PIC32MX675F512H AND PIC32MX695F512H DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits        |         |         |             |           |           |             |          |          |          |          |            |        |        |            |        | All Resets |           |           |          |           |           |          |
|-----------------------------|------------------|-----------|-------------|---------|---------|-------------|-----------|-----------|-------------|----------|----------|----------|----------|------------|--------|--------|------------|--------|------------|-----------|-----------|----------|-----------|-----------|----------|
|                             |                  |           | 31/15       | 30/14   | 29/13   | 28/12       | 27/11     | 26/10     | 25/9        | 24/8     | 23/7     | 22/6     | 21/5     | 20/4       | 19/3   | 18/2   | 17/1       | 16/0   |            |           |           |          |           |           |          |
| 1000                        | INTCON           | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —        | —        | —        | —          | —      | —      | —          | SS0    | 0000       |           |           |          |           |           |          |
|                             |                  | 15:0      | —           | FRZ     | —       | MVEC        | —         | TRC<2:0>  |             |          | —        | —        | —        | INT4EP     | INT3EP | INT2EP | INT1EP     | INT0EP | 0000       |           |           |          |           |           |          |
| 1010                        | INTSTAT          | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —        | —        | —        | —          | —      | —      | —          | —      | 0000       |           |           |          |           |           |          |
|                             |                  | 15:0      | —           | —       | —       | —           | —         | RIPL<2:0> |             |          | —        | —        | VEC<5:0> |            |        |        |            |        | 0000       |           |           |          |           |           |          |
| 1020                        | IPTMR            | 31:16     | IPTMR<31:0> |         |         |             |           |           |             |          |          |          |          |            |        |        |            |        | 0000       |           |           |          |           |           |          |
|                             |                  | 15:0      |             |         |         |             |           |           |             |          |          |          |          |            |        |        |            |        | 0000       |           |           |          |           |           |          |
| 1030                        | IFS0             | 31:16     | I2C1MIF     | I2CSIF  | I2CBIF  | U1ATXIF     | U1ARXIF   | U1AEIF    | —           | —        | —        | OC5IF    | IC5IF    | T5IF       | INT4IF | OC4IF  | IC4IF      | T4IF   | 0000       |           |           |          |           |           |          |
|                             |                  |           |             |         |         | SPI1ATXIF   | SPI1ARXIF | SPI1AEIF  |             |          |          |          |          |            |        |        |            |        |            |           |           |          |           |           |          |
|                             |                  |           |             |         |         | I2C1AMIF    | I2C1ASIF  | I2C1ABIF  |             |          |          |          |          |            |        |        |            |        |            |           |           |          |           |           |          |
|                             |                  | 15:0      | INT3IF      | OC3IF   | IC3IF   | T3IF        | INT2IF    | OC2IF     | IC2IF       | T2IF     | INT1IF   | OC1IF    | IC1IF    | T1IF       | INT0IF | CS1IF  | CS0IF      | CTIF   | 0000       |           |           |          |           |           |          |
| 1040                        | IFS1             | 31:16     | IC3EIF      | IC2EIF  | IC1EIF  | ETHIF       | —         | —         | USBIF       | FCEIF    | DMA7IF   | DMA6IF   | DMA5IF   | DMA4IF     | DMA3IF | DMA2IF | DMA1IF     | DMA0IF | 0000       |           |           |          |           |           |          |
|                             |                  |           |             |         |         |             |           |           |             |          |          |          |          |            |        |        |            |        |            | U3ATXIF   | U3ARXIF   | U3AEIF   | U2ATXIF   | U2ARXIF   | U2AEIF   |
|                             |                  |           |             |         |         |             |           |           |             |          |          |          |          |            |        |        |            |        |            | SPI3ATXIF | SPI3ARXIF | SPI3AEIF | SPI2ATXIF | SPI2ARXIF | SPI2AEIF |
|                             |                  | 15:0      | RTCCIF      | FSCMIF  | —       | —           | —         | I2C3AMIF  | I2C3ASIF    | I2C3ASIF | I2C2AMIF | I2C2ASIF | I2C2ABIF | CMP2IF     | CMP1IF | PMPIF  | AD1IF      | CNIF   | 0000       |           |           |          |           |           |          |
| 1050                        | IFS2             | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —        | —        | —        | —          | —      | —      | —          | —      | 0000       |           |           |          |           |           |          |
|                             |                  | 15:0      | —           | —       | —       | —           | U3BTXIF   | U3BRXIF   | U3BEIF      | U2BTXIF  | U2BRXIF  | U2BEIF   | U1BTXIF  | U1BRXIF    | U1BEIF | PMPEIF | IC5EIF     | IC4EIF | 0000       |           |           |          |           |           |          |
| 1060                        | IEC0             | 31:16     | I2C1MIE     | I2C1SIE | I2C1BIE | U1ATXIE     | U1ARXIE   | U1AEIE    | —           | —        | —        | OC5IE    | IC5IE    | T5IE       | INT4IE | OC4IE  | IC4IE      | T4IE   | 0000       |           |           |          |           |           |          |
|                             |                  |           |             |         |         | SPI1ATXIE   | SPI1ARXIE | SPI1AEIE  |             |          |          |          |          |            |        |        |            |        |            |           |           |          |           |           |          |
|                             |                  |           |             |         |         | I2C1AMIE    | I2C1ASIE  | I2C1ABIE  |             |          |          |          |          |            |        |        |            |        |            |           |           |          |           |           |          |
|                             |                  | 15:0      | INT3IE      | OC3IE   | IC3IE   | T3IE        | INT2IE    | OC2IE     | IC2IE       | T2IE     | INT1IE   | OC1IE    | IC1IE    | T1IE       | INT0IE | CS1IE  | CS0IE      | CTIE   | 0000       |           |           |          |           |           |          |
| 1070                        | IEC1             | 31:16     | IC3EIE      | IC2EIE  | IC1EIE  | ETHIE       | —         | —         | USBIE       | FCEIE    | DMA7IE   | DMA6IE   | DMA5IE   | DMA4IE     | DMA3IE | DMA2IE | DMA1IE     | DMA0IE | 0000       |           |           |          |           |           |          |
|                             |                  |           |             |         |         |             |           |           |             |          |          |          |          |            |        |        |            |        |            | U3ATXIE   | U3ARXIE   | U3AEIE   | U2ATXIE   | U2ARXIE   | U2AEIE   |
|                             |                  |           |             |         |         |             |           |           |             |          |          |          |          |            |        |        |            |        |            | SPI3ATXIE | SPI3ARXIE | SPI3AEIE | SPI2ATXIE | SPI2ARXIE | SPI2AEIE |
|                             |                  | 15:0      | RTCCIE      | FSCMIE  | —       | —           | —         | I2C3AMIE  | I2C3ASIE    | I2C3ASIE | I2C2AMIE | I2C2ASIE | I2C2ABIE | CMP2IE     | CMP1IE | PMPIE  | AD1IE      | CNIE   | 0000       |           |           |          |           |           |          |
| 1080                        | IEC2             | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —        | —        | —        | —          | —      | —      | —          | —      | 0000       |           |           |          |           |           |          |
|                             |                  | 15:0      | —           | —       | —       | —           | U3BTXIE   | U3BRXIE   | U3BEIE      | U2BTXIE  | U2BRXIE  | U2BEIE   | U1BTXIE  | U1BRXIE    | U1BEIE | PMPEIE | IC5EIE     | IC4EIE | 0000       |           |           |          |           |           |          |
| 1090                        | IPC0             | 31:16     | —           | —       | —       | INT0IP<2:0> |           |           | INT0IS<1:0> |          |          | —        | —        | CS1IP<2:0> |        |        | CS1IS<1:0> |        | 0000       |           |           |          |           |           |          |
|                             |                  | 15:0      | —           | —       | —       | CS0IP<2:0>  |           |           | CS0IS<1:0>  |          |          | —        | —        | CTIP<2:0>  |        |        | CTIS<1:0>  |        | 0000       |           |           |          |           |           |          |
| 10A0                        | IPC1             | 31:16     | —           | —       | —       | INT1IP<2:0> |           |           | INT1IS<1:0> |          |          | —        | —        | OC1IP<2:0> |        |        | OC1IS<1:0> |        | 0000       |           |           |          |           |           |          |
|                             |                  | 15:0      | —           | —       | —       | IC1IP<2:0>  |           |           | IC1IS<1:0>  |          |          | —        | —        | T1IP<2:0>  |        |        | T1IS<1:0>  |        | 0000       |           |           |          |           |           |          |
| 10B0                        | IPC2             | 31:16     | —           | —       | —       | INT2IP<2:0> |           |           | INT2IS<1:0> |          |          | —        | —        | OC2IP<2:0> |        |        | OC2IS<1:0> |        | 0000       |           |           |          |           |           |          |
|                             |                  | 15:0      | —           | —       | —       | IC2IP<2:0>  |           |           | IC2IS<1:0>  |          |          | —        | —        | T2IP<2:0>  |        |        | T2IS<1:0>  |        | 0000       |           |           |          |           |           |          |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-3: INTERRUPT REGISTER MAP FOR THE PIC32MX675F512H AND PIC32MX695F512H DEVICES<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits  |       |              |             |       |              |             |      |      |              |              |             |              |              |             |      | All Resets |
|-----------------------------|------------------|-----------|-------|-------|--------------|-------------|-------|--------------|-------------|------|------|--------------|--------------|-------------|--------------|--------------|-------------|------|------------|
|                             |                  |           | 31/15 | 30/14 | 29/13        | 28/12       | 27/11 | 26/10        | 25/9        | 24/8 | 23/7 | 22/6         | 21/5         | 20/4        | 19/3         | 18/2         | 17/1        | 16/0 |            |
| 10C0                        | IPC3             | 31:16     | —     | —     | —            | INT3IP<2:0> |       |              | INT3IS<1:0> |      | —    | —            | —            | OC3IP<2:0>  |              |              | OC3IS<1:0>  |      | 0000       |
|                             |                  | 15:0      | —     | —     | —            | IC3IP<2:0>  |       |              | IC3IS<1:0>  |      | —    | —            | —            | T3IP<2:0>   |              |              | T3IS<1:0>   |      | 0000       |
| 10D0                        | IPC4             | 31:16     | —     | —     | —            | INT4IP<2:0> |       |              | INT4IS<1:0> |      | —    | —            | —            | OC4IP<2:0>  |              |              | OC4IS<1:0>  |      | 0000       |
|                             |                  | 15:0      | —     | —     | —            | IC4IP<2:0>  |       |              | IC4IS<1:0>  |      | —    | —            | —            | T4IP<2:0>   |              |              | T4IS<1:0>   |      | 0000       |
| 10E0                        | IPC5             | 31:16     | —     | —     | —            | —           | —     | —            | —           | —    | —    | —            | —            | OC5IP<2:0>  |              |              | OC5IS<1:0>  |      | 0000       |
|                             |                  | 15:0      | —     | —     | —            | IC5IP<2:0>  |       |              | IC5IS<1:0>  |      | —    | —            | —            | T5IP<2:0>   |              |              | T5IS<1:0>   |      | 0000       |
| 10F0                        | IPC6             | 31:16     | —     | —     | —            | AD1IP<2:0>  |       |              | AD1IS<1:0>  |      | —    | —            | —            | CNIP<2:0>   |              |              | CNIS<1:0>   |      | 0000       |
|                             |                  | 15:0      | —     | —     | I2C1IP<2:0>  |             |       | I2C1IS<1:0>  |             | —    | —    | —            | U1AIP<2:0>   |             |              | U1AIS<1:0>   |             | 0000 |            |
|                             |                  |           |       |       |              |             |       |              |             |      |      |              | SPI1AIP<2:0> |             |              | SPI1AIS<1:0> |             |      |            |
|                             |                  |           |       |       |              |             |       |              |             |      |      |              | I2C1AIP<2:0> |             |              | I2C1AIS<1:0> |             |      |            |
| 1100                        | IPC7             | 31:16     | —     | —     | U2AIP<2:0>   |             |       | U2AIS<1:0>   |             | —    | —    | —            | CMP2IP<2:0>  |             |              | CMP2IS<1:0>  |             | 0000 |            |
|                             |                  |           |       |       | SPI2AIP<2:0> |             |       | SPI2AIS<1:0> |             |      |      |              |              |             |              |              |             |      |            |
|                             |                  |           |       |       | I2C2AIP<2:0> |             |       | I2C2AIS<1:0> |             |      |      |              |              |             |              |              |             |      |            |
|                             |                  | 15:0      | —     | —     | —            | CMP1IP<2:0> |       |              | CMP1IS<1:0> |      | —    | —            | —            | PMPIP<2:0>  |              |              | PMPIS<1:0>  |      | 0000       |
| 1110                        | IPC8             | 31:16     | —     | —     | —            | RTCCIP<2:0> |       |              | RTCCIS<1:0> |      | —    | —            | —            | FSCMIP<2:0> |              |              | FSCMIS<1:0> |      | 0000       |
|                             |                  | 15:0      | —     | —     | —            | —           | —     | —            | —           | —    | —    | U3AIP<2:0>   |              |             | U3AIS<1:0>   |              | 0000        |      |            |
|                             |                  |           |       |       |              |             |       |              |             |      |      | SPI3AIP<2:0> |              |             | SPI3AIS<1:0> |              |             |      |            |
|                             |                  |           |       |       |              |             |       |              |             |      |      | I2C3AIP<2:0> |              |             | I2C3AIS<1:0> |              |             |      |            |
| 1120                        | IPC9             | 31:16     | —     | —     | —            | DMA3IP<2:0> |       |              | DMA3IS<1:0> |      | —    | —            | —            | DMA2IP<2:0> |              |              | DMA2IS<1:0> |      | 0000       |
|                             |                  | 15:0      | —     | —     | —            | DMA1IP<2:0> |       |              | DMA1IS<1:0> |      | —    | —            | —            | DMA0IP<2:0> |              |              | DMA0IS<1:0> |      | 0000       |
| 1130                        | IPC10            | 31:16     | —     | —     | —            | DMA7IP<2:0> |       |              | DMA7IS<1:0> |      | —    | —            | —            | DMA6IP<2:0> |              |              | DMA6IS<1:0> |      | 0000       |
|                             |                  | 15:0      | —     | —     | —            | DMA5IP<2:0> |       |              | DMA5IS<1:0> |      | —    | —            | —            | DMA4IP<2:0> |              |              | DMA4IS<1:0> |      | 0000       |
| 1140                        | IPC11            | 31:16     | —     | —     | —            | —           | —     | —            | —           | —    | —    | —            | —            | —           | —            | —            | —           | 0000 |            |
|                             |                  | 15:0      | —     | —     | —            | USBIP<2:0>  |       |              | USBIS<1:0>  |      | —    | —            | —            | FCEIP<2:0>  |              |              | FCEIS<1:0>  |      | 0000       |
| 1150                        | IPC12            | 31:16     | —     | —     | —            | U3BIP<2:0>  |       |              | U3BIS<1:0>  |      | —    | —            | —            | U2BIP<2:0>  |              |              | U2BIS<1:0>  |      | 0000       |
|                             |                  | 15:0      | —     | —     | —            | U1BIP<2:0>  |       |              | U1BIS<1:0>  |      | —    | —            | —            | ETHIP<2:0>  |              |              | ETHIS<1:0>  |      | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-4: INTERRUPT REGISTER MAP FOR THE PIC32MX795F512H DEVICE<sup>(1)</sup>**

| Virtual Address<br>(BF88-#) | Register<br>Name | Bit Range | Bits        |         |         |                                  |                                  |                                |             |           |           |          |          |         |            |        |        |            | All Resets |
|-----------------------------|------------------|-----------|-------------|---------|---------|----------------------------------|----------------------------------|--------------------------------|-------------|-----------|-----------|----------|----------|---------|------------|--------|--------|------------|------------|
|                             |                  |           | 31/15       | 30/14   | 29/13   | 28/12                            | 27/11                            | 26/10                          | 25/9        | 24/8      | 23/7      | 22/6     | 21/5     | 20/4    | 19/3       | 18/2   | 17/1   | 16/0       |            |
| 1000                        | INTCON           | 31:16     | —           | —       | —       | —                                | —                                | —                              | —           | —         | —         | —        | —        | —       | —          | —      | —      | SS0        | 0000       |
|                             |                  | 15:0      | —           | FRZ     | —       | MVEC                             | —                                | TRC<2:0>                       |             |           | —         | —        | —        | INT4EP  | INT3EP     | INT2EP | INT1EP | INT0EP     | 0000       |
| 1010                        | INTSTAT          | 31:16     | —           | —       | —       | —                                | —                                | —                              | —           | —         | —         | —        | —        | —       | —          | —      | —      | —          | 0000       |
|                             |                  | 15:0      | —           | —       | —       | —                                | —                                | RIPL<2:0>                      |             |           | —         | —        | VEC<5:0> |         |            |        |        |            | 0000       |
| 1020                        | IPTMR            | 31:16     | IPTMR<31:0> |         |         |                                  |                                  |                                |             |           |           |          |          |         |            |        |        |            | 0000       |
|                             |                  | 15:0      |             |         |         |                                  |                                  |                                |             |           |           |          |          |         |            |        |        |            | 0000       |
| 1030                        | IFS0             | 31:16     | I2C1MIF     | I2CSIF  | I2CBIF  | U1ATXIF<br>SPI1ATXIF<br>I2C1AMIF | U1ARXIF<br>SPI1ARXIF<br>I2C1ASIF | U1AEIF<br>SPI1AEIF<br>I2C1ABIF | —           | —         | —         | OC5IF    | IC5IF    | T5IF    | INT4IF     | OC4IF  | IC4IF  | T4IF       | 0000       |
|                             |                  | 15:0      | INT3IF      | OC3IF   | IC3IF   | T3IF                             | INT2IF                           | OC2IF                          | IC2IF       | T2IF      | INT1IF    | OC1IF    | IC1IF    | T1IF    | INT0IF     | CS1IF  | CS0IF  | CTIF       | 0000       |
| 1040                        | IFS1             | 31:16     | IC3EIF      | IC2EIF  | IC1EIF  | ETHIF                            | CAN2IF                           | CAN1IF                         | USBIF       | FCEIF     | DMA7IF    | DMA6IF   | DMA5IF   | DMA4IF  | DMA3IF     | DMA2IF | DMA1IF | DMA0IF     | 0000       |
|                             |                  | 15:0      | RTCCIF      | FSCMIF  | —       | —                                | U3ATXIF                          | U3ARXIF                        | U3AEIF      | U2ATXIF   | U2ARXIF   | U2AEIF   | CMP2IF   | CMP1IF  | PMPIF      | AD1IF  | CNIF   | 0000       |            |
|                             |                  |           |             |         |         |                                  | SPI3ATXIF                        | SPI3ARXIF                      | SPI3AEIF    | SPI2ATXIF | SPI2ARXIF | SPI2AEIF |          |         |            |        |        |            | I2C3AMIF   |
| 1050                        | IFS2             | 31:16     | —           | —       | —       | —                                | —                                | —                              | —           | —         | —         | —        | —        | —       | —          | —      | —      | —          | 0000       |
|                             |                  | 15:0      | —           | —       | —       | —                                | U3BTXIF                          | U3BRXIF                        | U3BEIF      | U2BTXIF   | U2BRXIF   | U2BEIF   | U1BTXIF  | U1BRXIF | U1BEIF     | PMPEIF | IC5EIF | IC4EIF     | 0000       |
| 1060                        | IEC0             | 31:16     | I2C1MIE     | I2C1SIE | I2C1BIE | U1ATXIE<br>SPI1ATXIE<br>I2C1AMIE | U1ARXIE<br>SPI1ARXIE<br>I2C1ASIE | U1AEIE<br>SPI1AEIE<br>I2C1ABIE | —           | —         | —         | OC5IE    | IC5IE    | T5IE    | INT4IE     | OC4IE  | IC4IE  | T4IE       | 0000       |
|                             |                  | 15:0      | INT3IE      | OC3IE   | IC3IE   | T3IE                             | INT2IE                           | OC2IE                          | IC2IE       | T2IE      | INT1IE    | OC1IE    | IC1IE    | T1IE    | INT0IE     | CS1IE  | CS0IE  | CTIE       | 0000       |
| 1070                        | IEC1             | 31:16     | IC3EIE      | IC2EIE  | IC1EIE  | ETHIE                            | CAN2IE                           | CAN1IE                         | USBIE       | FCEIE     | DMA7IE    | DMA6IE   | DMA5IE   | DMA4IE  | DMA3IE     | DMA2IE | DMA1IE | DMA0IE     | 0000       |
|                             |                  | 15:0      | RTCCIE      | FSCMIE  | —       | —                                | U3ATXIE                          | U3ARXIE                        | U3AEIE      | U2ATXIE   | U2ARXIE   | U2AEIE   | CMP2IE   | CMP1IE  | PMPIE      | AD1IE  | CNIE   | 0000       |            |
|                             |                  |           |             |         |         |                                  | SPI3ATXIE                        | SPI3ARXIE                      | SPI3AEIE    | SPI2ATXIE | SPI2ARXIE | SPI2AEIE |          |         |            |        |        |            | I2C3AMIE   |
| 1080                        | IEC2             | 31:16     | —           | —       | —       | —                                | —                                | —                              | —           | —         | —         | —        | —        | —       | —          | —      | —      | —          | 0000       |
|                             |                  | 15:0      | —           | —       | —       | —                                | U3BTXIE                          | U3BRXIE                        | U3BEIE      | U2BTXIE   | U2BRXIE   | U2BEIE   | U1BTXIE  | U1BRXIE | U1BEIE     | PMPEIE | IC5EIE | IC4EIE     | 0000       |
| 1090                        | IPC0             | 31:16     | —           | —       | —       | INT0IP<2:0>                      |                                  |                                | INT0IS<1:0> |           |           | —        | —        | —       | CS1IP<2:0> |        |        | CS1IS<1:0> | 0000       |
|                             |                  | 15:0      | —           | —       | —       | CS0IP<2:0>                       |                                  |                                | CS0IS<1:0>  |           |           | —        | —        | —       | CTIP<2:0>  |        |        | CTIS<1:0>  | 0000       |
| 10A0                        | IPC1             | 31:16     | —           | —       | —       | INT1IP<2:0>                      |                                  |                                | INT1IS<1:0> |           |           | —        | —        | —       | OC1IP<2:0> |        |        | OC1IS<1:0> | 0000       |
|                             |                  | 15:0      | —           | —       | —       | IC1IP<2:0>                       |                                  |                                | IC1IS<1:0>  |           |           | —        | —        | —       | T1IP<2:0>  |        |        | T1IS<1:0>  | 0000       |
| 10B0                        | IPC2             | 31:16     | —           | —       | —       | INT2IP<2:0>                      |                                  |                                | INT2IS<1:0> |           |           | —        | —        | —       | OC2IP<2:0> |        |        | OC2IS<1:0> | 0000       |
|                             |                  | 15:0      | —           | —       | —       | IC2IP<2:0>                       |                                  |                                | IC2IS<1:0>  |           |           | —        | —        | —       | T2IP<2:0>  |        |        | T2IS<1:0>  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-4: INTERRUPT REGISTER MAP FOR THE PIC32MX795F512H DEVICE<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88..#) | Register<br>Name | Bit Range | Bits  |       |       |              |       |       |              |      |      |      |              |             |              |              |             |              | All Resets |      |  |
|------------------------------|------------------|-----------|-------|-------|-------|--------------|-------|-------|--------------|------|------|------|--------------|-------------|--------------|--------------|-------------|--------------|------------|------|--|
|                              |                  |           | 31/15 | 30/14 | 29/13 | 28/12        | 27/11 | 26/10 | 25/9         | 24/8 | 23/7 | 22/6 | 21/5         | 20/4        | 19/3         | 18/2         | 17/1        | 16/0         |            |      |  |
| 10C0                         | IPC3             | 31:16     | —     | —     | —     | INT3IP<2:0>  |       |       | INT3IS<1:0>  |      | —    | —    | —            | OC3IP<2:0>  |              |              | OC3IS<1:0>  |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | IC3IP<2:0>   |       |       | IC3IS<1:0>   |      | —    | —    | —            | T3IP<2:0>   |              |              | T3IS<1:0>   |              | 0000       |      |  |
| 10D0                         | IPC4             | 31:16     | —     | —     | —     | INT4IP<2:0>  |       |       | INT4IS<1:0>  |      | —    | —    | —            | OC4IP<2:0>  |              |              | OC4IS<1:0>  |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | IC4IP<2:0>   |       |       | IC4IS<1:0>   |      | —    | —    | —            | T4IP<2:0>   |              |              | T4IS<1:0>   |              | 0000       |      |  |
| 10E0                         | IPC5             | 31:16     | —     | —     | —     | —            | —     | —     | —            | —    | —    | —    | —            | OC5IP<2:0>  |              |              | OC5IS<1:0>  |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | IC5IP<2:0>   |       |       | IC5IS<1:0>   |      | —    | —    | —            | T5IP<2:0>   |              |              | T5IS<1:0>   |              | 0000       |      |  |
| 10F0                         | IPC6             | 31:16     | —     | —     | —     | AD1IP<2:0>   |       |       | AD1IS<1:0>   |      | —    | —    | —            | CNIP<2:0>   |              |              | CNIS<1:0>   |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | I2C1IP<2:0>  |       |       | I2C1IS<1:0>  |      |      | —    | —            | —           | U1AIP<2:0>   |              |             | U1AIS<1:0>   |            | 0000 |  |
|                              |                  |           |       |       |       |              |       |       |              |      |      |      |              |             | SPI1AIP<2:0> |              |             | SPI1AIS<1:0> |            |      |  |
|                              |                  |           |       |       |       |              |       |       |              |      |      |      |              |             | I2C1AIP<2:0> |              |             | I2C1AIS<1:0> |            |      |  |
| 1100                         | IPC7             | 31:16     | —     | —     | —     | U2AIP<2:0>   |       |       | U2AIS<1:0>   |      | —    | —    | —            | CMP2IP<2:0> |              |              | CMP2IS<1:0> |              | 0000       |      |  |
|                              |                  |           |       |       |       | SPI2AIP<2:0> |       |       | SPI2AIS<1:0> |      |      |      |              |             |              |              |             |              |            |      |  |
|                              |                  |           |       |       |       | I2C2AIP<2:0> |       |       | I2C2AIS<1:0> |      |      |      |              |             |              |              |             |              |            |      |  |
|                              |                  | 15:0      | —     | —     | —     | CMP1IP<2:0>  |       |       | CMP1IS<1:0>  |      | —    | —    | —            | PMPIP<2:0>  |              |              | PMPIS<1:0>  |              | 0000       |      |  |
| 1110                         | IPC8             | 31:16     | —     | —     | —     | RTCCIP<2:0>  |       |       | RTCCIS<1:0>  |      | —    | —    | —            | FSCMP<2:0>  |              |              | FSCMIS<1:0> |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | —            | —     | —     | —            | —    | —    | —    | U3AIP<2:0>   |             |              | U3AIS<1:0>   |             | 0000         |            |      |  |
|                              |                  |           |       |       |       |              |       |       |              |      |      |      | SPI3AIP<2:0> |             |              | SPI3AIS<1:0> |             |              |            |      |  |
|                              |                  |           |       |       |       |              |       |       |              |      |      |      | I2C3AIP<2:0> |             |              | I2C3AIS<1:0> |             |              |            |      |  |
| 1120                         | IPC9             | 31:16     | —     | —     | —     | DMA3IP<2:0>  |       |       | DMA3IS<1:0>  |      | —    | —    | —            | DMA2IP<2:0> |              |              | DMA2IS<1:0> |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | DMA1IP<2:0>  |       |       | DMA1IS<1:0>  |      | —    | —    | —            | DMA0IP<2:0> |              |              | DMA0IS<1:0> |              | 0000       |      |  |
| 1130                         | IPC10            | 31:16     | —     | —     | —     | DMA7IP<2:0>  |       |       | DMA7IS<1:0>  |      | —    | —    | —            | DMA6IP<2:0> |              |              | DMA6IS<1:0> |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | DMA5IP<2:0>  |       |       | DMA5IS<1:0>  |      | —    | —    | —            | DMA4IP<2:0> |              |              | DMA4IS<1:0> |              | 0000       |      |  |
| 1140                         | IPC11            | 31:16     | —     | —     | —     | CAN2IP<2:0>  |       |       | CAN2IS<1:0>  |      | —    | —    | —            | CAN1IP<2:0> |              |              | CAN1IS<1:0> |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | USBIP<2:0>   |       |       | USBIS<1:0>   |      | —    | —    | —            | FCEIP<2:0>  |              |              | FCEIS<1:0>  |              | 0000       |      |  |
| 1150                         | IPC12            | 31:16     | —     | —     | —     | U3BIP<2:0>   |       |       | U3BIS<1:0>   |      | —    | —    | —            | U2BIP<2:0>  |              |              | U2BIS<1:0>  |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | U1BIP<2:0>   |       |       | U1BIS<1:0>   |      | —    | —    | —            | ETHIP<2:0>  |              |              | ETHIS<1:0>  |              | 0000       |      |  |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-5: INTERRUPT REGISTER MAP FOR THE PIC32MX575F512L AND PIC32MX575F256L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88-#) | Register<br>Name | Bit Range | Bits        |         |         |             |          |           |             |          |           |           |          |         |            |        |        |            | All Resets |      |
|-----------------------------|------------------|-----------|-------------|---------|---------|-------------|----------|-----------|-------------|----------|-----------|-----------|----------|---------|------------|--------|--------|------------|------------|------|
|                             |                  |           | 31/15       | 30/14   | 29/13   | 28/12       | 27/11    | 26/10     | 25/9        | 24/8     | 23/7      | 22/6      | 21/5     | 20/4    | 19/3       | 18/2   | 17/1   | 16/0       |            |      |
| 1000                        | INTCON           | 31:16     | —           | —       | —       | —           | —        | —         | —           | —        | —         | —         | —        | —       | —          | —      | —      | SS0        | 0000       |      |
|                             |                  | 15:0      | —           | FRZ     | —       | MVEC        | —        | TRC<2:0>  |             |          | —         | —         | —        | INT4EP  | INT3EP     | INT2EP | INT1EP | INT0EP     | 0000       |      |
| 1010                        | INTSTAT          | 31:16     | —           | —       | —       | —           | —        | —         | —           | —        | —         | —         | —        | —       | —          | —      | —      | —          | 0000       |      |
|                             |                  | 15:0      | —           | —       | —       | —           | —        | RIPL<2:0> |             |          | —         | —         | VEC<5:0> |         |            |        |        |            | 0000       |      |
| 1020                        | IPTMR            | 31:16     | IPTMR<31:0> |         |         |             |          |           |             |          |           |           |          |         |            |        |        |            | 0000       |      |
|                             |                  | 15:0      |             |         |         |             |          |           |             |          |           |           |          |         |            |        |        |            | 0000       |      |
| 1030                        | IFS0             | 31:16     | I2C1MIF     | I2CSIF  | I2CBIF  | U1ATXIF     | U1ARXIF  | U1AEIF    | SPI1TXIF    | SPI1RXIF | SPI1EIF   | OC5IF     | IC5IF    | T5IF    | INT4IF     | OC4IF  | IC4IF  | T4IF       | 0000       |      |
|                             |                  | SPI1ATXIF |             |         |         | SPI1ARXIF   | SPI1AEIF |           |             |          |           |           |          |         |            |        |        |            |            |      |
|                             |                  | I2C1AMIF  |             |         |         | I2C1ASIF    | I2C1ABIF |           |             |          |           |           |          |         |            |        |        |            |            |      |
| 15:0                        | INT3IF           | OC3IF     | IC3IF       | T3IF    | INT2IF  | OC2IF       | IC2IF    | T2IF      | INT1IF      | OC1IF    | IC1IF     | T1IF      | INT0IF   | CS1IF   | CS0IF      | CTIF   | 0000   |            |            |      |
| 1040                        | IFS1             | 31:16     | IC3EIF      | IC2EIF  | IC1EIF  | —           | —        | CAN1IF    | USBIF       | FCEIF    | DMA7IF    | DMA6IF    | DMA5IF   | DMA4IF  | DMA3IF     | DMA2IF | DMA1IF | DMA0IF     | 0000       |      |
|                             |                  | 15:0      | RTCCIF      | FSCMIF  | I2C2MIF | I2C2SIF     | I2C2BIF  | U3ATXIF   | U3ARXIF     | U3AEIF   | U2ATXIF   | U2ARXIF   | U2AEIF   | CMP2IF  | CMP1IF     | PMPIF  | AD1IF  | CNIF       | 0000       |      |
|                             |                  |           |             |         |         |             |          | SPI3ATXIF | SPI3ARXIF   | SPI3AEIF | SPI2ATXIF | SPI2ARXIF | SPI2AEIF |         |            |        |        |            |            |      |
| 15:0                        |                  |           |             |         |         |             | I2C3AMIF | I2C3ASIF  | I2C3ASIF    | I2C2AMIF | I2C2ASIF  | I2C2ABIF  |          |         |            |        |        |            |            |      |
| 1050                        | IFS2             | 31:16     | —           | —       | —       | —           | —        | —         | —           | —        | —         | —         | —        | —       | —          | —      | —      | —          | 0000       |      |
|                             |                  | 15:0      | —           | —       | —       | —           | —        | U3BTXIF   | U3BRXIF     | U3BEIF   | U2BTXIF   | U2BRXIF   | U2BEIF   | U1BTXIF | U1BRXIF    | U1BEIF | PMPEIF | IC5EIF     | IC4EIF     | 0000 |
| 1060                        | IEC0             | 31:16     | I2C1MIE     | I2C1SIE | I2C1BIE | U1ATXIE     | U1ARXIE  | U1AEIE    | SPI1TXIE    | SPI1RXIE | SPI1EIE   | OC5IE     | IC5IE    | T5IE    | INT4IE     | OC4IE  | IC4IE  | T4IE       | 0000       |      |
|                             |                  | SPI1ATXIE |             |         |         | SPI1ARXIE   | SPI1AEIE |           |             |          |           |           |          |         |            |        |        |            |            |      |
|                             |                  | I2C1AMIE  |             |         |         | I2C1ASIE    | I2C1ABIE |           |             |          |           |           |          |         |            |        |        |            |            |      |
| 15:0                        | INT3IE           | OC3IE     | IC3IE       | T3IE    | INT2IE  | OC2IE       | IC2IE    | T2IE      | INT1IE      | OC1IE    | IC1IE     | T1IE      | INT0IE   | CS1IE   | CS0IE      | CTIE   | 0000   |            |            |      |
| 1070                        | IEC1             | 31:16     | IC3EIE      | IC2EIE  | IC1EIE  | —           | —        | CAN1IE    | USBIE       | FCEIE    | DMA7IE    | DMA6IE    | DMA5IE   | DMA4IE  | DMA3IE     | DMA2IE | DMA1IE | DMA0IE     | 0000       |      |
|                             |                  | 15:0      | RTCCIE      | FSCMIE  | I2C2MIE | I2C2SIE     | I2C2BIE  | U3ATXIE   | U3ARXIE     | U3AEIE   | U2ATXIE   | U2ARXIE   | U2AEIE   | CMP2IE  | CMP1IE     | PMPIE  | AD1IE  | CNIE       | 0000       |      |
|                             |                  |           |             |         |         |             |          | SPI3ATXIE | SPI3ARXIE   | SPI3AEIE | SPI2ATXIE | SPI2ARXIE | SPI2AEIE |         |            |        |        |            |            |      |
| 15:0                        |                  |           |             |         |         |             | I2C3AMIE | I2C3ASIE  | I2C3ASIE    | I2C2AMIE | I2C2ASIE  | I2C2ABIE  |          |         |            |        |        |            |            |      |
| 1080                        | IEC2             | 31:16     | —           | —       | —       | —           | —        | —         | —           | —        | —         | —         | —        | —       | —          | —      | —      | —          | 0000       |      |
|                             |                  | 15:0      | —           | —       | —       | —           | —        | U3BTXIE   | U3BRXIE     | U3BEIE   | U2BTXIE   | U2BRXIE   | U2BEIE   | U1BTXIE | U1BRXIE    | U1BEIE | PMPEIE | IC5EIE     | IC4EIE     | 0000 |
| 1090                        | IPC0             | 31:16     | —           | —       | —       | INT0IP<2:0> |          |           | INT0IS<1:0> |          |           | —         | —        | —       | CS1IP<2:0> |        |        | CS1IS<1:0> |            | 0000 |
|                             |                  | 15:0      | —           | —       | —       | CS0IP<2:0>  |          |           | CS0IS<1:0>  |          |           | —         | —        | —       | CTIP<2:0>  |        |        | CTIS<1:0>  |            | 0000 |
| 10A0                        | IPC1             | 31:16     | —           | —       | —       | INT1IP<2:0> |          |           | INT1IS<1:0> |          |           | —         | —        | —       | OC1IP<2:0> |        |        | OC1IS<1:0> |            | 0000 |
|                             |                  | 15:0      | —           | —       | —       | IC1IP<2:0>  |          |           | IC1IS<1:0>  |          |           | —         | —        | —       | T1IP<2:0>  |        |        | T1IS<1:0>  |            | 0000 |
| 10B0                        | IPC2             | 31:16     | —           | —       | —       | INT2IP<2:0> |          |           | INT2IS<1:0> |          |           | —         | —        | —       | OC2IP<2:0> |        |        | OC2IS<1:0> |            | 0000 |
|                             |                  | 15:0      | —           | —       | —       | IC2IP<2:0>  |          |           | IC2IS<1:0>  |          |           | —         | —        | —       | T2IP<2:0>  |        |        | T2IS<1:0>  |            | 0000 |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-5: INTERRUPT REGISTER MAP FOR THE PIC32MX575F512L AND PIC32MX575F256L DEVICES<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88..#) | Register<br>Name | Bit Range | Bits  |       |       |              |       |       |              |      |      |      |      |             |              |      |             |              | All Resets |      |  |
|------------------------------|------------------|-----------|-------|-------|-------|--------------|-------|-------|--------------|------|------|------|------|-------------|--------------|------|-------------|--------------|------------|------|--|
|                              |                  |           | 31/15 | 30/14 | 29/13 | 28/12        | 27/11 | 26/10 | 25/9         | 24/8 | 23/7 | 22/6 | 21/5 | 20/4        | 19/3         | 18/2 | 17/1        | 16/0         |            |      |  |
| 10C0                         | IPC3             | 31:16     | —     | —     | —     | INT3IP<2:0>  |       |       | INT3IS<1:0>  |      |      | —    | —    | —           | OC3IP<2:0>   |      |             | OC3IS<1:0>   |            | 0000 |  |
|                              |                  | 15:0      | —     | —     | —     | IC3IP<2:0>   |       |       | IC3IS<1:0>   |      |      | —    | —    | —           | T3IP<2:0>    |      |             | T3IS<1:0>    |            | 0000 |  |
| 10D0                         | IPC4             | 31:16     | —     | —     | —     | INT4IP<2:0>  |       |       | INT4IS<1:0>  |      |      | —    | —    | —           | OC4IP<2:0>   |      |             | OC4IS<1:0>   |            | 0000 |  |
|                              |                  | 15:0      | —     | —     | —     | IC4IP<2:0>   |       |       | IC4IS<1:0>   |      |      | —    | —    | —           | T4IP<2:0>    |      |             | T4IS<1:0>    |            | 0000 |  |
| 10E0                         | IPC5             | 31:16     | —     | —     | —     | SPI1IP<2:0>  |       |       | SPI1IS<1:0>  |      |      | —    | —    | —           | OC5IP<2:0>   |      |             | OC5IS<1:0>   |            | 0000 |  |
|                              |                  | 15:0      | —     | —     | —     | IC5IP<2:0>   |       |       | IC5IS<1:0>   |      |      | —    | —    | —           | T5IP<2:0>    |      |             | T5IS<1:0>    |            | 0000 |  |
| 10F0                         | IPC6             | 31:16     | —     | —     | —     | AD1IP<2:0>   |       |       | AD1IS<1:0>   |      |      | —    | —    | —           | CNIP<2:0>    |      |             | CNIS<1:0>    |            | 0000 |  |
|                              |                  | 15:0      | —     | —     | —     | I2C1IP<2:0>  |       |       | I2C1IS<1:0>  |      |      | —    | —    | —           | U1AIP<2:0>   |      |             | U1AIS<1:0>   |            | 0000 |  |
|                              |                  |           |       |       |       |              |       |       |              |      |      |      |      |             | SPI1AIP<2:0> |      |             | SPI1AIS<1:0> |            |      |  |
|                              |                  |           |       |       |       |              |       |       |              |      |      |      |      |             | I2C1AIP<2:0> |      |             | I2C1AIS<1:0> |            |      |  |
| 1100                         | IPC7             | 31:16     | —     | —     | —     | U2AIP<2:0>   |       |       | U2AIS<1:0>   |      |      | —    | —    | —           | CMP2IP<2:0>  |      |             | CMP2IS<1:0>  |            | 0000 |  |
|                              |                  |           |       |       |       | SPI2AIP<2:0> |       |       | SPI2AIS<1:0> |      |      |      |      |             |              |      |             |              |            |      |  |
|                              |                  |           |       |       |       | I2C2AIP<2:0> |       |       | I2C2AIS<1:0> |      |      |      |      |             |              |      |             |              |            |      |  |
|                              |                  | 15:0      | —     | —     | —     | CMP1IP<2:0>  |       |       | CMP1IS<1:0>  |      |      | —    | —    | —           | PMPIP<2:0>   |      |             | PMPIS<1:0>   |            | 0000 |  |
| 1110                         | IPC8             | 31:16     | —     | —     | —     | RTCCIP<2:0>  |       |       | RTCCIS<1:0>  |      |      | —    | —    | —           | FSCMIP<2:0>  |      |             | FSCMIS<1:0>  |            | 0000 |  |
|                              |                  | 15:0      | —     | —     | —     | I2C2IP<2:0>  |       |       | I2C2IS<1:0>  |      |      | —    | —    | —           | U3AIP<2:0>   |      |             | U3AIS<1:0>   |            | 0000 |  |
|                              |                  |           |       |       |       |              |       |       |              |      |      |      |      |             | SPI3AIP<2:0> |      |             | SPI3AIS<1:0> |            |      |  |
|                              |                  |           |       |       |       |              |       |       |              |      |      |      |      |             | I2C3AIP<2:0> |      |             | I2C3AIS<1:0> |            |      |  |
| 1120                         | IPC9             | 31:16     | —     | —     | —     | DMA3IP<2:0>  |       |       | DMA3IS<1:0>  |      |      | —    | —    | —           | DMA2IP<2:0>  |      |             | DMA2IS<1:0>  |            | 0000 |  |
|                              |                  | 15:0      | —     | —     | —     | DMA1IP<2:0>  |       |       | DMA1IS<1:0>  |      |      | —    | —    | —           | DMA0IP<2:0>  |      |             | DMA0IS<1:0>  |            | 0000 |  |
| 1130                         | IPC10            | 31:16     | —     | —     | —     | DMA7IP<2:0>  |       |       | DMA7IS<1:0>  |      |      | —    | —    | —           | DMA6IP<2:0>  |      |             | DMA6IS<1:0>  |            | 0000 |  |
|                              |                  | 15:0      | —     | —     | —     | DMA5IP<2:0>  |       |       | DMA5IS<1:0>  |      |      | —    | —    | —           | DMA4IP<2:0>  |      |             | DMA4IS<1:0>  |            | 0000 |  |
| 1140                         | IPC11            | 31:16     | —     | —     | —     | —            | —     | —     | —            | —    | —    | —    | —    | CAN1IP<2:0> |              |      | CAN1IS<1:0> |              | 0000       |      |  |
|                              |                  | 15:0      | —     | —     | —     | USBIP<2:0>   |       |       | USBIS<1:0>   |      |      | —    | —    | —           | FCEIP<2:0>   |      |             | FCEIS<1:0>   |            | 0000 |  |
| 1150                         | IPC12            | 31:16     | —     | —     | —     | U3BIP<2:0>   |       |       | U3BIS<1:0>   |      |      | —    | —    | —           | U2BIP<2:0>   |      |             | U2BIS<1:0>   |            | 0000 |  |
|                              |                  | 15:0      | —     | —     | —     | U1BIP<2:0>   |       |       | U1BIS<1:0>   |      |      | —    | —    | —           | —            | —    | —           | —            | —          | 0000 |  |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-6: INTERRUPT REGISTER MAP FOR THE PIC32MX675F512L AND PIC32MX695F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits        |         |         |             |           |           |             |          |          |          |           |           |            |           |           |            | All Resets |        |       |       |      |      |
|-----------------------------|------------------|-----------|-------------|---------|---------|-------------|-----------|-----------|-------------|----------|----------|----------|-----------|-----------|------------|-----------|-----------|------------|------------|--------|-------|-------|------|------|
|                             |                  |           | 31/15       | 30/14   | 29/13   | 28/12       | 27/11     | 26/10     | 25/9        | 24/8     | 23/7     | 22/6     | 21/5      | 20/4      | 19/3       | 18/2      | 17/1      | 16/0       |            |        |       |       |      |      |
| 1000                        | INTCON           | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —        | —        | —         | —         | —          | —         | —         | SS0        | 0000       |        |       |       |      |      |
|                             |                  | 15:0      | —           | FRZ     | —       | MVEC        | —         | TRC<2:0>  |             |          | —        | —        | —         | INT4EP    | INT3EP     | INT2EP    | INT1EP    | INT0EP     | 0000       |        |       |       |      |      |
| 1010                        | INTSTAT          | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —        | —        | —         | —         | —          | —         | —         | —          | 0000       |        |       |       |      |      |
|                             |                  | 15:0      | —           | —       | —       | —           | —         | RIPL<2:0> |             |          | —        | —        | VEC<5:0>  |           |            |           |           |            | 0000       |        |       |       |      |      |
| 1020                        | IPTMR            | 31:16     | IPTMR<31:0> |         |         |             |           |           |             |          |          |          |           |           |            |           |           |            | 0000       |        |       |       |      |      |
|                             |                  | 15:0      |             |         |         |             |           |           |             |          |          |          |           |           |            |           |           |            | 0000       |        |       |       |      |      |
| 1030                        | IFS0             | 31:16     | I2C1MIF     | I2CSIF  | I2CBIF  | U1ATXIF     | U1ARXIF   | U1AEIF    | SPI1TXIF    | SPI1RXIF | SPI1EIF  | OC5IF    | IC5IF     | T5IF      | INT4IF     | OC4IF     | IC4IF     | T4IF       | 0000       |        |       |       |      |      |
|                             |                  |           |             |         |         | SPI1ATXIF   | SPI1ARXIF | SPI1AEIF  |             |          |          |          |           |           |            |           |           |            |            |        |       |       |      |      |
|                             |                  |           |             |         |         | I2C1AMIF    | I2C1ASIF  | I2C1ABIF  |             |          |          |          |           |           |            |           |           |            |            |        |       |       |      |      |
|                             |                  | 15:0      | INT3IF      | OC3IF   | IC3IF   | T3IF        | INT2IF    | OC2IF     | IC2IF       | T2IF     | INT1IF   | OC1IF    | IC1IF     | T1IF      | INT0IF     | CS1IF     | CS0IF     | CTIF       | 0000       |        |       |       |      |      |
| 1040                        | IFS1             | 31:16     | IC3EIF      | IC2EIF  | IC1EIF  | ETHIF       | —         | —         | USBIF       | FCEIF    | DMA7IF   | DMA6IF   | DMA5IF    | DMA4IF    | DMA3IF     | DMA2IF    | DMA1IF    | DMA0IF     | 0000       |        |       |       |      |      |
|                             |                  |           |             |         |         |             | 15:0      | RTCCIF    | FSCMIF      | I2C2MIF  | I2C2SIF  | I2C2BIF  | U3ATXIF   | U3ARXIF   | U3AEIF     | U2ATXIF   | U2ARXIF   | U2AEIF     | CMP2IF     | CMP1IF | PMPIF | AD1IF | CNIF | 0000 |
|                             |                  |           |             |         |         |             |           |           |             |          |          |          | SPI3ATXIF | SPI3ARXIF | SPI3AEIF   | SPI2ATXIF | SPI2ARXIF | SPI2AEIF   |            |        |       |       |      |      |
|                             |                  |           |             |         |         |             |           |           | I2C3AMIF    | I2C3ASIF | I2C3ASIF | I2C2AMIF | I2C2ASIF  | I2C2ABIF  |            |           |           |            |            |        |       |       |      |      |
| 1050                        | IFS2             | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —        | —        | —         | —         | —          | —         | —         | —          | 0000       |        |       |       |      |      |
|                             |                  | 15:0      | —           | —       | —       | —           | —         | U3BTXIF   | U3BRXIF     | U3BEIF   | U2BTXIF  | U2BRXIF  | U2BEIF    | U1BTXIF   | U1BRXIF    | U1BEIF    | PMPEIF    | IC5EIF     | IC4EIF     | 0000   |       |       |      |      |
| 1060                        | IEC0             | 31:16     | I2C1MIE     | I2C1SIE | I2C1BIE | U1ATXIE     | U1ARXIE   | U1AEIE    | SPI1TXIE    | SPI1RXIE | SPI1EIE  | OC5IE    | IC5IE     | T5IE      | INT4IE     | OC4IE     | IC4IE     | T4IE       | 0000       |        |       |       |      |      |
|                             |                  |           |             |         |         | SPI1ATXIE   | SPI1ARXIE | SPI1AEIE  |             |          |          |          |           |           |            |           |           |            |            |        |       |       |      |      |
|                             |                  |           |             |         |         | I2C1AMIE    | I2C1ASIE  | I2C1ABIE  |             |          |          |          |           |           |            |           |           |            |            |        |       |       |      |      |
|                             |                  | 15:0      | INT3IE      | OC3IE   | IC3IE   | T3IE        | INT2IE    | OC2IE     | IC2IE       | T2IE     | INT1IE   | OC1IE    | IC1IE     | T1IE      | INT0IE     | CS1IE     | CS0IE     | CTIE       | 0000       |        |       |       |      |      |
| 1070                        | IEC1             | 31:16     | IC3EIE      | IC2EIE  | IC1EIE  | ETHIE       | —         | —         | USBIE       | FCEIE    | DMA7IE   | DMA6IE   | DMA5IE    | DMA4IE    | DMA3IE     | DMA2IE    | DMA1IE    | DMA0IE     | 0000       |        |       |       |      |      |
|                             |                  |           |             |         |         |             | 15:0      | RTCCIE    | FSCMIE      | I2C2MIE  | I2C2SIE  | I2C2BIE  | U3ATXIE   | U3ARXIE   | U3AEIE     | U2ATXIE   | U2ARXIE   | U2AEIE     | CMP2IE     | CMP1IE | PMPIE | AD1IE | CNIE | 0000 |
|                             |                  |           |             |         |         |             |           |           |             |          |          |          | SPI3ATXIE | SPI3ARXIE | SPI3AEIE   | SPI2ATXIE | SPI2ARXIE | SPI2AEIE   |            |        |       |       |      |      |
|                             |                  |           |             |         |         |             |           |           | I2C3AMIE    | I2C3ASIE | I2C3ASIE | I2C2AMIE | I2C2ASIE  | I2C2ABIE  |            |           |           |            |            |        |       |       |      |      |
| 1080                        | IEC2             | 31:16     | —           | —       | —       | —           | —         | —         | —           | —        | —        | —        | —         | —         | —          | —         | —         | —          | 0000       |        |       |       |      |      |
|                             |                  | 15:0      | —           | —       | —       | —           | —         | U3BTXIE   | U3BRXIE     | U3BEIE   | U2BTXIE  | U2BRXIE  | U2BEIE    | U1BTXIE   | U1BRXIE    | U1BEIE    | PMPEIE    | IC5EIE     | IC4EIE     | 0000   |       |       |      |      |
| 1090                        | IPC0             | 31:16     | —           | —       | —       | INT0IP<2:0> |           |           | INT0IS<1:0> |          |          | —        | —         | —         | CS1IP<2:0> |           |           | CS1IS<1:0> | 0000       |        |       |       |      |      |
|                             |                  | 15:0      | —           | —       | —       | CS0IP<2:0>  |           |           | CS0IS<1:0>  |          |          | —        | —         | —         | CTIP<2:0>  |           |           | CTIS<1:0>  | 0000       |        |       |       |      |      |
| 10A0                        | IPC1             | 31:16     | —           | —       | —       | INT1IP<2:0> |           |           | INT1IS<1:0> |          |          | —        | —         | —         | OC1IP<2:0> |           |           | OC1IS<1:0> | 0000       |        |       |       |      |      |
|                             |                  | 15:0      | —           | —       | —       | IC1IP<2:0>  |           |           | IC1IS<1:0>  |          |          | —        | —         | —         | T1IP<2:0>  |           |           | T1IS<1:0>  | 0000       |        |       |       |      |      |
| 10B0                        | IPC2             | 31:16     | —           | —       | —       | INT2IP<2:0> |           |           | INT2IS<1:0> |          |          | —        | —         | —         | OC2IP<2:0> |           |           | OC2IS<1:0> | 0000       |        |       |       |      |      |
|                             |                  | 15:0      | —           | —       | —       | IC2IP<2:0>  |           |           | IC2IS<1:0>  |          |          | —        | —         | —         | T2IP<2:0>  |           |           | T2IS<1:0>  | 0000       |        |       |       |      |      |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-6: INTERRUPT REGISTER MAP FOR THE PIC32MX675F512L AND PIC32MX695F512L DEVICES<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits  |       |       |              |       |       |              |      |      |      |      |      |              |      |      |              | All Resets |      |  |
|-----------------------------|------------------|-----------|-------|-------|-------|--------------|-------|-------|--------------|------|------|------|------|------|--------------|------|------|--------------|------------|------|--|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12        | 27/11 | 26/10 | 25/9         | 24/8 | 23/7 | 22/6 | 21/5 | 20/4 | 19/3         | 18/2 | 17/1 | 16/0         |            |      |  |
| 10C0                        | IPC3             | 31:16     | —     | —     | —     | INT3IP<2:0>  |       |       | INT3IS<1:0>  |      |      | —    | —    | —    | OC3IP<2:0>   |      |      | OC3IS<1:0>   |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | IC3IP<2:0>   |       |       | IC3IS<1:0>   |      |      | —    | —    | —    | T3IP<2:0>    |      |      | T3IS<1:0>    |            | 0000 |  |
| 10D0                        | IPC4             | 31:16     | —     | —     | —     | INT4IP<2:0>  |       |       | INT4IS<1:0>  |      |      | —    | —    | —    | OC4IP<2:0>   |      |      | OC4IS<1:0>   |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | IC4IP<2:0>   |       |       | IC4IS<1:0>   |      |      | —    | —    | —    | T4IP<2:0>    |      |      | T4IS<1:0>    |            | 0000 |  |
| 10E0                        | IPC5             | 31:16     | —     | —     | —     | SPI1IP<2:0>  |       |       | SPI1IS<1:0>  |      |      | —    | —    | —    | OC5IP<2:0>   |      |      | OC5IS<1:0>   |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | IC5IP<2:0>   |       |       | IC5IS<1:0>   |      |      | —    | —    | —    | T5IP<2:0>    |      |      | T5IS<1:0>    |            | 0000 |  |
| 10F0                        | IPC6             | 31:16     | —     | —     | —     | AD1IP<2:0>   |       |       | AD1IS<1:0>   |      |      | —    | —    | —    | CNIP<2:0>    |      |      | CNIS<1:0>    |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | I2C1IP<2:0>  |       |       | I2C1IS<1:0>  |      |      | —    | —    | —    | U1AIP<2:0>   |      |      | U1AIS<1:0>   |            | 0000 |  |
|                             |                  |           |       |       |       |              |       |       |              |      |      |      |      |      | SPI1AIP<2:0> |      |      | SPI1AIS<1:0> |            |      |  |
|                             |                  |           |       |       |       |              |       |       |              |      |      |      |      |      | I2C1AIP<2:0> |      |      | I2C1AIS<1:0> |            |      |  |
| 1100                        | IPC7             | 31:16     | —     | —     | —     | U2AIP<2:0>   |       |       | U2AIS<1:0>   |      |      | —    | —    | —    | CMP2IP<2:0>  |      |      | CMP2IS<1:0>  |            | 0000 |  |
|                             |                  |           |       |       |       | SPI2AIP<2:0> |       |       | SPI2AIS<1:0> |      |      |      |      |      |              |      |      |              |            |      |  |
|                             |                  |           |       |       |       | I2C2AIP<2:0> |       |       | I2C2AIS<1:0> |      |      |      |      |      |              |      |      |              |            |      |  |
|                             |                  | 15:0      | —     | —     | —     | CMP1IP<2:0>  |       |       | CMP1IS<1:0>  |      |      | —    | —    | —    | PMPIP<2:0>   |      |      | PMPIS<1:0>   |            | 0000 |  |
| 1110                        | IPC8             | 31:16     | —     | —     | —     | RTCCIP<2:0>  |       |       | RTCCIS<1:0>  |      |      | —    | —    | —    | FSCMIP<2:0>  |      |      | FSCMIS<1:0>  |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | I2C2IP<2:0>  |       |       | I2C2IS<1:0>  |      |      | —    | —    | —    | U3AIP<2:0>   |      |      | U3AIS<1:0>   |            | 0000 |  |
|                             |                  |           |       |       |       |              |       |       |              |      |      |      |      |      | SPI3AIP<2:0> |      |      | SPI3AIS<1:0> |            |      |  |
|                             |                  |           |       |       |       |              |       |       |              |      |      |      |      |      | I2C3AIP<2:0> |      |      | I2C3AIS<1:0> |            |      |  |
| 1120                        | IPC9             | 31:16     | —     | —     | —     | DMA3IP<2:0>  |       |       | DMA3IS<1:0>  |      |      | —    | —    | —    | DMA2IP<2:0>  |      |      | DMA2IS<1:0>  |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | DMA1IP<2:0>  |       |       | DMA1IS<1:0>  |      |      | —    | —    | —    | DMA0IP<2:0>  |      |      | DMA0IS<1:0>  |            | 0000 |  |
| 1130                        | IPC10            | 31:16     | —     | —     | —     | DMA7IP<2:0>  |       |       | DMA7IS<1:0>  |      |      | —    | —    | —    | DMA6IP<2:0>  |      |      | DMA6IS<1:0>  |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | DMA5IP<2:0>  |       |       | DMA5IS<1:0>  |      |      | —    | —    | —    | DMA4IP<2:0>  |      |      | DMA4IS<1:0>  |            | 0000 |  |
| 1140                        | IPC11            | 31:16     | —     | —     | —     | —            | —     | —     | —            | —    | —    | —    | —    | —    | —            | —    | —    | —            | 0000       |      |  |
|                             |                  | 15:0      | —     | —     | —     | USBIP<2:0>   |       |       | USBIS<1:0>   |      |      | —    | —    | —    | FCEIP<2:0>   |      |      | FCEIS<1:0>   |            | 0000 |  |
| 1150                        | IPC12            | 31:16     | —     | —     | —     | U3BIP<2:0>   |       |       | U3BIS<1:0>   |      |      | —    | —    | —    | U2BIP<2:0>   |      |      | U2BIS<1:0>   |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | U1BIP<2:0>   |       |       | U1BIS<1:0>   |      |      | —    | —    | —    | ETHIP<2:0>   |      |      | ETHIS<1:0>   |            | 0000 |  |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-7: INTERRUPT REGISTER MAP FOR THE PIC32MX795F512L DEVICE<sup>(1)</sup>**

| Virtual Address<br>(BF88-#) | Register<br>Name | Bit Range | Bits        |         |         |                                  |                                  |                                |                       |                      |                       |                       |                      |         |            |        |        |            | All Resets |
|-----------------------------|------------------|-----------|-------------|---------|---------|----------------------------------|----------------------------------|--------------------------------|-----------------------|----------------------|-----------------------|-----------------------|----------------------|---------|------------|--------|--------|------------|------------|
|                             |                  |           | 31/15       | 30/14   | 29/13   | 28/12                            | 27/11                            | 26/10                          | 25/9                  | 24/8                 | 23/7                  | 22/6                  | 21/5                 | 20/4    | 19/3       | 18/2   | 17/1   | 16/0       |            |
| 1000                        | INTCON           | 31:16     | —           | —       | —       | —                                | —                                | —                              | —                     | —                    | —                     | —                     | —                    | —       | —          | —      | —      | SS0        | 0000       |
|                             |                  | 15:0      | —           | FRZ     | —       | MVEC                             | —                                | TRC<2:0>                       |                       |                      | —                     | —                     | —                    | INT4EP  | INT3EP     | INT2EP | INT1EP | INT0EP     | 0000       |
| 1010                        | INTSTAT          | 31:16     | —           | —       | —       | —                                | —                                | —                              | —                     | —                    | —                     | —                     | —                    | —       | —          | —      | —      | —          | 0000       |
|                             |                  | 15:0      | —           | —       | —       | —                                | —                                | RIPL<2:0>                      |                       |                      | —                     | —                     | VEC<5:0>             |         |            |        |        |            | 0000       |
| 1020                        | IPTMR            | 31:16     | IPTMR<31:0> |         |         |                                  |                                  |                                |                       |                      |                       |                       |                      |         |            |        |        |            | 0000       |
|                             |                  | 15:0      |             |         |         |                                  |                                  |                                |                       |                      |                       |                       |                      |         |            |        |        |            | 0000       |
| 1030                        | IFS0             | 31:16     | I2C1MIF     | I2CSIF  | I2CBIF  | U1ATXIF<br>SPI1ATXIF<br>I2C1AMIF | U1ARXIF<br>SPI1ARXIF<br>I2C1ASIF | U1AEIF<br>SPI1AEIF<br>I2C1ABIF | SPI1TXIF              | SPI1RXIF             | SPI1EIF               | OC5IF                 | IC5IF                | T5IF    | INT4IF     | OC4IF  | IC4IF  | T4IF       | 0000       |
|                             |                  | 15:0      | INT3IF      | OC3IF   | IC3IF   | T3IF                             | INT2IF                           | OC2IF                          | IC2IF                 | T2IF                 | INT1IF                | OC1IF                 | IC1IF                | T1IF    | INT0IF     | CS1IF  | CS0IF  | CTIF       | 0000       |
| 1040                        | IFS1             | 31:16     | IC3EIF      | IC2EIF  | IC1EIF  | ETHIF                            | CAN2IF                           | CAN1IF                         | USBIF                 | FCEIF                | DMA7IF                | DMA6IF                | DMA5IF               | DMA4IF  | DMA3IF     | DMA2IF | DMA1IF | DMA0IF     | 0000       |
|                             |                  | 15:0      | RTCCIF      | FSCMIF  | I2C2MIF | I2C2SIF                          | I2C2BIF                          | SPI3ATXIF<br>I2C3AMIF          | SPI3ARXIF<br>I2C3ASIF | SPI3AEIF<br>I2C3ASIF | SPI2ATXIF<br>I2C2AMIF | SPI2ARXIF<br>I2C2ASIF | SPI2AEIF<br>I2C2ABIF | CMP2IF  | CMP1IF     | PMPIF  | AD1IF  | CNIF       | 0000       |
| 1050                        | IFS2             | 31:16     | —           | —       | —       | —                                | —                                | —                              | —                     | —                    | —                     | —                     | —                    | —       | —          | —      | —      | —          | 0000       |
|                             |                  | 15:0      | —           | —       | —       | —                                | U3BTXIF                          | U3BRXIF                        | U3BEIF                | U2BTXIF              | U2BRXIF               | U2BEIF                | U1BTXIF              | U1BRXIF | U1BEIF     | PMPEIF | IC5EIF | IC4EIF     | 0000       |
| 1060                        | IEC0             | 31:16     | I2C1MIE     | I2C1SIE | I2C1BIE | U1ATXIE<br>SPI1ATXIE<br>I2C1AMIE | U1ARXIE<br>SPI1ARXIE<br>I2C1ASIE | U1AEIE<br>SPI1AEIE<br>I2C1ABIE | SPI1TXIE              | SPI1RXIE             | SPI1EIE               | OC5IE                 | IC5IE                | T5IE    | INT4IE     | OC4IE  | IC4IE  | T4IE       | 0000       |
|                             |                  | 15:0      | INT3IE      | OC3IE   | IC3IE   | T3IE                             | INT2IE                           | OC2IE                          | IC2IE                 | T2IE                 | INT1IE                | OC1IE                 | IC1IE                | T1IE    | INT0IE     | CS1IE  | CS0IE  | CTIE       | 0000       |
| 1070                        | IEC1             | 31:16     | IC3EIE      | IC2EIE  | IC1EIE  | ETHIE                            | CAN2IE                           | CAN1IE                         | USBIE                 | FCEIE                | DMA7IE                | DMA6IE                | DMA5IE               | DMA4IE  | DMA3IE     | DMA2IE | DMA1IE | DMA0IE     | 0000       |
|                             |                  | 15:0      | RTCCIE      | FSCMIE  | I2C2MIE | I2C2SIE                          | I2C2BIE                          | SPI3ATXIE<br>I2C3AMIE          | SPI3ARXIE<br>I2C3ASIE | SPI3AEIE<br>I2C3ASIE | SPI2ATXIE<br>I2C2AMIE | SPI2ARXIE<br>I2C2ASIE | SPI2AEIE<br>I2C2ABIE | CMP2IE  | CMP1IE     | PMPIE  | AD1IE  | CNIE       | 0000       |
| 1080                        | IEC2             | 31:16     | —           | —       | —       | —                                | —                                | —                              | —                     | —                    | —                     | —                     | —                    | —       | —          | —      | —      | —          | 0000       |
|                             |                  | 15:0      | —           | —       | —       | —                                | U3BTXIE                          | U3BRXIE                        | U3BEIE                | U2BTXIE              | U2BRXIE               | U2BEIE                | U1BTXIE              | U1BRXIE | U1BEIE     | PMPEIE | IC5EIE | IC4EIE     | 0000       |
| 1090                        | IPC0             | 31:16     | —           | —       | —       | INT0IP<2:0>                      |                                  |                                | INT0IS<1:0>           |                      |                       | —                     | —                    | —       | CS1IP<2:0> |        |        | CS1IS<1:0> | 0000       |
|                             |                  | 15:0      | —           | —       | —       | CS0IP<2:0>                       |                                  |                                | CS0IS<1:0>            |                      |                       | —                     | —                    | —       | CTIP<2:0>  |        |        | CTIS<1:0>  | 0000       |
| 10A0                        | IPC1             | 31:16     | —           | —       | —       | INT1IP<2:0>                      |                                  |                                | INT1IS<1:0>           |                      |                       | —                     | —                    | —       | OC1IP<2:0> |        |        | OC1IS<1:0> | 0000       |
|                             |                  | 15:0      | —           | —       | —       | IC1IP<2:0>                       |                                  |                                | IC1IS<1:0>            |                      |                       | —                     | —                    | —       | T1IP<2:0>  |        |        | T1IS<1:0>  | 0000       |
| 10B0                        | IPC2             | 31:16     | —           | —       | —       | INT2IP<2:0>                      |                                  |                                | INT2IS<1:0>           |                      |                       | —                     | —                    | —       | OC2IP<2:0> |        |        | OC2IS<1:0> | 0000       |
|                             |                  | 15:0      | —           | —       | —       | IC2IP<2:0>                       |                                  |                                | IC2IS<1:0>            |                      |                       | —                     | —                    | —       | T2IP<2:0>  |        |        | T2IS<1:0>  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-7: INTERRUPT REGISTER MAP FOR THE PIC32MX795F512L DEVICE<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits  |       |       |              |       |       |              |      |      |      |      |      |              |      |      |              | All Resets |      |  |
|-----------------------------|------------------|-----------|-------|-------|-------|--------------|-------|-------|--------------|------|------|------|------|------|--------------|------|------|--------------|------------|------|--|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12        | 27/11 | 26/10 | 25/9         | 24/8 | 23/7 | 22/6 | 21/5 | 20/4 | 19/3         | 18/2 | 17/1 | 16/0         |            |      |  |
| 10C0                        | IPC3             | 31:16     | —     | —     | —     | INT3IP<2:0>  |       |       | INT3IS<1:0>  |      |      | —    | —    | —    | OC3IP<2:0>   |      |      | OC3IS<1:0>   |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | IC3IP<2:0>   |       |       | IC3IS<1:0>   |      |      | —    | —    | —    | T3IP<2:0>    |      |      | T3IS<1:0>    |            | 0000 |  |
| 10D0                        | IPC4             | 31:16     | —     | —     | —     | INT4IP<2:0>  |       |       | INT4IS<1:0>  |      |      | —    | —    | —    | OC4IP<2:0>   |      |      | OC4IS<1:0>   |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | IC4IP<2:0>   |       |       | IC4IS<1:0>   |      |      | —    | —    | —    | T4IP<2:0>    |      |      | T4IS<1:0>    |            | 0000 |  |
| 10E0                        | IPC5             | 31:16     | —     | —     | —     | SPI1IP<2:0>  |       |       | SPI1IS<1:0>  |      |      | —    | —    | —    | OC5IP<2:0>   |      |      | OC5IS<1:0>   |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | IC5IP<2:0>   |       |       | IC5IS<1:0>   |      |      | —    | —    | —    | T5IP<2:0>    |      |      | T5IS<1:0>    |            | 0000 |  |
| 10F0                        | IPC6             | 31:16     | —     | —     | —     | AD1IP<2:0>   |       |       | AD1IS<1:0>   |      |      | —    | —    | —    | CNIP<2:0>    |      |      | CNIS<1:0>    |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | I2C1IP<2:0>  |       |       | I2C1IS<1:0>  |      |      | —    | —    | —    | U1AIP<2:0>   |      |      | U1AIS<1:0>   |            | 0000 |  |
|                             |                  |           |       |       |       |              |       |       |              |      |      |      |      |      | SPI1AIP<2:0> |      |      | SPI1AIS<1:0> |            |      |  |
|                             |                  |           |       |       |       |              |       |       |              |      |      |      |      |      | I2C1AIP<2:0> |      |      | I2C1AIS<1:0> |            |      |  |
| 1100                        | IPC7             | 31:16     | —     | —     | —     | U2AIP<2:0>   |       |       | U2AIS<1:0>   |      |      | —    | —    | —    | CMP2IP<2:0>  |      |      | CMP2IS<1:0>  |            | 0000 |  |
|                             |                  |           |       |       |       | SPI2AIP<2:0> |       |       | SPI2AIS<1:0> |      |      |      |      |      |              |      |      |              |            |      |  |
|                             |                  |           |       |       |       | I2C2AIP<2:0> |       |       | I2C2AIS<1:0> |      |      |      |      |      |              |      |      |              |            |      |  |
|                             |                  | 15:0      | —     | —     | —     | CMP1IP<2:0>  |       |       | CMP1IS<1:0>  |      |      | —    | —    | —    | PMPIP<2:0>   |      |      | PMPIS<1:0>   |            | 0000 |  |
| 1110                        | IPC8             | 31:16     | —     | —     | —     | RTCCIP<2:0>  |       |       | RTCCIS<1:0>  |      |      | —    | —    | —    | FSCMIP<2:0>  |      |      | FSCMIS<1:0>  |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | I2C2IP<2:0>  |       |       | I2C2IS<1:0>  |      |      | —    | —    | —    | U3AIP<2:0>   |      |      | U3AIS<1:0>   |            | 0000 |  |
|                             |                  |           |       |       |       |              |       |       |              |      |      |      |      |      | SPI3AIP<2:0> |      |      | SPI3AIS<1:0> |            |      |  |
|                             |                  |           |       |       |       |              |       |       |              |      |      |      |      |      | I2C3AIP<2:0> |      |      | I2C3AIS<1:0> |            |      |  |
| 1120                        | IPC9             | 31:16     | —     | —     | —     | DMA3IP<2:0>  |       |       | DMA3IS<1:0>  |      |      | —    | —    | —    | DMA2IP<2:0>  |      |      | DMA2IS<1:0>  |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | DMA1IP<2:0>  |       |       | DMA1IS<1:0>  |      |      | —    | —    | —    | DMA0IP<2:0>  |      |      | DMA0IS<1:0>  |            | 0000 |  |
| 1130                        | IPC10            | 31:16     | —     | —     | —     | DMA7IP<2:0>  |       |       | DMA7IS<1:0>  |      |      | —    | —    | —    | DMA6IP<2:0>  |      |      | DMA6IS<1:0>  |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | DMA5IP<2:0>  |       |       | DMA5IS<1:0>  |      |      | —    | —    | —    | DMA4IP<2:0>  |      |      | DMA4IS<1:0>  |            | 0000 |  |
| 1140                        | IPC11            | 31:16     | —     | —     | —     | CAN2IP<2:0>  |       |       | CAN2IS<1:0>  |      |      | —    | —    | —    | CAN1IP<2:0>  |      |      | CAN1IS<1:0>  |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | USBIP<2:0>   |       |       | USBIS<1:0>   |      |      | —    | —    | —    | FCEIP<2:0>   |      |      | FCEIS<1:0>   |            | 0000 |  |
| 1150                        | IPC12            | 31:16     | —     | —     | —     | U3BIP<2:0>   |       |       | U3BIS<1:0>   |      |      | —    | —    | —    | U2BIP<2:0>   |      |      | U2BIS<1:0>   |            | 0000 |  |
|                             |                  | 15:0      | —     | —     | —     | U1BIP<2:0>   |       |       | U1BIS<1:0>   |      |      | —    | —    | —    | ETHIP<2:0>   |      |      | ETHIS<1:0>   |            | 0000 |  |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-8: TIMER1-TIMER5 REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF80 #) | Register<br>Name | Bit Range | Bits       |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | All Resets |
|-----------------------------|------------------|-----------|------------|-------|-------|-------|-------|-------|------|------|-------|------------|------------|------|------|-------|------|------|------------|
|                             |                  |           | 31/15      | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7  | 22/6       | 21/5       | 20/4 | 19/3 | 18/2  | 17/1 | 16/0 |            |
| 0600                        | T1CON            | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | ON         | FRZ   | SIDL  | TWDIS | TWIP  | —     | —    | —    | TGATE | —          | TCKPS<1:0> |      | —    | TSYNC | TCS  | —    | 0000       |
| 0610                        | TMR1             | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | TMR1<15:0> |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | 0000       |
| 0620                        | PR1              | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | PR1<15:0>  |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | FFFF       |
| 0800                        | T2CON            | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | ON         | FRZ   | SIDL  | —     | —     | —     | —    | —    | TGATE | TCKPS<2:0> |            | —    | T32  | —     | TCS  | —    | 0000       |
| 0810                        | TMR2             | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | TMR2<15:0> |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | 0000       |
| 0820                        | PR2              | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | PR2<15:0>  |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | FFFF       |
| 0A00                        | T3CON            | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | ON         | FRZ   | SIDL  | —     | —     | —     | —    | —    | TGATE | TCKPS<2:0> |            | —    | —    | —     | TCS  | —    | 0000       |
| 0A10                        | TMR3             | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | TMR3<15:0> |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | 0000       |
| 0A20                        | PR3              | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | PR3<15:0>  |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | FFFF       |
| 0C00                        | T4CON            | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | ON         | FRZ   | SIDL  | —     | —     | —     | —    | —    | TGATE | TCKPS<2:0> |            | —    | T32  | —     | TCS  | —    | 0000       |
| 0C10                        | TMR4             | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | TMR4<15:0> |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | 0000       |
| 0C20                        | PR4              | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | PR4<15:0>  |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | FFFF       |
| 0E00                        | T5CON            | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | ON         | FRZ   | SIDL  | —     | —     | —     | —    | —    | TGATE | TCKPS<2:0> |            | —    | —    | —     | TCS  | —    | 0000       |
| 0E10                        | TMR5             | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | TMR5<15:0> |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | 0000       |
| 0E20                        | PR5              | 31:16     | —          | —     | —     | —     | —     | —     | —    | —    | —     | —          | —          | —    | —    | —     | —    | —    | 0000       |
|                             |                  | 15:0      | PR5<15:0>  |       |       |       |       |       |      |      |       |            |            |      |      |       |      |      | FFFF       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-9: INPUT CAPTURE1-INPUT CAPTURE5 REGISTER MAP**

| Virtual Address<br>(BF80_#) | Register<br>Name      | Bit Range | Bits         |       |       |       |       |       |         |       |       |          |      |      |       |          |      | All Resets |
|-----------------------------|-----------------------|-----------|--------------|-------|-------|-------|-------|-------|---------|-------|-------|----------|------|------|-------|----------|------|------------|
|                             |                       |           | 31/15        | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9    | 24/8  | 23/7  | 22/6     | 21/5 | 20/4 | 19/3  | 18/2     | 17/1 |            |
| 2000                        | IC1CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —       | —     | —     | —        | —    | —    | —     | —        | —    | 0000       |
|                             |                       | 15:0      | ON           | FRZ   | SIDL  | —     | —     | —     | ICFEDGE | ICC32 | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      | 0000       |
| 2010                        | IC1BUF                | 31:16     | IC1BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |
|                             |                       | 15:0      | IC1BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |
| 2200                        | IC2CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —       | —     | —     | —        | —    | —    | —     | —        | —    | 0000       |
|                             |                       | 15:0      | ON           | FRZ   | SIDL  | —     | —     | —     | ICFEDGE | ICC32 | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      | 0000       |
| 2210                        | IC2BUF                | 31:16     | IC2BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |
|                             |                       | 15:0      | IC2BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |
| 2400                        | IC3CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —       | —     | —     | —        | —    | —    | —     | —        | —    | 0000       |
|                             |                       | 15:0      | ON           | FRZ   | SIDL  | —     | —     | —     | ICFEDGE | ICC32 | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      | 0000       |
| 2410                        | IC3BUF                | 31:16     | IC3BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |
|                             |                       | 15:0      | IC3BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |
| 2600                        | IC4CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —       | —     | —     | —        | —    | —    | —     | —        | —    | 0000       |
|                             |                       | 15:0      | ON           | FRZ   | SIDL  | —     | —     | —     | ICFEDGE | ICC32 | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      | 0000       |
| 2610                        | IC4BUF                | 31:16     | IC4BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |
|                             |                       | 15:0      | IC4BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |
| 2800                        | IC5CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —       | —     | —     | —        | —    | —    | —     | —        | —    | 0000       |
|                             |                       | 15:0      | ON           | FRZ   | SIDL  | —     | —     | —     | ICFEDGE | ICC32 | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      | 0000       |
| 2810                        | IC5BUF                | 31:16     | IC5BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |
|                             |                       | 15:0      | IC5BUF<31:0> |       |       |       |       |       |         |       |       |          |      |      |       |          |      | xxxx       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** This register has corresponding CLR, SET, and INV Registers at its virtual address, plus an offset of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-10: OUTPUT COMPARE 1-OUTPUT COMPARE 5 REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits        |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | All Resets |
|-----------------------------|------------------|-----------|-------------|-------|-------|-------|-------|-------|------|------|------|------|------|-------|--------|----------|------|------|------------|
|                             |                  |           | 31/15       | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4  | 19/3   | 18/2     | 17/1 | 16/0 |            |
| 3000                        | OC1CON           | 31:16     | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000       |
|                             |                  | 15:0      | ON          | FRZ   | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000       |
| 3010                        | OC1R             | 31:16     | OC1R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
| 3020                        | OC1RS            | 31:16     | OC1RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
| 3200                        | OC2CON           | 31:16     | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000       |
|                             |                  | 15:0      | ON          | FRZ   | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000       |
| 3210                        | OC2R             | 31:16     | OC2R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
| 3220                        | OC2RS            | 31:16     | OC2RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
| 3400                        | OC3CON           | 31:16     | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000       |
|                             |                  | 15:0      | ON          | FRZ   | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000       |
| 3410                        | OC3R             | 31:16     | OC3R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
| 3420                        | OC3RS            | 31:16     | OC3RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
| 3600                        | OC4CON           | 31:16     | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000       |
|                             |                  | 15:0      | ON          | FRZ   | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000       |
| 3610                        | OC4R             | 31:16     | OC4R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
| 3620                        | OC4RS            | 31:16     | OC4RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
| 3800                        | OC5CON           | 31:16     | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000       |
|                             |                  | 15:0      | ON          | FRZ   | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000       |
| 3810                        | OC5R             | 31:16     | OC5R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
| 3820                        | OC5RS            | 31:16     | OC5RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |
|                             |                  | 15:0      |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | xxxx       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-11: I2C1, I2C1A, I2C2A, AND I2C3A REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit<br>Range | Bits    |        |       |        |               |       |          |                |       |       |       |       |      |      |      |      | All Resets |
|-----------------------------|------------------|--------------|---------|--------|-------|--------|---------------|-------|----------|----------------|-------|-------|-------|-------|------|------|------|------|------------|
|                             |                  |              | 31/15   | 30/14  | 29/13 | 28/12  | 27/11         | 26/10 | 25/9     | 24/8           | 23/7  | 22/6  | 21/5  | 20/4  | 19/3 | 18/2 | 17/1 | 16/0 |            |
| 5000                        | I2C1ACON         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | ON      | FRZ    | SIDL  | SCLREL | STRICT        | A10M  | DISSLW   | SMEN           | GCEN  | STREN | ACKDT | ACKEN | RCEN | PEN  | RSEN | SEN  | 0000       |
| 5010                        | I2C1ASTAT        | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | ACKSTAT | TRSTAT | —     | —      | —             | BCL   | GCSTAT   | ADD10          | IWCOL | I2COV | D/A   | P     | S    | R/W  | RBF  | TBF  | 0000       |
| 5020                        | I2C1AADD         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | —             | —     | ADD<9:0> |                |       |       |       |       |      |      |      |      | 0000       |
| 5030                        | I2C1AMSK         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | —             | —     | MSK<9:0> |                |       |       |       |       |      |      |      |      | 0000       |
| 5040                        | I2C1ABRG         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | I2C1BRG<11:0> |       |          |                |       |       |       |       |      |      |      |      | 0000       |
| 5050                        | I2C1ATRN         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | —             | —     | —        | I2CT1DATA<7:0> |       |       |       |       |      |      |      |      | 0000       |
| 5060                        | I2C1ARCV         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | —             | —     | —        | I2CR1DATA<7:0> |       |       |       |       |      |      |      |      | 0000       |
| 5100                        | I2C2ACON         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | ON      | FRZ    | SIDL  | SCLREL | STRICT        | A10M  | DISSLW   | SMEN           | GCEN  | STREN | ACKDT | ACKEN | RCEN | PEN  | RSEN | SEN  | 0000       |
| 5110                        | I2C2ASTAT        | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | ACKSTAT | TRSTAT | —     | —      | —             | BCL   | GCSTAT   | ADD10          | IWCOL | I2COV | D/A   | P     | S    | R/W  | RBF  | TBF  | 0000       |
| 5120                        | I2C2AADD         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | —             | —     | ADD<9:0> |                |       |       |       |       |      |      |      |      | 0000       |
| 5130                        | I2C2AMSK         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | —             | —     | MSK<9:0> |                |       |       |       |       |      |      |      |      | 0000       |
| 5140                        | I2C2ABRG         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | I2C1BRG<11:0> |       |          |                |       |       |       |       |      |      |      |      | 0000       |
| 5150                        | I2C2ATRN         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | —             | —     | —        | I2CT1DATA<7:0> |       |       |       |       |      |      |      |      | 0000       |
| 5160                        | I2C2ARCV         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | —       | —      | —     | —      | —             | —     | —        | I2CR1DATA<7:0> |       |       |       |       |      |      |      |      | 0000       |
| 5200                        | I2C3ACON         | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | ON      | FRZ    | SIDL  | SCLREL | STRICT        | A10M  | DISSLW   | SMEN           | GCEN  | STREN | ACKDT | ACKEN | RCEN | PEN  | RSEN | SEN  | 0000       |
| 5210                        | I2C3ASTAT        | 31:16        | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0         | ACKSTAT | TRSTAT | —     | —      | —             | BCL   | GCSTAT   | ADD10          | IWCOL | I2COV | D/A   | P     | S    | R/W  | RBF  | TBF  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table except I2CxRCV have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-11: I2C1, I2C1A, I2C2A, AND I2C3A REGISTER MAP<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits    |        |       |        |        |       |               |       |                |       |       |       |      |      |      |      | All Resets |
|-----------------------------|------------------|-----------|---------|--------|-------|--------|--------|-------|---------------|-------|----------------|-------|-------|-------|------|------|------|------|------------|
|                             |                  |           | 31/15   | 30/14  | 29/13 | 28/12  | 27/11  | 26/10 | 25/9          | 24/8  | 23/7           | 22/6  | 21/5  | 20/4  | 19/3 | 18/2 | 17/1 | 16/0 |            |
| 5220                        | I2C3AADD         | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | ADD<9:0>      |       |                |       |       |       |      |      |      |      | 0000       |
| 5230                        | I2C3AMSK         | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | MSK<9:0>      |       |                |       |       |       |      |      |      |      | 0000       |
| 5240                        | I2C3ABRG         | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | I2C1BRG<11:0> |       |                |       |       |       |      |      |      |      | 0000       |
| 5250                        | I2C3ATRNB        | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | —             | —     | I2CT1DATA<7:0> |       |       |       |      |      |      |      | 0000       |
| 5260                        | I2C3ARCV         | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | —             | —     | I2CR1DATA<7:0> |       |       |       |      |      |      |      | 0000       |
| 5300                        | I2C1CON          | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | ON      | FRZ    | SIDL  | SCLREL | STRICT | A10M  | DISSLW        | SMEN  | GCEN           | STREN | ACKDT | ACKEN | RCEN | PEN  | RSEN | SEN  | 0000       |
| 5310                        | I2C1STAT         | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | ACKSTAT | TRSTAT | —     | —      | —      | BCL   | GCSTAT        | ADD10 | IWCOL          | I2COV | D/A   | P     | S    | R/W  | RBF  | TBF  | 0000       |
| 5320                        | I2C1ADD          | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | ADD<9:0>      |       |                |       |       |       |      |      |      |      | 0000       |
| 5330                        | I2C1MSK          | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | MSK<9:0>      |       |                |       |       |       |      |      |      |      | 0000       |
| 5340                        | I2C1BRG          | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | I2C1BRG<11:0> |       |                |       |       |       |      |      |      |      | 0000       |
| 5350                        | I2C1TRNB         | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | —             | —     | I2CT1DATA<7:0> |       |       |       |      |      |      |      | 0000       |
| 5360                        | I2C1RCV          | 31:16     | —       | —      | —     | —      | —      | —     | —             | —     | —              | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —      | —     | —             | —     | I2CR1DATA<7:0> |       |       |       |      |      |      |      | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table except I2CxRCV have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-12: I2C2 REGISTER MAP FOR PIC32MX575F512L, PIC32MX575F256L, PIC32MX675F512L, PIC32MX695F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits    |        |       |        |               |       |          |                |       |       |       |       |      |      |      |      | All Resets |
|-----------------------------|------------------|-----------|---------|--------|-------|--------|---------------|-------|----------|----------------|-------|-------|-------|-------|------|------|------|------|------------|
|                             |                  |           | 31/15   | 30/14  | 29/13 | 28/12  | 27/11         | 26/10 | 25/9     | 24/8           | 23/7  | 22/6  | 21/5  | 20/4  | 19/3 | 18/2 | 17/1 | 16/0 |            |
| 5400                        | I2C2CON          | 31:16     | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | ON      | FRZ    | SIDL  | SCLREL | STRICT        | A10M  | DISSLW   | SMEN           | GCEN  | STREN | ACKDT | ACKEN | RCEN | PEN  | RSEN | SEN  | 0000       |
| 5410                        | I2C2STAT         | 31:16     | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | ACKSTAT | TRSTAT | —     | —      | —             | BCL   | GCSTAT   | ADD10          | IWCOL | I2COV | D/A   | P     | S    | R/W  | RBF  | TBF  | 0000       |
| 5420                        | I2C2ADD          | 31:16     | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —             | —     | ADD<9:0> |                |       |       |       |       |      |      |      |      | 0000       |
| 5430                        | I2C2MSK          | 31:16     | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —             | —     | MSK<9:0> |                |       |       |       |       |      |      |      |      | 0000       |
| 5440                        | I2C2BRG          | 31:16     | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | I2C2BRG<11:0> |       |          |                |       |       |       |       |      |      |      |      | 0000       |
| 5450                        | I2C2TRN          | 31:16     | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —             | —     | —        | I2CT1DATA<7:0> |       |       |       |       |      |      |      |      | 0000       |
| 5460                        | I2C2RCV          | 31:16     | —       | —      | —     | —      | —             | —     | —        | —              | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | —       | —      | —     | —      | —             | —     | —        | I2CR1DATA<7:0> |       |       |       |       |      |      |      |      | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table except I2CxRCV have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-13: UART1A, UART1B, UART2A, UART2B, UART3A, AND UART3B REGISTER MAP**

| Virtual Address<br>(BF80_#) | Register<br>Name       | Bit Range | Bits         |       |        |       |        |       |          |        |                   |        |       |       |      |            |      |       | All Resets |
|-----------------------------|------------------------|-----------|--------------|-------|--------|-------|--------|-------|----------|--------|-------------------|--------|-------|-------|------|------------|------|-------|------------|
|                             |                        |           | 31/15        | 30/14 | 29/13  | 28/12 | 27/11  | 26/10 | 25/9     | 24/8   | 23/7              | 22/6   | 21/5  | 20/4  | 19/3 | 18/2       | 17/1 | 16/0  |            |
| 6000                        | U1AMODE <sup>(1)</sup> | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | ON           | FRZ   | SIDL   | IREN  | RTSMD  | —     | UEN<1:0> |        | WAKE              | LPBACK | ABAUD | RXINV | BRGH | PDSEL<1:0> |      | STSEL | 0000       |
| 6010                        | U1ASTA <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | ADM_EN | ADDR<7:0>         |        |       |       |      |            |      |       | 0000       |
|                             |                        | 15:0      | UTXISEL<1:0> |       | UTXINV | URXEN | UTXBRK | UTXEN | UTXBF    | TRMT   | URXISEL<1:0>      |        | ADDEN | RIDLE | PERR | FERR       | OERR | URXDA | 0110       |
| 6020                        | U1ATXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | TX8    | Transmit Register |        |       |       |      |            |      |       | 0000       |
| 6030                        | U1ARXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | RX8    | Receive Register  |        |       |       |      |            |      |       | 0000       |
| 6040                        | U1ABRG <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | BRG<15:0>    |       |        |       |        |       |          |        |                   |        |       |       |      |            |      |       | 0000       |
| 6200                        | U1BMODE <sup>(1)</sup> | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | ON           | FRZ   | SIDL   | IREN  | —      | —     | —        | —      | WAKE              | LPBACK | ABAUD | RXINV | BRGH | PDSEL<1:0> |      | STSEL | 0000       |
| 6210                        | U1BSTA <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | ADM_EN | ADDR<7:0>         |        |       |       |      |            |      |       | 0000       |
|                             |                        | 15:0      | UTXISEL<1:0> |       | UTXINV | URXEN | UTXBRK | UTXEN | UTXBF    | TRMT   | URXISEL<1:0>      |        | ADDEN | RIDLE | PERR | FERR       | OERR | URXDA | 0110       |
| 6220                        | U1BTXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | TX8    | Transmit Register |        |       |       |      |            |      |       | 0000       |
| 6230                        | U1BRXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | RX8    | Receive Register  |        |       |       |      |            |      |       | 0000       |
| 6240                        | U1BBRG <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | BRG<15:0>    |       |        |       |        |       |          |        |                   |        |       |       |      |            |      |       | 0000       |
| 6400                        | U2AMODE <sup>(1)</sup> | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | ON           | FRZ   | SIDL   | IREN  | RTSMD  | —     | UEN<1:0> |        | WAKE              | LPBACK | ABAUD | RXINV | BRGH | PDSEL<1:0> |      | STSEL | 0000       |
| 6410                        | U2ASTA <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | ADM_EN | ADDR<7:0>         |        |       |       |      |            |      |       | 0000       |
|                             |                        | 15:0      | UTXISEL<1:0> |       | UTXINV | URXEN | UTXBRK | UTXEN | UTXBF    | TRMT   | URXISEL<1:0>      |        | ADDEN | RIDLE | PERR | FERR       | OERR | URXDA | 0110       |
| 6420                        | U2ATXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | TX8    | Transmit Register |        |       |       |      |            |      |       | 0000       |
| 6430                        | U2ARXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | RX8    | Receive Register  |        |       |       |      |            |      |       | 0000       |
| 6440                        | U2ABRG <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | BRG<15:0>    |       |        |       |        |       |          |        |                   |        |       |       |      |            |      |       | 0000       |
| 6600                        | U2BMODE <sup>(1)</sup> | 31:16     | —            | —     | —      | —     | —      | —     | —        | —      | —                 | —      | —     | —     | —    | —          | —    | 0000  |            |
|                             |                        | 15:0      | ON           | FRZ   | SIDL   | IREN  | —      | —     | —        | —      | WAKE              | LPBACK | ABAUD | RXINV | BRGH | PDSEL<1:0> |      | STSEL | 0000       |
| 6610                        | U2BSTA <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | ADM_EN | ADDR<7:0>         |        |       |       |      |            |      |       | 0000       |
|                             |                        | 15:0      | UTXISEL<1:0> |       | UTXINV | URXEN | UTXBRK | UTXEN | UTXBF    | TRMT   | URXISEL<1:0>      |        | ADDEN | RIDLE | PERR | FERR       | OERR | URXDA | 0110       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** This register has corresponding CLR, SET, and INV Registers at its virtual address, plus an offset of 0x4, 0x8, and 0xC, respectively. See Section 12.1.1 "CLR, SET and INV Registers" for more information.

**TABLE 4-13: UART1A, UART1B, UART2A, UART2B, UART3A, AND UART3B REGISTER MAP (CONTINUED)**

| Virtual Address<br>(BF80_#) | Register<br>Name       | Bit Range | Bits         |       |        |       |        |       |          |      |                   |                   |                   |                  |       |            |            | All Resets |       |
|-----------------------------|------------------------|-----------|--------------|-------|--------|-------|--------|-------|----------|------|-------------------|-------------------|-------------------|------------------|-------|------------|------------|------------|-------|
|                             |                        |           | 31/15        | 30/14 | 29/13  | 28/12 | 27/11  | 26/10 | 25/9     | 24/8 | 23/7              | 22/6              | 21/5              | 20/4             | 19/3  | 18/2       | 17/1       |            | 16/0  |
| 6620                        | U2BTXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | TX8  | Transmit Register |                   |                   |                  |       |            |            |            | 0000  |
| 6630                        | U2BRXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | —    | RX8               | Receive Register  |                   |                  |       |            |            |            | 0000  |
| 6640                        | U2BBRG <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | BRG<15:0>    |       |        |       |        |       |          |      |                   |                   |                   |                  |       |            |            | 0000       |       |
| 6800                        | U3AMODE <sup>(1)</sup> | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | ON           | FRZ   | SIDL   | IREN  | RTSMO  | —     | UEN<1:0> |      | WAKE              | LPBACK            | ABAUD             | RXINV            | BRGH  | PDSEL<1:0> |            | STSEL      | 0000  |
| 6810                        | U3ASTA <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | ADM_EN            | ADDR<7:0>         |                   |                  |       |            |            |            | 0000  |
|                             |                        | 15:0      | UTXISEL<1:0> |       | UTXINV | URXEN | UTXBRK | UTXEN | UTXBF    | TRMT | URXISEL<1:0>      |                   | ADDEN             | RIDLE            | PERR  | FERR       | OERR       | URXDA      | 0110  |
| 6820                        | U3ATXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | —    | TX8               | Transmit Register |                   |                  |       |            |            |            | 0000  |
| 6830                        | U3ARXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | —    | —                 | RX8               | Receive Register  |                  |       |            |            |            | 0000  |
| 6840                        | U3ABRG <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | BRG<15:0>    |       |        |       |        |       |          |      |                   |                   |                   |                  |       |            |            | 0000       |       |
| 6A00                        | U3BMODE <sup>(1)</sup> | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | ON           | FRZ   | SIDL   | IREN  | —      | —     | —        | —    | —                 | WAKE              | LPBACK            | ABAUD            | RXINV | BRGH       | PDSEL<1:0> |            | STSEL |
| 6A10                        | U3BSTA <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | ADDR<7:0>         |                  |       |            |            |            | 0000  |
|                             |                        | 15:0      | UTXISEL<1:0> |       | UTXINV | URXEN | UTXBRK | UTXEN | UTXBF    | TRMT | URXISEL<1:0>      |                   | ADDEN             | RIDLE            | PERR  | FERR       | OERR       | URXDA      | 0110  |
| 6A20                        | U3BTXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | —    | —                 | TX8               | Transmit Register |                  |       |            |            |            | 0000  |
| 6A30                        | U3BRXREG               | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | RX8               | Receive Register |       |            |            |            | 0000  |
| 6A40                        | U3BBRG <sup>(1)</sup>  | 31:16     | —            | —     | —      | —     | —      | —     | —        | —    | —                 | —                 | —                 | —                | —     | —          | —          | 0000       |       |
|                             |                        | 15:0      | BRG<15:0>    |       |        |       |        |       |          |      |                   |                   |                   |                  |       |            |            | 0000       |       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** This register has corresponding CLR, SET, and INV Registers at its virtual address, plus an offset of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-14: SPI1A, SPI2A, AND SPI3A REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits       |         |        |               |         |             |      |          |      |        |        |               |              |      |              |        | All Resets |
|-----------------------------|------------------|-----------|------------|---------|--------|---------------|---------|-------------|------|----------|------|--------|--------|---------------|--------------|------|--------------|--------|------------|
|                             |                  |           | 31/15      | 30/14   | 29/13  | 28/12         | 27/11   | 26/10       | 25/9 | 24/8     | 23/7 | 22/6   | 21/5   | 20/4          | 19/3         | 18/2 | 17/1         | 16/0   |            |
| 5800                        | SPI1ACON         | 31:16     | FRMEN      | FRMSYNC | FRMPOL | MSEN          | FRMSYPW | FRMCNT<2:0> |      |          | —    | —      | —      | —             | —            | —    | SPIFE        | ENHBUF | 0000       |
|                             |                  | 15:0      | ON         | FRZ     | SIDL   | DISSDO        | MODE32  | MODE16      | SMP  | CKE      | SSEN | CKP    | MSTEN  | —             | STXISEL<1:0> |      | SRXISEL<1:0> |        | 0000       |
| 5810                        | SPI1ASTAT        | 31:16     | —          | —       | —      | RXBUFELM<4:0> |         |             |      |          | —    | —      | —      | TXBUFELM<4:0> |              |      |              |        | 0000       |
|                             |                  | 15:0      | —          | —       | —      | —             | SPIBUSY | —           | —    | SPITUR   | SRMT | SPIROV | SPIRBE | —             | SPITBE       | —    | SPITBF       | SPIRBF | 0000       |
| 5820                        | SPI1ABUF         | 31:16     | DATA<31:0> |         |        |               |         |             |      |          |      |        |        |               |              |      |              |        | 0000       |
|                             |                  | 15:0      | DATA<31:0> |         |        |               |         |             |      |          |      |        |        |               |              |      |              |        | 0000       |
| 5830                        | SPI1ABRG         | 31:16     | —          | —       | —      | —             | —       | —           | —    | —        | —    | —      | —      | —             | —            | —    | —            | —      | 0000       |
|                             |                  | 15:0      | —          | —       | —      | —             | —       | —           | —    | BRG<8:0> |      |        |        |               |              |      |              |        |            |
| 5A00                        | SPI2ACON         | 31:16     | FRMEN      | FRMSYNC | FRMPOL | MSEN          | FRMSYPW | FRMCNT<2:0> |      |          | —    | —      | —      | —             | —            | —    | SPIFE        | ENHBUF | 0000       |
|                             |                  | 15:0      | ON         | FRZ     | SIDL   | DISSDO        | MODE32  | MODE16      | SMP  | CKE      | SSEN | CKP    | MSTEN  | —             | STXISEL<1:0> |      | SRXISEL<1:0> |        | 0000       |
| 5A10                        | SPI2ASTAT        | 31:16     | —          | —       | —      | RXBUFELM<4:0> |         |             |      |          | —    | —      | —      | TXBUFELM<4:0> |              |      |              |        | 0000       |
|                             |                  | 15:0      | —          | —       | —      | —             | SPIBUSY | —           | —    | SPITUR   | SRMT | SPIROV | SPIRBE | —             | SPITBE       | —    | SPITBF       | SPIRBF | 0000       |
| 5A20                        | SPI2ABUF         | 31:16     | DATA<31:0> |         |        |               |         |             |      |          |      |        |        |               |              |      |              |        | 0000       |
|                             |                  | 15:0      | DATA<31:0> |         |        |               |         |             |      |          |      |        |        |               |              |      |              |        | 0000       |
| 5A30                        | SPI2ABRG         | 31:16     | —          | —       | —      | —             | —       | —           | —    | —        | —    | —      | —      | —             | —            | —    | —            | —      | 0000       |
|                             |                  | 15:0      | —          | —       | —      | —             | —       | —           | —    | BRG<8:0> |      |        |        |               |              |      |              |        |            |
| 5C00                        | SPI3ACON         | 31:16     | FRMEN      | FRMSYNC | FRMPOL | MSEN          | FRMSYPW | FRMCNT<2:0> |      |          | —    | —      | —      | —             | —            | —    | SPIFE        | ENHBUF | 0000       |
|                             |                  | 15:0      | ON         | FRZ     | SIDL   | DISSDO        | MODE32  | MODE16      | SMP  | CKE      | SSEN | CKP    | MSTEN  | —             | STXISEL<1:0> |      | SRXISEL<1:0> |        | 0000       |
| 5C10                        | SPI3ASTAT        | 31:16     | —          | —       | —      | RXBUFELM<4:0> |         |             |      |          | —    | —      | —      | TXBUFELM<4:0> |              |      |              |        | 0000       |
|                             |                  | 15:0      | —          | —       | —      | —             | SPIBUSY | —           | —    | SPITUR   | SRMT | SPIROV | SPIRBE | —             | SPITBE       | —    | SPITBF       | SPIRBF | 0000       |
| 5C20                        | SPI3ABUF         | 31:16     | DATA<31:0> |         |        |               |         |             |      |          |      |        |        |               |              |      |              |        | 0000       |
|                             |                  | 15:0      | DATA<31:0> |         |        |               |         |             |      |          |      |        |        |               |              |      |              |        | 0000       |
| 5C30                        | SPI3ABRG         | 31:16     | —          | —       | —      | —             | —       | —           | —    | —        | —    | —      | —      | —             | —            | —    | —            | —      | 0000       |
|                             |                  | 15:0      | —          | —       | —      | —             | —       | —           | —    | BRG<8:0> |      |        |        |               |              |      |              |        |            |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table except SPIxBUF have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-15: SPI1 REGISTER MAP FOR PIC32MX575F512L, PIC32MX575F256L, PIC32MX675F512L, PIC32MX695F512L AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register Name | Bit Range | Bits       |         |        |               |         |             |      |          |      |        |        |               |              |      |              | All Resets |      |
|-----------------------------|---------------|-----------|------------|---------|--------|---------------|---------|-------------|------|----------|------|--------|--------|---------------|--------------|------|--------------|------------|------|
|                             |               |           | 31/15      | 30/14   | 29/13  | 28/12         | 27/11   | 26/10       | 25/9 | 24/8     | 23/7 | 22/6   | 21/5   | 20/4          | 19/3         | 18/2 | 17/1         |            | 16/0 |
| 5E00                        | SPI1CON       | 31:16     | FRMEN      | FRMSYNC | FRMPOL | MSEN          | FRMSYPW | FRMCNT<2:0> |      |          | —    | —      | —      | —             | —            | —    | SPIFE        | ENHBUF     | 0000 |
|                             |               | 15:0      | ON         | FRZ     | SIDL   | DISSDO        | MODE32  | MODE16      | SMP  | CKE      | SSEN | CKP    | MSTEN  | —             | STXISEL<1:0> |      | SRXISEL<1:0> |            | 0000 |
| 5E10                        | SPI1STAT      | 31:16     | —          | —       | —      | RXBUFELM<4:0> |         |             |      |          | —    | —      | —      | TXBUFELM<4:0> |              |      |              |            | 0000 |
|                             |               | 15:0      | —          | —       | —      | —             | SPIBUSY | —           | —    | SPI TUR  | SRMT | SPIROV | SPIRBE | —             | SPITBE       | —    | SPITBF       | SPIRBF     | 0000 |
| 5E20                        | SPI1BUF       | 31:16     | DATA<31:0> |         |        |               |         |             |      |          |      |        |        |               |              |      |              |            | 0000 |
|                             |               | 15:0      |            |         |        |               |         |             |      |          |      |        |        |               |              |      |              |            | 0000 |
| 5E30                        | SPI1BRG       | 31:16     | —          | —       | —      | —             | —       | —           | —    | —        | —    | —      | —      | —             | —            | —    | —            | —          | 0000 |
|                             |               | 15:0      | —          | —       | —      | —             | —       | —           | —    | BRG<8:0> |      |        |        |               |              |      |              |            | 0000 |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table except SPIxBUF have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

TABLE 4-16: ADC REGISTER MAP

| Virtual Address<br>(BF80_#) | Register Name          | Bit Range | Bits                               |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | All Resets |
|-----------------------------|------------------------|-----------|------------------------------------|--------|--------|-----------|------------|-----------|-------|-------|-----------|-------|-----------|---------|------------|-------|-------|-------|------------|
|                             |                        |           | 31/15                              | 30/14  | 29/13  | 28/12     | 27/11      | 26/10     | 25/9  | 24/8  | 23/7      | 22/6  | 21/5      | 20/4    | 19/3       | 18/2  | 17/1  | 16/0  |            |
| 9000                        | AD1CON1 <sup>(1)</sup> | 31:16     | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
|                             |                        | 15:0      | ON                                 | FRZ    | SIDL   | —         | —          | FORM<2:0> |       |       | SSRC<2:0> |       |           | CLRASAM | —          | ASAM  | SAMP  | DONE  | 0000       |
| 9010                        | AD1CON2 <sup>(1)</sup> | 31:16     | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
|                             |                        | 15:0      | VCFG2                              | VCFG1  | VCFG0  | OFFCAL    | —          | CSCNA     | —     | —     | BUFS      | —     | SMPI<3:0> |         |            |       | BUFM  | ALTS  | 0000       |
| 9020                        | AD1CON3 <sup>(1)</sup> | 31:16     | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
|                             |                        | 15:0      | ADRC                               | —      | —      | SAMC<4:0> |            |           |       |       | ADCS<7:0> |       |           |         |            |       |       |       | 0000       |
| 9040                        | AD1CHS <sup>(1)</sup>  | 31:16     | CH0NB                              | —      | —      | —         | CH0SB<3:0> |           |       |       | CH0NA     | —     | —         | —       | CH0SA<3:0> |       |       |       | 0000       |
|                             |                        | 15:0      | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
| 9060                        | AD1PCFG <sup>(1)</sup> | 31:16     | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
|                             |                        | 15:0      | PCFG15                             | PCFG14 | PCFG13 | PCFG12    | PCFG11     | PCFG10    | PCFG9 | PCFG8 | PCFG7     | PCFG6 | PCFG5     | PCFG4   | PCFG3      | PCFG2 | PCFG1 | PCFG0 | 0000       |
| 9050                        | AD1CSSL <sup>(1)</sup> | 31:16     | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
|                             |                        | 15:0      | CSSL15                             | CSSL14 | CSSL13 | CSSL12    | CSSL11     | CSSL10    | CSSL9 | CSSL8 | CSSL7     | CSSL6 | CSSL5     | CSSL4   | CSSL3      | CSSL2 | CSSL1 | CSSL0 | 0000       |
| 9070                        | ADC1BUF0               | 31:16     | ADC Result Word 0 (ADC1BUF0<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 9080                        | ADC1BUF1               | 31:16     | ADC Result Word 1 (ADC1BUF1<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 9090                        | ADC1BUF2               | 31:16     | ADC Result Word 2 (ADC1BUF2<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90A0                        | ADC1BUF3               | 31:16     | ADC Result Word 3 (ADC1BUF3<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90B0                        | ADC1BUF4               | 31:16     | ADC Result Word 4 (ADC1BUF4<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90C0                        | ADC1BUF5               | 31:16     | ADC Result Word 5 (ADC1BUF5<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90D0                        | ADC1BUF6               | 31:16     | ADC Result Word 6 (ADC1BUF6<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90E0                        | ADC1BUF7               | 31:16     | ADC Result Word 7 (ADC1BUF7<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90F0                        | ADC1BUF8               | 31:16     | ADC Result Word 8 (ADC1BUF8<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 9100                        | ADC1BUF9               | 31:16     | ADC Result Word 9 (ADC1BUF9<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 9110                        | ADC1BUFA               | 31:16     | ADC Result Word A (ADC1BUFA<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** This register has corresponding CLR, SET, and INV Registers at its virtual address, plus an offset of 0x4, 0x8, and 0xC, respectively. See Section 12.1.1 "CLR, SET and INV Registers" for more information.

TABLE 4-16: ADC REGISTER MAP (CONTINUED)

| Virtual Address<br>(BF80_#) | Register Name | Bit Range | Bits                               |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | All Resets |
|-----------------------------|---------------|-----------|------------------------------------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|------------|
|                             |               |           | 31/15                              | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4 | 19/3 | 18/2 | 17/1 | 16/0 |            |
| 9120                        | ADC1BUFB      | 31:16     | ADC Result Word B (ADC1BUFB<31:0>) |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |
|                             |               | 15:0      |                                    |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |
| 9130                        | ADC1BUFC      | 31:16     | ADC Result Word C (ADC1BUFC<31:0>) |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |
|                             |               | 15:0      |                                    |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |
| 9140                        | ADC1BUFD      | 31:16     | ADC Result Word D (ADC1BUFD<31:0>) |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |
|                             |               | 15:0      |                                    |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |
| 9150                        | ADC1BUFE      | 31:16     | ADC Result Word E (ADC1BUFE<31:0>) |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |
|                             |               | 15:0      |                                    |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |
| 9160                        | ADC1BUFF      | 31:16     | ADC Result Word F (ADC1BUFF<31:0>) |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |
|                             |               | 15:0      |                                    |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.  
**Note 1:** This register has corresponding CLR, SET, and INV Registers at its virtual address, plus an offset of 0x4, 0x8, and 0xC, respectively. See Section 12.1.1 “CLR, SET and INV Registers” for more information.

TABLE 4-17: DMA GLOBAL REGISTER MAP

| Virtual Address<br>(BF88_#) | Register<br>Name      | Bit Range | Bits          |       |       |         |       |       |      |      |      |      |      |      |      |            |      | All Resets |
|-----------------------------|-----------------------|-----------|---------------|-------|-------|---------|-------|-------|------|------|------|------|------|------|------|------------|------|------------|
|                             |                       |           | 31/15         | 30/14 | 29/13 | 28/12   | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4 | 19/3 | 18/2       | 17/1 |            |
| 3000                        | DMACON <sup>(1)</sup> | 31:16     | —             | —     | —     | —       | —     | —     | —    | —    | —    | —    | —    | —    | —    | —          | —    | 0000       |
|                             |                       | 15:0      | ON            | FRZ   | —     | SUSPEND | BUSY  | —     | —    | —    | —    | —    | —    | —    | —    | —          | —    | 0000       |
| 3010                        | DMASTAT               | 31:16     | —             | —     | —     | —       | —     | —     | —    | —    | —    | —    | —    | —    | —    | —          | —    | 0000       |
|                             |                       | 15:0      | —             | —     | —     | —       | —     | —     | —    | —    | —    | —    | —    | —    | RDWR | DMACH<2:0> |      | 0000       |
| 3020                        | DMAADDR               | 31:16     | DMAADDR<31:0> |       |       |         |       |       |      |      |      |      |      |      |      |            |      | 0000       |
|                             |                       | 15:0      |               |       |       |         |       |       |      |      |      |      |      |      |      |            |      | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** This register has corresponding CLR, SET, and INV Registers at its virtual address, plus an offset of 0x4, 0x8, and 0xC, respectively. See Section 12.1.1 “CLR, SET and INV Registers” for more information.

TABLE 4-18: DMA CRC REGISTER MAP<sup>(1)</sup>

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits           |       |           |           |       |       |      |      |       |        |        |      |      |            |      | All Resets |
|-----------------------------|------------------|-----------|----------------|-------|-----------|-----------|-------|-------|------|------|-------|--------|--------|------|------|------------|------|------------|
|                             |                  |           | 31/15          | 30/14 | 29/13     | 28/12     | 27/11 | 26/10 | 25/9 | 24/8 | 23/7  | 22/6   | 21/5   | 20/4 | 19/3 | 18/2       | 17/1 |            |
| 3030                        | DCRCCON          | 31:16     | —              | —     | BYTO<1:0> |           | WBO   | —     | —    | BITO | —     | —      | —      | —    | —    | —          | —    | 0000       |
|                             |                  | 15:0      | —              | —     | —         | PLEN<4:0> |       |       |      |      | CRCEN | CRCAPP | CRCTYP | —    | —    | CRCCH<2:0> |      | 0000       |
| 3040                        | DCRCDATA         | 31:16     | DCRCDATA<31:0> |       |           |           |       |       |      |      |       |        |        |      |      |            |      | 0000       |
|                             |                  | 15:0      |                |       |           |           |       |       |      |      |       |        |        |      |      |            |      | 0000       |
| 3050                        | DCRCXOR          | 31:16     | DCRCXOR<31:0>  |       |           |           |       |       |      |      |       |        |        |      |      |            |      | 0000       |
|                             |                  | 15:0      |                |       |           |           |       |       |      |      |       |        |        |      |      |            |      | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See Section 12.1.1 “CLR, SET and INV Registers” for more information.

**TABLE 4-19: DMA CHANNELS 0-7 REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF88.#) | Register<br>Name | Bit Range | Bits         |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | All Resets |
|-----------------------------|------------------|-----------|--------------|-------|-------|-------|-------|-------|------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|------------|
|                             |                  |           | 31/15        | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8        | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1       | 16/0   |            |
| 3060                        | DCH0CON          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | CHBUSY       | —     | —     | —     | —     | —     | —    | CHCHNS      | CHEN   | CHAED  | CHCHN  | CHAEN  | —      | CHEDET | CHPRI<1:0> | 0000   |            |
| 3070                        | DCH0ECON         | 31:16     | —            | —     | —     | —     | —     | —     | —    | CHAIRQ<7:0> |        |        |        |        |        |        |            | 00FF   |            |
|                             |                  | 15:0      | CHSIRQ<7:0>  |       |       |       |       |       |      | CFORCE      | CABORT | PATEN  | SIRQEN | AIRQEN | —      | —      | —          | FF00   |            |
| 3080                        | DCH0INT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | CHSDIE | CHSHIE | CHDDIE | CHDHIE | CHBCIE | CHCCIE | CHTAIE     | CHERIE | 0000       |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | —           | CHSDIF | CHSHIF | CHDDIF | CHDHIF | CHBCIF | CHCCIF | CHTAIF     | CHERIF | 0000       |
| 3090                        | DCH0SSA          | 31:16     | CHSSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
| 30A0                        | DCH0DSA          | 31:16     | CHDSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
| 30B0                        | DCH0SSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | CHSSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
| 30C0                        | DCH0DSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | CHDSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
| 30D0                        | DCH0SPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | CHSPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
| 30E0                        | DCH0DPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | CHDPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
| 30F0                        | DCH0CSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | CHCSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
| 3100                        | DCH0CPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | CHCPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
| 3110                        | DCH0DAT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | CHPDAT<7:0> |        |        |        |        |        |        |            | 0000   |            |
| 3120                        | DCH1CON          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | CHBUSY       | —     | —     | —     | —     | —     | —    | CHCHNS      | CHEN   | CHAED  | CHCHN  | CHAEN  | —      | CHEDET | CHPRI<1:0> | 0000   |            |
| 3130                        | DCH1ECON         | 31:16     | —            | —     | —     | —     | —     | —     | —    | CHAIRQ<7:0> |        |        |        |        |        |        |            | 00FF   |            |
|                             |                  | 15:0      | CHSIRQ<7:0>  |       |       |       |       |       |      | CFORCE      | CABORT | PATEN  | SIRQEN | AIRQEN | —      | —      | —          | FF00   |            |
| 3140                        | DCH1INT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | CHSDIE | CHSHIE | CHDDIE | CHDHIE | CHBCIE | CHCCIE | CHTAIE     | CHERIE | 0000       |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | —           | CHSDIF | CHSHIF | CHDDIF | CHDHIF | CHBCIF | CHCCIF | CHTAIF     | CHERIF | 0000       |
| 3150                        | DCH1SSA          | 31:16     | CHSSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers except DCHxSPTR, DCHxDPTR, and DCHxCPTR have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-19: DMA CHANNELS 0-7 REGISTER MAP<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits         |       |       |       |       |       |      |             |        |        |        |        |        |        |            | All Resets |
|-----------------------------|------------------|-----------|--------------|-------|-------|-------|-------|-------|------|-------------|--------|--------|--------|--------|--------|--------|------------|------------|
|                             |                  |           | 31/15        | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8        | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1       |            |
| 3160                        | DCH1DSA          | 31:16     | CHDSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 3170                        | DCH1SSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHSSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 3180                        | DCH1DSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHDSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 3190                        | DCH1SPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHSPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 31A0                        | DCH1DPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHDPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 31B0                        | DCH1CSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHCSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 31C0                        | DCH1CPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHCPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 31D0                        | DCH1DAT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | CHPDAT<7:0> |        |        |        |        |        |        | 0000       |            |
| 31E0                        | DCH2CON          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHBUSY       | —     | —     | —     | —     | —     | —    | CHCHNS      | CHEN   | CHAED  | CHCHN  | CHAEN  | —      | CHEDET | CHPRI<1:0> | 0000       |
| 31F0                        | DCH2ECON         | 31:16     | —            | —     | —     | —     | —     | —     | —    | CHAIRQ<7:0> |        |        |        |        |        |        |            | 00FF       |
|                             |                  | 15:0      | CHSIRQ<7:0>  |       |       |       |       |       |      | CFORCE      | CABORT | PATEN  | SIRQEN | AIRQEN | —      | —      | —          | FF00       |
| 3200                        | DCH2INT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | CHSDIE      | CHSHIE | CHDDIE | CHDHIE | CHBCIE | CHCCIE | CHTAIE | CHERIE     | 0000       |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | CHSDIF      | CHSHIF | CHDDIF | CHDHIF | CHBCIF | CHCCIF | CHTAIF | CHERIF     | 0000       |
| 3210                        | DCH2SSA          | 31:16     | CHSSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 3220                        | DCH2DSA          | 31:16     | CHDSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 3230                        | DCH2SSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHSSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 3240                        | DCH2DSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHDSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 3250                        | DCH2SPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHSPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |
| 3260                        | DCH2DPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | 0000       |
|                             |                  | 15:0      | CHDPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers except DCHxSPTR, DCHxDPTR, and DCHxCPTR have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-19: DMA CHANNELS 0-7 REGISTER MAP<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits         |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | All Resets |      |
|-----------------------------|------------------|-----------|--------------|-------|-------|-------|-------|-------|------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|------------|------|
|                             |                  |           | 31/15        | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8        | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1       | 16/0   |            |      |
| 3270                        | DCH2CSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHCSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 3280                        | DCH2CPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHCPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 3290                        | DCH2DAT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | CHPDAT<7:0> |        |        |        |        |        |        |            |        |            | 0000 |
| 32A0                        | DCH3CON          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHBUSY       | —     | —     | —     | —     | —     | —    | CHCHNS      | CHEN   | CHAED  | CHCHN  | CHAEN  | —      | CHEDET | CHPRI<1:0> |        | 0000       |      |
| 32B0                        | DCH3ECON         | 31:16     | —            | —     | —     | —     | —     | —     | —    | CHAIRQ<7:0> |        |        |        |        |        |        |            |        |            | 00FF |
|                             |                  | 15:0      | CHSIRQ<7:0>  |       |       |       |       |       |      |             | CFORCE | CABORT | PATEN  | SIRQEN | AIRQEN | —      | —          | —      | FF00       |      |
| 32C0                        | DCH3INT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | CHSDIE | CHSHIE | CHDDIE | CHDHIE | CHBCIE | CHCCIE | CHTAIE     | CHERIE | 0000       |      |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | —           | CHSDIF | CHSHIF | CHDDIF | CHDHIF | CHBCIF | CHCCIF | CHTAIF     | CHERIF | 0000       |      |
| 32D0                        | DCH3SSA          | 31:16     | CHSSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
|                             |                  | 15:0      | CHSSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 32E0                        | DCH3DSA          | 31:16     | CHDSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
|                             |                  | 15:0      | CHDSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 32F0                        | DCH3SSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHSSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 3300                        | DCH3DSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHDSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 3310                        | DCH3SPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHSPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 3320                        | DCH3DPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHDPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 3330                        | DCH3CSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHCSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 3340                        | DCH3CPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHCPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |        | 0000       |      |
| 3350                        | DCH3DAT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | CHPDAT<7:0> |        |        |        |        |        |        |            |        |            | 0000 |
| 3360                        | DCH4CON          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —      | 0000       |      |
|                             |                  | 15:0      | CHBUSY       | —     | —     | —     | —     | —     | —    | CHCHNS      | CHEN   | CHAED  | CHCHN  | CHAEN  | —      | CHEDET | CHPRI<1:0> |        | 0000       |      |
| 3370                        | DCH4ECON         | 31:16     | —            | —     | —     | —     | —     | —     | —    | CHAIRQ<7:0> |        |        |        |        |        |        |            |        |            | 00FF |
|                             |                  | 15:0      | CHSIRQ<7:0>  |       |       |       |       |       |      |             | CFORCE | CABORT | PATEN  | SIRQEN | AIRQEN | —      | —          | —      | FF00       |      |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers except DCHxSPTR, DCHxDPTR, and DCHxCPTR have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-19: DMA CHANNELS 0-7 REGISTER MAP<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits         |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | All Resets |
|-----------------------------|------------------|-----------|--------------|-------|-------|-------|-------|-------|------|--------|-------------|--------|--------|--------|--------|--------|------------|--------|------------|
|                             |                  |           | 31/15        | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8   | 23/7        | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1       | 16/0   |            |
| 3380                        | DCH4INT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | CHSDIE      | CHSHIE | CHDDIE | CHDHIE | CHBCIE | CHCCIE | CHTAIE     | CHERIE | 0000       |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | —      | CHSDIF      | CHSHIF | CHDDIF | CHDHIF | CHBCIF | CHCCIF | CHTAIF     | CHERIF | 0000       |
| 3390                        | DCH4SSA          | 31:16     | CHSSA<31:0>  |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 33A0                        | DCH4DSA          | 31:16     | CHDSA<31:0>  |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 33B0                        | DCH4SSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHSSIZ<15:0> |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 33C0                        | DCH4DSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHDSIZ<15:0> |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 33D0                        | DCH4SPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHSPTR<15:0> |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 33E0                        | DCH4DPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHDPTR<15:0> |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 33F0                        | DCH4CSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHCSIZ<15:0> |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 3400                        | DCH4CPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHCPTR<15:0> |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 3410                        | DCH4DAT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | —      | CHPDAT<7:0> |        |        |        |        |        |            |        | 0000       |
| 3420                        | DCH5CON          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHBUSY       | —     | —     | —     | —     | —     | —    | CHCHNS | CHEN        | CHAED  | CHCHN  | CHAEN  | —      | CHEDET | CHPRI<1:0> |        | 0000       |
| 3430                        | DCH5ECON         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | CHAIRQ<7:0> |        |        |        |        |        |            |        | 00FF       |
|                             |                  | 15:0      | CHSIRQ<7:0>  |       |       |       |       |       |      |        | CFORCE      | CABORT | PATEN  | SIRQEN | AIRQEN | —      | —          | —      | FF00       |
| 3440                        | DCH5INT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | CHSDIE      | CHSHIE | CHDDIE | CHDHIE | CHBCIE | CHCCIE | CHTAIE     | CHERIE | 0000       |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | —      | CHSDIF      | CHSHIF | CHDDIF | CHDHIF | CHBCIF | CHCCIF | CHTAIF     | CHERIF | 0000       |
| 3450                        | DCH5SSA          | 31:16     | CHSSA<31:0>  |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 3460                        | DCH5DSA          | 31:16     | CHDSA<31:0>  |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
|                             |                  | 15:0      |              |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 3470                        | DCH5SSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHSSIZ<15:0> |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |
| 3480                        | DCH5DSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —      | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHDSIZ<15:0> |       |       |       |       |       |      |        |             |        |        |        |        |        |            |        | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers except DCHxSPTR, DCHxDPTR, and DCHxCPTR have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-19: DMA CHANNELS 0-7 REGISTER MAP<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits         |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | All Resets |      |
|-----------------------------|------------------|-----------|--------------|-------|-------|-------|-------|-------|------|-------------|--------|--------|--------|--------|--------|--------|------------|------|------------|------|
|                             |                  |           | 31/15        | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8        | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1       | 16/0 |            |      |
| 3490                        | DCH5SPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHSPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 34A0                        | DCH5DPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHDPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 34B0                        | DCH5CSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHCSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 34C0                        | DCH5CPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHCPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 34D0                        | DCH5DAT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | CHPDAT<7:0> |        |        |        |        |        |        |            |      |            | 0000 |
| 34E0                        | DCH6CON          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHBUSY       | —     | —     | —     | —     | —     | —    | CHCHNS      | CHEN   | CHAED  | CHCHN  | CHAEN  | —      | CHEDET | CHPRI<1:0> |      | 0000       |      |
| 34F0                        | DCH6ECON         | 31:16     | —            | —     | —     | —     | —     | —     | —    | CHAIRQ<7:0> |        |        |        |        |        |        |            |      |            | 00FF |
|                             |                  | 15:0      | CHSIRQ<7:0>  |       |       |       |       |       |      | CFORCE      | CABORT | PATEN  | SIRQEN | AIRQEN | —      | —      | —          | FF00 |            |      |
| 3500                        | DCH6INT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | CHSDIE      | CHSHIE | CHDDIE | CHDHIE | CHBCIE | CHCCIE | CHTAIE | CHERIE     | 0000 |            |      |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | CHSDIF      | CHSHIF | CHDDIF | CHDHIF | CHBCIF | CHCCIF | CHTAIF | CHERIF     | 0000 |            |      |
| 3510                        | DCH6SSA          | 31:16     | CHSSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
|                             |                  | 15:0      |              |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 3520                        | DCH6DSA          | 31:16     | CHDSA<31:0>  |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
|                             |                  | 15:0      |              |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 3530                        | DCH6SSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHSSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 3540                        | DCH6DSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHDSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 3550                        | DCH6SPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHSPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 3560                        | DCH6DPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHDPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 3570                        | DCH6CSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHCSIZ<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 3580                        | DCH6CPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | CHCPTR<15:0> |       |       |       |       |       |      |             |        |        |        |        |        |        |            |      | 0000       |      |
| 3590                        | DCH6DAT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —      | —      | —      | —      | —      | —      | —          | —    | 0000       |      |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | CHPDAT<7:0> |        |        |        |        |        |        |            |      |            | 0000 |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers except DCHxSPTR, DCHxDPTR, and DCHxCPTR have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-19: DMA CHANNELS 0-7 REGISTER MAP<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits         |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | All Resets |
|-----------------------------|------------------|-----------|--------------|-------|-------|-------|-------|-------|------|-------------|-------------|--------|--------|--------|--------|--------|------------|--------|------------|
|                             |                  |           | 31/15        | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8        | 23/7        | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1       | 16/0   |            |
| 35A0                        | DCH7CON          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —           | —      | —      | —      | —      | —      | —          | 0000   |            |
|                             |                  | 15:0      | CHBUSY       | —     | —     | —     | —     | —     | —    | CHCHNS      | CHEN        | CHAED  | CHCHN  | CHAEN  | —      | CHEDET | CHPRI<1:0> | 0000   |            |
| 35B0                        | DCH7ECON         | 31:16     | —            | —     | —     | —     | —     | —     | —    | CHAIRQ<7:0> |             |        |        |        |        |        |            | 00FF   |            |
|                             |                  | 15:0      | CHSIRQ<7:0>  |       |       |       |       |       |      |             | CFORCE      | CABORT | PATEN  | SIRQEN | AIRQEN | —      | —          | —      | FF00       |
| 35C0                        | DCH7INT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | CHSDIE      | CHSHIE | CHDDIE | CHDHIE | CHBCIE | CHCCIE | CHTAIE     | CHERIE | 0000       |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | —           | CHSDIF      | CHSHIF | CHDDIF | CHDHIF | CHBCIF | CHCCIF | CHTAIF     | CHERIF | 0000       |
| 35D0                        | DCH7SSA          | 31:16     | CHSSA<31:0>  |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
|                             |                  | 15:0      | CHSSA<31:0>  |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
| 35E0                        | DCH7DSA          | 31:16     | CHDSA<31:0>  |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
|                             |                  | 15:0      | CHDSA<31:0>  |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
| 35F0                        | DCH7SSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHSSIZ<15:0> |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
| 3600                        | DCH7DSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHDSIZ<15:0> |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
| 3610                        | DCH7SPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHSPTR<15:0> |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
| 3620                        | DCH7DPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHDPTR<15:0> |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
| 3630                        | DCH7CSIZ         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHCSIZ<15:0> |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
| 3640                        | DCH7CPTR         | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | CHCPTR<15:0> |       |       |       |       |       |      |             |             |        |        |        |        |        |            |        | 0000       |
| 3650                        | DCH7DAT          | 31:16     | —            | —     | —     | —     | —     | —     | —    | —           | —           | —      | —      | —      | —      | —      | —          | —      | 0000       |
|                             |                  | 15:0      | —            | —     | —     | —     | —     | —     | —    | —           | CHPDAT<7:0> |        |        |        |        |        |            |        | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers except DCHxSPTR, DCHxDPTR, and DCHxCPTR have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-20: COMPARATOR REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |      |      |            |      |      |      |      |      |          |       | All Resets |
|-----------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|------|------|------------|------|------|------|------|------|----------|-------|------------|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7       | 22/6 | 21/5 | 20/4 | 19/3 | 18/2 | 17/1     | 16/0  |            |
| A000                        | CM1CON           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —          | —    | —    | —    | —    | —    | —        | —     | 0000       |
|                             |                  | 15:0      | ON    | COE   | CPOL  | —     | —     | —     | —    | COUT | EVPOL<1:0> |      | —    | CREF | —    | —    | CCH<1:0> |       | 0000       |
| A010                        | CM2CON           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —          | —    | —    | —    | —    | —    | —        | —     | 0000       |
|                             |                  | 15:0      | ON    | COE   | CPOL  | —     | —     | —     | —    | COUT | EVPOL<1:0> |      | —    | CREF | —    | —    | CCH<1:0> |       | 0000       |
| A060                        | CMSTAT           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —          | —    | —    | —    | —    | —    | —        | —     | 0000       |
|                             |                  | 15:0      | —     | FRZ   | SIDL  | —     | —     | —     | —    | —    | —          | —    | —    | —    | —    | —    | C2OUT    | C1OUT | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-21: COMPARATOR VOLTAGE REFERENCE REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |      |      |      |       |      |       |          |      |      |      | All Resets |
|-----------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|------|------|------|-------|------|-------|----------|------|------|------|------------|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6  | 21/5 | 20/4  | 19/3     | 18/2 | 17/1 | 16/0 |            |
| 9800                        | CVRCON           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —     | —    | —     | —        | —    | —    | —    | 0000       |
|                             |                  | 15:0      | ON    | —     | —     | —     | —     | —     | —    | —    | —    | CVROE | CVRR | CVRSS | CVR<3:0> |      |      |      | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-22: FLASH CONTROLLER REGISTER MAP**

| Virtual Address<br>(BF80_#) | Register<br>Name       | Bit Range | Bits             |         |        |        |         |       |      |      |      |      |      |      |            |      |      | All Resets |
|-----------------------------|------------------------|-----------|------------------|---------|--------|--------|---------|-------|------|------|------|------|------|------|------------|------|------|------------|
|                             |                        |           | 31/15            | 30/14   | 29/13  | 28/12  | 27/11   | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4 | 19/3       | 18/2 | 17/1 |            |
| F400                        | NVMCON <sup>(1)</sup>  | 31:16     | —                | —       | —      | —      | —       | —     | —    | —    | —    | —    | —    | —    | —          | —    | —    | 0000       |
|                             |                        | 15:0      | NVMWR            | NVMWREN | NVMERR | LVDERR | LVDSTAT | —     | —    | —    | —    | —    | —    | —    | NVMOP<3:0> |      |      | 0000       |
| F410                        | NVMKEY                 | 31:16     | NVMKEY<31:0>     |         |        |        |         |       |      |      |      |      |      |      |            |      |      | 0000       |
|                             |                        | 15:0      |                  |         |        |        |         |       |      |      |      |      |      |      |            |      |      | 0000       |
| F420                        | NVMADDR <sup>(1)</sup> | 31:16     | NVMADDR<31:0>    |         |        |        |         |       |      |      |      |      |      |      |            |      |      | 0000       |
|                             |                        | 15:0      |                  |         |        |        |         |       |      |      |      |      |      |      |            |      |      | 0000       |
| F430                        | NVMDATA                | 31:16     | NVMDATA<31:0>    |         |        |        |         |       |      |      |      |      |      |      |            |      |      | 0000       |
|                             |                        | 15:0      |                  |         |        |        |         |       |      |      |      |      |      |      |            |      |      | 0000       |
| F440                        | NVMSRC<br>ADDR         | 31:16     | NVMSRCADDR<31:0> |         |        |        |         |       |      |      |      |      |      |      |            |      |      | 0000       |
|                             |                        | 15:0      |                  |         |        |        |         |       |      |      |      |      |      |      |            |      |      | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** This register has corresponding CLR, SET, and INV Registers at its virtual address, plus an offset of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-23: SYSTEM CONTROL REGISTER MAP<sup>(1,2)</sup>**

| Virtual Address<br>(BF80_#) | Register Name | Bit Range | Bits  |           |              |       |       |            |      |       |             |         |          |            |       |              |        | All Resets <sup>(2)</sup> |      |
|-----------------------------|---------------|-----------|-------|-----------|--------------|-------|-------|------------|------|-------|-------------|---------|----------|------------|-------|--------------|--------|---------------------------|------|
|                             |               |           | 31/15 | 30/14     | 29/13        | 28/12 | 27/11 | 26/10      | 25/9 | 24/8  | 23/7        | 22/6    | 21/5     | 20/4       | 19/3  | 18/2         | 17/1   |                           | 16/0 |
| F000                        | OSCCON        | 31:16     | —     | —         | PLLODIV<2:0> |       |       | RCDIV<2:0> |      |       | —           | SOSCRDY | —        | PBDIV<1:0> |       | PLLMULT<2:0> |        |                           | 0000 |
|                             |               | 15:0      | —     | COSC<2:0> |              |       | —     | NOSC<2:0>  |      |       | CLKLOCK     | ULOCK   | LOCK     | SLPEN      | CF    | UFRGEN       | SOSCEN | OSWEN                     | 0000 |
| F010                        | OSCTUN        | 31:16     | —     | —         | —            | —     | —     | —          | —    | —     | —           | —       | —        | —          | —     | —            | —      | —                         | 0000 |
|                             |               | 15:0      | —     | —         | —            | —     | —     | —          | —    | —     | —           | —       | TUN<5:0> |            |       |              |        |                           | 0000 |
| 0000                        | WDTCON        | 31:16     | —     | —         | —            | —     | —     | —          | —    | —     | —           | —       | —        | —          | —     | —            | —      | —                         | 0000 |
|                             |               | 15:0      | ON    | —         | —            | —     | —     | —          | —    | —     | SWDTPS<4:0> |         |          |            |       |              | —      | WDTCLR                    | 0000 |
| F600                        | RCON          | 31:16     | —     | —         | —            | —     | —     | —          | —    | —     | —           | —       | —        | —          | —     | —            | —      | —                         | 0000 |
|                             |               | 15:0      | —     | —         | —            | —     | —     | —          | CM   | VREGS | EXTR        | SWR     | —        | WDTO       | SLEEP | IDLE         | BOR    | POR                       | 0000 |
| F610                        | RSWRST        | 31:16     | —     | —         | —            | —     | —     | —          | —    | —     | —           | —       | —        | —          | —     | —            | —      | —                         | 0000 |
|                             |               | 15:0      | —     | —         | —            | —     | —     | —          | —    | —     | —           | —       | —        | —          | —     | —            | —      | SWRST                     | 0000 |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**2:** Reset values are dependent on the DEVCFGx Configuration bits and the type of reset.

**TABLE 4-24: PORT A REGISTER MAP FOR PIC32MX575F256L, PIC32MX575F512L, PIC32MX675F512L, PIC32MX695F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits    |         |       |       |       |         |        |      |        |        |        |        |        |        |        |        | All Resets |
|-----------------------------|------------------|-----------|---------|---------|-------|-------|-------|---------|--------|------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
|                             |                  |           | 31/15   | 30/14   | 29/13 | 28/12 | 27/11 | 26/10   | 25/9   | 24/8 | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1   | 16/0   |            |
| 6000                        | TRISA            | 31:16     | —       | —       | —     | —     | —     | —       | —      | —    | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | TRISA15 | TRISA14 | —     | —     | —     | TRISA10 | TRISA9 | —    | TRISA7 | TRISA6 | TRISA5 | TRISA4 | TRISA3 | TRISA2 | TRISA1 | TRISA0 | C6FF       |
| 6010                        | PORTA            | 31:16     | —       | —       | —     | —     | —     | —       | —      | —    | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | RA15    | RA14    | —     | —     | —     | RA10    | RA9    | —    | RA7    | RA6    | RA5    | RA4    | RA3    | RA2    | RA1    | RA0    | xxxx       |
| 6020                        | LATA             | 31:16     | —       | —       | —     | —     | —     | —       | —      | —    | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | LATA15  | LATA14  | —     | —     | —     | LATA10  | LATA9  | —    | LATA7  | LATA6  | LATA5  | LATA4  | LATA3  | LATA2  | LATA1  | LATA0  | xxxx       |
| 6030                        | ODCA             | 31:16     | —       | —       | —     | —     | —     | —       | —      | —    | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | ODCA15  | ODCA14  | —     | —     | —     | ODCA10  | ODCA9  | —    | ODCA7  | ODCA6  | ODCA5  | ODCA4  | ODCA3  | ODCA2  | ODCA1  | ODCA0  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-25: PORT B REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits    |         |         |         |         |         |        |        |        |        |        |        |        |        |        |        | All Resets |
|-----------------------------|------------------|-----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
|                             |                  |           | 31/15   | 30/14   | 29/13   | 28/12   | 27/11   | 26/10   | 25/9   | 24/8   | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1   | 16/0   |            |
| 6040                        | TRISB            | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | TRISB15 | TRISB14 | TRISB13 | TRISB12 | TRISB11 | TRISB10 | TRISB9 | TRISB8 | TRISB7 | TRISB6 | TRISB5 | TRISB4 | TRISB3 | TRISB2 | TRISB1 | TRISB0 | FFFF       |
| 6050                        | PORTB            | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | RB15    | RB14    | RB13    | RB12    | RB11    | RB10    | RB9    | RB8    | RB7    | RB6    | RB5    | RB4    | RB3    | RB2    | RB1    | RB0    | xxxx       |
| 6060                        | LATB             | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | LATB15  | LATB14  | LATB13  | LATB12  | LATB11  | LATB10  | LATB9  | LATB8  | LATB7  | LATB6  | LATB5  | LATB4  | LATB3  | LATB2  | LATB1  | LATB0  | xxxx       |
| 6070                        | ODCB             | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | ODCB15  | ODCB14  | ODCB13  | ODCB12  | ODCB11  | ODCB10  | ODCB9  | ODCB8  | ODCB7  | ODCB6  | ODCB5  | ODCB4  | ODCB3  | ODCB2  | ODCB1  | ODCB0  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-26: PORT C REGISTER MAP FOR PIC32MX575F256H, PIC32MX575F512H, PIC32MX675F512H, PIC32MX695F512H, AND PIC32MX795F512H DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits    |         |         |         |       |       |      |      |      |      |      |      |      |      |      |      | All Resets |
|-----------------------------|------------------|-----------|---------|---------|---------|---------|-------|-------|------|------|------|------|------|------|------|------|------|------|------------|
|                             |                  |           | 31/15   | 30/14   | 29/13   | 28/12   | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4 | 19/3 | 18/2 | 17/1 | 16/0 |            |
| 6080                        | TRISC            | 31:16     | —       | —       | —       | —       | —     | —     | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | TRISC15 | TRISC14 | TRISC13 | TRISC12 | —     | —     | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | F000       |
| 6090                        | PORTC            | 31:16     | —       | —       | —       | —       | —     | —     | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | RC15    | RC14    | RC13    | RC12    | —     | —     | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | xxxx       |
| 60A0                        | LATC             | 31:16     | —       | —       | —       | —       | —     | —     | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | LATC15  | LATC14  | LATC13  | LATC12  | —     | —     | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | xxxx       |
| 60B0                        | ODCC             | 31:16     | —       | —       | —       | —       | —     | —     | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | 0000       |
|                             |                  | 15:0      | ODCC15  | ODCC14  | ODCC13  | ODCC12  | —     | —     | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-27: PORT C REGISTER MAP FOR PIC32MX575F256L, PIC32MX575F512L, PIC32MX675F512L, PIC32MX695F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits    |         |         |         |       |       |      |      |      |      |      |        |        |        |        |      | All Resets |
|-----------------------------|------------------|-----------|---------|---------|---------|---------|-------|-------|------|------|------|------|------|--------|--------|--------|--------|------|------------|
|                             |                  |           | 31/15   | 30/14   | 29/13   | 28/12   | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4   | 19/3   | 18/2   | 17/1   | 16/0 |            |
| 6080                        | TRISC            | 31:16     | —       | —       | —       | —       | —     | —     | —    | —    | —    | —    | —    | —      | —      | —      | —      | —    | 0000       |
|                             |                  | 15:0      | TRISC15 | TRISC14 | TRISC13 | TRISC12 | —     | —     | —    | —    | —    | —    | —    | TRISC4 | TRISC3 | TRISC2 | TRISC1 | —    | F00F       |
| 6090                        | PORTC            | 31:16     | —       | —       | —       | —       | —     | —     | —    | —    | —    | —    | —    | —      | —      | —      | —      | —    | 0000       |
|                             |                  | 15:0      | RC15    | RC14    | RC13    | RC12    | —     | —     | —    | —    | —    | —    | —    | RC4    | RC3    | RC2    | RC1    | —    | xxxx       |
| 60A0                        | LATC             | 31:16     | —       | —       | —       | —       | —     | —     | —    | —    | —    | —    | —    | —      | —      | —      | —      | —    | 0000       |
|                             |                  | 15:0      | LATC15  | LATC14  | LATC13  | LATC12  | —     | —     | —    | —    | —    | —    | —    | LATC4  | LATC3  | LATC2  | LATC1  | —    | xxxx       |
| 60B0                        | ODCC             | 31:16     | —       | —       | —       | —       | —     | —     | —    | —    | —    | —    | —    | —      | —      | —      | —      | —    | 0000       |
|                             |                  | 15:0      | ODCC15  | ODCC14  | ODCC13  | ODCC12  | —     | —     | —    | —    | —    | —    | —    | ODCC4  | ODCC3  | ODCC2  | ODCC1  | —    | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-28: PORT D REGISTER MAP FOR PIC32MX575F256H, PIC32MX575F512H, PIC32MX675F512H, PIC32MX695F512H, AND PIC32MX795F512H DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits  |       |       |       |         |         |        |        |        |        |        |        |        |        |        |        | All Resets |
|-----------------------------|------------------|-----------|-------|-------|-------|-------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11   | 26/10   | 25/9   | 24/8   | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1   | 16/0   |            |
| 60C0                        | TRISD            | 31:16     | —     | —     | —     | —     | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | TRISD11 | TRISD10 | TRISD9 | TRISD8 | TRISD7 | TRISD6 | TRISD5 | TRISD4 | TRISD3 | TRISD2 | TRISD1 | TRISD0 | 0FFF       |
| 60D0                        | PORTD            | 31:16     | —     | —     | —     | —     | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | RD11    | RD10    | RD9    | RD8    | RD7    | RD6    | RD5    | RD4    | RD3    | RD2    | RD1    | RD0    | xxxx       |
| 60E0                        | LATD             | 31:16     | —     | —     | —     | —     | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | LATD11  | LATD10  | LATD9  | LATD8  | LATD7  | LATD6  | LATD5  | LATD4  | LATD3  | LATD2  | LATD1  | LATD0  | xxxx       |
| 60F0                        | ODCD             | 31:16     | —     | —     | —     | —     | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | ODCD11  | ODCD10  | ODCD9  | ODCD8  | ODCD7  | ODCD6  | ODCD5  | ODCD4  | ODCD3  | ODCD2  | ODCD1  | ODCD0  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-29: PORT D REGISTER MAP FOR PIC32MX575F256L, PIC32MX575F512L, PIC32MX675F512L, PIC32MX695F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits    |         |         |         |         |         |        |        |        |        |        |        |        |        |        |        | All Resets |
|-----------------------------|------------------|-----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
|                             |                  |           | 31/15   | 30/14   | 29/13   | 28/12   | 27/11   | 26/10   | 25/9   | 24/8   | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1   | 16/0   |            |
| 60C0                        | TRISD            | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | TRISD15 | TRISD14 | TRISD13 | TRISD12 | TRISD11 | TRISD10 | TRISD9 | TRISD8 | TRISD7 | TRISD6 | TRISD5 | TRISD4 | TRISD3 | TRISD2 | TRISD1 | TRISD0 | FFFF       |
| 60D0                        | PORTD            | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | RD15    | RD14    | RD13    | RD12    | RD11    | RD10    | RD9    | RD8    | RD7    | RD6    | RD5    | RD4    | RD3    | RD2    | RD1    | RD0    | xxxx       |
| 60E0                        | LATD             | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | LAT15   | LAT14   | LAT13   | LAT12   | LATD11  | LATD10  | LATD9  | LATD8  | LATD7  | LATD6  | LATD5  | LATD4  | LATD3  | LATD2  | LATD1  | LATD0  | xxxx       |
| 60F0                        | ODCD             | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | ODCD15  | ODCD14  | ODCD13  | ODCD12  | ODCD11  | ODCD10  | ODCD9  | ODCD8  | ODCD7  | ODCD6  | ODCD5  | ODCD4  | ODCD3  | ODCD2  | ODCD1  | ODCD0  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-30: PORT E REGISTER MAP FOR PIC32MX575F256H, PIC32MX575F512H, PIC32MX675F512H, PIC32MX695F512H, AND PIC32MX795F512H DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |      |      |        |        |        |        |        |        |        |        | All Resets |
|-----------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|------|------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1   | 16/0   |            |
| 6100                        | TRISE            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | TRISE7 | TRISE6 | TRISE5 | TRISE4 | TRISE3 | TRISE2 | TRISE1 | TRISE0 | 00FF       |
| 6110                        | PORTE            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | RE7    | RE6    | RE5    | RE4    | RE3    | RE2    | RE1    | RE0    | xxxx       |
| 6120                        | LATE             | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | LATE7  | LATE6  | LATE5  | LATE4  | LATE3  | LATE2  | LATE1  | LATE0  | xxxx       |
| 6130                        | ODCE             | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | ODCE7  | ODCE6  | ODCE5  | ODCE4  | ODCE3  | ODCE2  | ODCE1  | ODCE0  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-31: PORT E REGISTER MAP FOR PIC32MX575F256L, PIC32MX575F512L, PIC32MX675F512L, PIC32MX695F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |        |        |        |        |        |        |        |        |        |        | All Resets |
|-----------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9   | 24/8   | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2   | 17/1   | 16/0   |            |
| 6100                        | TRISE            | 31:16     | —     | —     | —     | —     | —     | —     | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | TRISE9 | TRISE8 | TRISE7 | TRISE6 | TRISE5 | TRISE4 | TRISE3 | TRISE2 | TRISE1 | TRISE0 | 03FF       |
| 6110                        | PORTE            | 31:16     | —     | —     | —     | —     | —     | —     | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | RE9    | RE8    | RE7    | RE6    | RE5    | RE4    | RE3    | RE2    | RE1    | RE0    | xxxx       |
| 6120                        | LATE             | 31:16     | —     | —     | —     | —     | —     | —     | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | LATE9  | LATE8  | LATE7  | LATE6  | LATE5  | LATE4  | LATE3  | LATE2  | LATE1  | LATE0  | xxxx       |
| 6130                        | ODCE             | 31:16     | —     | —     | —     | —     | —     | —     | —      | —      | —      | —      | —      | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | ODCE9  | ODCE8  | ODCE7  | ODCE6  | ODCE5  | ODCE4  | ODCE3  | ODCE2  | ODCE1  | ODCE0  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-32: PORT F REGISTER MAP FOR PIC32MX575F256H, PIC32MX575F512H, PIC32MX675F512H, PIC32MX695F512H, AND PIC32MX795F512H DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |      |      |      |      |        |        |        |      |        | All Resets |      |
|-----------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|------|------|------|------|--------|--------|--------|------|--------|------------|------|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5   | 20/4   | 19/3   | 18/2 | 17/1   |            | 16/0 |
| 6140                        | TRISF            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —      | —      | —      | —    | —      | —          | 0000 |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | TRISF5 | TRISF4 | TRISF3 | —    | TRISF1 | TRISF0     | 003B |
| 6150                        | PORTF            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —      | —      | —      | —    | —      | —          | 0000 |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | RF5    | RF4    | RF3    | —    | RF1    | RF0        | xxxx |
| 6160                        | LATF             | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —      | —      | —      | —    | —      | —          | 0000 |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | LATF5  | LATF4  | LATF3  | —    | LATF1  | LATF0      | xxxx |
| 6170                        | ODCF             | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —      | —      | —      | —    | —      | —          | 0000 |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | ODCF5  | ODCF4  | ODCF3  | —    | ODCF1  | ODCF0      | 0000 |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-33: PORT F REGISTER MAP FOR PIC32MX575F256L, PIC32MX575F512L, PIC32MX675F512L, PIC32MX695F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits  |       |         |         |       |       |      |        |      |      |        |        |        |        |        | All Resets |
|-----------------------------|------------------|-----------|-------|-------|---------|---------|-------|-------|------|--------|------|------|--------|--------|--------|--------|--------|------------|
|                             |                  |           | 31/15 | 30/14 | 29/13   | 28/12   | 27/11 | 26/10 | 25/9 | 24/8   | 23/7 | 22/6 | 21/5   | 20/4   | 19/3   | 18/2   | 17/1   |            |
| 6140                        | TRISF            | 31:16     | —     | —     | —       | —       | —     | —     | —    | —      | —    | —    | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | TRISF13 | TRISF12 | —     | —     | —    | TRISF8 | —    | —    | TRISF5 | TRISF4 | TRISF3 | TRISF2 | TRISF1 | TRISF0     |
| 6150                        | PORTF            | 31:16     | —     | —     | —       | —       | —     | —     | —    | —      | —    | —    | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | RF13    | RF12    | —     | —     | —    | RF8    | —    | —    | RF5    | RF4    | RF3    | RF2    | RF1    | RF0        |
| 6160                        | LATF             | 31:16     | —     | —     | —       | —       | —     | —     | —    | —      | —    | —    | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | LATF13  | LATF12  | —     | —     | —    | LATF8  | —    | —    | LATF5  | LATF4  | LATF3  | LATF2  | LATF1  | LATF0      |
| 6170                        | ODCF             | 31:16     | —     | —     | —       | —       | —     | —     | —    | —      | —    | —    | —      | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | —     | —     | ODCF13  | ODCF12  | —     | —     | —    | ODCF8  | —    | —    | ODCF5  | ODCF4  | ODCF3  | ODCF2  | ODCF1  | ODCF0      |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-34: PORT G REGISTER MAP FOR PIC32MX575F256H, PIC32MX575F512H, PIC32MX675F512H, PIC32MX695F512H, AND PIC32MX795F512H DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |        |        |        |        |      |      |        |        |      |      | All Resets |
|-----------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|------|------|--------|--------|------|------|------------|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9   | 24/8   | 23/7   | 22/6   | 21/5 | 20/4 | 19/3   | 18/2   | 17/1 | 16/0 |            |
| 6180                        | TRISG            | 31:16     | —     | —     | —     | —     | —     | —     | —      | —      | —      | —      | —    | —    | —      | —      | —    | —    | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | TRISG9 | TRISG8 | TRISG7 | TRISG6 | —    | —    | TRISG3 | TRISG2 | —    | —    | 03CC       |
| 6190                        | PORTG            | 31:16     | —     | —     | —     | —     | —     | —     | —      | —      | —      | —      | —    | —    | —      | —      | —    | —    | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | RG9    | RG8    | RG7    | RG6    | —    | —    | RG3    | RG2    | —    | —    | xxxx       |
| 61A0                        | LATG             | 31:16     | —     | —     | —     | —     | —     | —     | —      | —      | —      | —      | —    | —    | —      | —      | —    | —    | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | LATG9  | LATG8  | LATG7  | LATG6  | —    | —    | LATG3  | LATG2  | —    | —    | xxxx       |
| 61B0                        | ODCG             | 31:16     | —     | —     | —     | —     | —     | —     | —      | —      | —      | —      | —    | —    | —      | —      | —    | —    | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | ODCG9  | ODCG8  | ODCG7  | ODCG6  | —    | —    | ODCG3  | ODCG2  | —    | —    | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-35: PORT G REGISTER MAP FOR PIC32MX575F256L, PIC32MX575F512L, PIC32MX675F512L, PIC32MX695F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits    |         |         |         |       |       |        |        |        |        |      |      |        |        |        |        | All Resets |
|-----------------------------|------------------|-----------|---------|---------|---------|---------|-------|-------|--------|--------|--------|--------|------|------|--------|--------|--------|--------|------------|
|                             |                  |           | 31/15   | 30/14   | 29/13   | 28/12   | 27/11 | 26/10 | 25/9   | 24/8   | 23/7   | 22/6   | 21/5 | 20/4 | 19/3   | 18/2   | 17/1   | 16/0   |            |
| 6180                        | TRISG            | 31:16     | —       | —       | —       | —       | —     | —     | —      | —      | —      | —      | —    | —    | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | TRISG15 | TRISG14 | TRISG13 | TRISG12 | —     | —     | TRISG9 | TRISG8 | TRISG7 | TRISG6 | —    | —    | TRISG3 | TRISG2 | TRISG1 | TRISG0 | F3CF       |
| 6190                        | PORTG            | 31:16     | —       | —       | —       | —       | —     | —     | —      | —      | —      | —      | —    | —    | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | RG15    | RG14    | RG13    | RG12    | —     | —     | RG9    | RG8    | RG7    | RG6    | —    | —    | RG3    | RG2    | RG1    | RG0    | xxxx       |
| 61A0                        | LATG             | 31:16     | —       | —       | —       | —       | —     | —     | —      | —      | —      | —      | —    | —    | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | LATG15  | LATG14  | LATG13  | LATG12  | —     | —     | LATG9  | LATG8  | LATG7  | LATG6  | —    | —    | LATG3  | LATG2  | LATG1  | LATG0  | xxxx       |
| 61B0                        | ODCG             | 31:16     | —       | —       | —       | —       | —     | —     | —      | —      | —      | —      | —    | —    | —      | —      | —      | —      | 0000       |
|                             |                  | 15:0      | ODCG15  | ODCG14  | ODCG13  | ODCG12  | —     | —     | ODCG9  | ODCG8  | ODCG7  | ODCG6  | —    | —    | ODCG3  | ODCG2  | ODCG1  | ODCG0  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-36: CHANGE NOTICE AND PULL-UP REGISTER MAP FOR PIC32MX575F256L, PIC32MX575F512L, PIC32MX675F512L, PIC32MX695F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits    |         |         |         |         |         |        |        |        |        |         |         |         |         |         |         | All Resets |
|-----------------------------|------------------|-----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|---------|---------|---------|---------|---------|---------|------------|
|                             |                  |           | 31/15   | 30/14   | 29/13   | 28/12   | 27/11   | 26/10   | 25/9   | 24/8   | 23/7   | 22/6   | 21/5    | 20/4    | 19/3    | 18/2    | 17/1    | 16/0    |            |
| 61C0                        | CNCON            | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —       | —       | —       | —       | —       | —       | 0000       |
|                             |                  | 15:0      | ON      | FRZ     | SIDL    | —       | —       | —       | —      | —      | —      | —      | —       | —       | —       | —       | —       | —       | 0000       |
| 61D0                        | CNEN             | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | CNEN21  | CNEN20  | CNEN19  | CNEN18  | CNEN17  | CNEN16  | 0000       |
|                             |                  | 15:0      | CNEN15  | CNEN14  | CNEN13  | CNEN12  | CNEN11  | CNEN10  | CNEN9  | CNEN8  | CNEN7  | CNEN6  | CNEN5   | CNEN4   | CNEN3   | CNEN2   | CNEN1   | CNEN0   | 0000       |
| 61E0                        | CNPUE            | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | CNPUE21 | CNPUE20 | CNPUE19 | CNPUE18 | CNPUE17 | CNPUE16 | 0000       |
|                             |                  | 15:0      | CNPUE15 | CNPUE14 | CNPUE13 | CNPUE12 | CNPUE11 | CNPUE10 | CNPUE9 | CNPUE8 | CNPUE7 | CNPUE6 | CNPUE5  | CNPUE4  | CNPUE3  | CNPUE2  | CNPUE1  | CNPUE0  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See Section 12.1.1 “CLR, SET and INV Registers” for more information.

**TABLE 4-37: CHANGE NOTICE AND PULL-UP REGISTER MAP FOR PIC32MX575F256H, PIC32MX575F512H, PIC32MX675F512H, PIC32MX695F512H, AND PIC32MX795F512H DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits    |         |         |         |         |         |        |        |        |        |        |        |        |         |         |         | All Resets |
|-----------------------------|------------------|-----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|------------|
|                             |                  |           | 31/15   | 30/14   | 29/13   | 28/12   | 27/11   | 26/10   | 25/9   | 24/8   | 23/7   | 22/6   | 21/5   | 20/4   | 19/3   | 18/2    | 17/1    | 16/0    |            |
| 61C0                        | CNCON            | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —       | —       | —       | 0000       |
|                             |                  | 15:0      | ON      | FRZ     | SIDL    | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | —       | —       | —       | 0000       |
| 61D0                        | CNEN             | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | CNEN18  | CNEN17  | CNEN16  | 0000       |
|                             |                  | 15:0      | CNEN15  | CNEN14  | CNEN13  | CNEN12  | CNEN11  | CNEN10  | CNEN9  | CNEN8  | CNEN7  | CNEN6  | CNEN5  | CNEN4  | CNEN3  | CNEN2   | CNEN1   | CNEN0   | 0000       |
| 61E0                        | CNPUE            | 31:16     | —       | —       | —       | —       | —       | —       | —      | —      | —      | —      | —      | —      | —      | CNPUE18 | CNPUE17 | CNPUE16 | 0000       |
|                             |                  | 15:0      | CNPUE15 | CNPUE14 | CNPUE13 | CNPUE12 | CNPUE11 | CNPUE10 | CNPUE9 | CNPUE8 | CNPUE7 | CNPUE6 | CNPUE5 | CNPUE4 | CNPUE3 | CNPUE2  | CNPUE1  | CNPUE0  | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See Section 12.1.1 “CLR, SET and INV Registers” for more information.

**TABLE 4-38: PARALLEL MASTER PORT REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits          |           |            |             |           |        |        |           |          |            |      |            |      |      |            |      | All Resets |
|-----------------------------|------------------|-----------|---------------|-----------|------------|-------------|-----------|--------|--------|-----------|----------|------------|------|------------|------|------|------------|------|------------|
|                             |                  |           | 31/15         | 30/14     | 29/13      | 28/12       | 27/11     | 26/10  | 25/9   | 24/8      | 23/7     | 22/6       | 21/5 | 20/4       | 19/3 | 18/2 | 17/1       | 16/0 |            |
| 7000                        | PMCON            | 31:16     | —             | —         | —          | —           | —         | —      | —      | —         | —        | —          | —    | —          | —    | —    | —          | 0000 |            |
|                             |                  | 15:0      | ON            | FRZ       | SIDL       | ADRMUX<1:0> |           | PMPTTL | PTWREN | PTRDEN    | CSF<1:0> |            | ALP  | CS2P       | CS1P | —    | WRSP       | RDSP | 0000       |
| 7010                        | PMMODE           | 31:16     | —             | —         | —          | —           | —         | —      | —      | —         | —        | —          | —    | —          | —    | —    | —          | 0000 |            |
|                             |                  | 15:0      | BUSY          |           | IRQM<1:0>  |             | INCM<1:0> |        | MODE16 | MODE<1:0> |          | WAITB<1:0> |      | WAITM<3:0> |      |      | WAITE<1:0> |      | 0000       |
| 7020                        | PMADDR           | 31:16     | —             | —         | —          | —           | —         | —      | —      | —         | —        | —          | —    | —          | —    | —    | —          | 0000 |            |
|                             |                  | 15:0      | CS2EN/A15     | CS1EN/A14 | ADDR<13:0> |             |           |        |        |           |          |            |      |            |      |      |            |      | 0000       |
| 7030                        | PMDOUT           | 31:16     | DATAOUT<31:0> |           |            |             |           |        |        |           |          |            |      |            |      |      |            |      | 0000       |
|                             |                  | 15:0      |               |           |            |             |           |        |        |           |          |            |      |            |      |      |            |      | 0000       |
| 7040                        | PMDIN            | 31:16     | DATAIN<31:0>  |           |            |             |           |        |        |           |          |            |      |            |      |      |            |      | 0000       |
|                             |                  | 15:0      |               |           |            |             |           |        |        |           |          |            |      |            |      |      |            |      | 0000       |
| 7050                        | PMAEN            | 31:16     | —             | —         | —          | —           | —         | —      | —      | —         | —        | —          | —    | —          | —    | —    | —          | 0000 |            |
|                             |                  | 15:0      | PTEN<15:0>    |           |            |             |           |        |        |           |          |            |      |            |      |      |            |      | 0000       |
| 7060                        | PMSTAT           | 31:16     | —             | —         | —          | —           | —         | —      | —      | —         | —        | —          | —    | —          | —    | —    | —          | 0000 |            |
|                             |                  | 15:0      | IBF           | IBOV      | —          | —           | IB3F      | IB2F   | IB1F   | IB0F      | OBE      | OBUF       | —    | —          | OB3E | OB2E | OB1E       | OB0E | 0080       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-39: PROGRAMMING AND DIAGNOSTICS REGISTER MAP**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |      |      |      |      |      |      |        |       |      |      | All Resets |
|-----------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|--------|-------|------|------|------------|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4 | 19/3   | 18/2  | 17/1 | 16/0 |            |
| F200                        | DDPCON           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —      | —     | —    | —    | 0000       |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | JTAGEN | TROEN | —    | —    | 0008       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-40: PREFETCH REGISTER MAP**

| Virtual Address<br>(BF88_#) | Register<br>Name        | Bit Range | Bits           |       |       |       |       |       |               |      |             |      |             |             |        |            |       | All Resets |      |      |
|-----------------------------|-------------------------|-----------|----------------|-------|-------|-------|-------|-------|---------------|------|-------------|------|-------------|-------------|--------|------------|-------|------------|------|------|
|                             |                         |           | 31/15          | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9          | 24/8 | 23/7        | 22/6 | 21/5        | 20/4        | 19/3   | 18/2       | 17/1  |            | 16/0 |      |
| 4000                        | CHECON <sup>(1,2)</sup> | 31:16     | —              | —     | —     | —     | —     | —     | —             | —    | —           | —    | —           | —           | —      | —          | —     | CHECOH     | 0000 |      |
|                             |                         | 15:0      | —              | —     | —     | —     | —     | —     | DCSZ<1:0>     |      | —           | —    | PREFEN<1:0> |             | —      | PFMWS<2:0> |       |            | 0000 |      |
| 4010                        | CHEACC <sup>(1)</sup>   | 31:16     | CHEWEN         | —     | —     | —     | —     | —     | —             | —    | —           | —    | —           | —           | —      | —          | —     | —          | 0000 |      |
|                             |                         | 15:0      | —              | —     | —     | —     | —     | —     | —             | —    | —           | —    | —           | CHEIDX<3:0> |        |            |       |            | 0000 |      |
| 4020                        | CHETAG <sup>(1)</sup>   | 31:16     | LTAGBOOT       | —     | —     | —     | —     | —     | —             | —    | LTAG<23:16> |      |             |             |        |            |       |            |      | 00xx |
|                             |                         | 15:0      | LTAG<15:4>     |       |       |       |       |       |               |      |             |      |             |             | LVALID | LLOCK      | LTYPE | —          | xxx0 |      |
| 4030                        | CHEMSK <sup>(1)</sup>   | 31:16     | —              | —     | —     | —     | —     | —     | —             | —    | —           | —    | —           | —           | —      | —          | —     | —          | 0000 |      |
|                             |                         | 15:0      | LMASK<15:5>    |       |       |       |       |       |               |      |             |      |             | —           | —      | —          | —     | —          | 0000 |      |
| 4040                        | CHEW0                   | 31:16     | CHEW0<31:0>    |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
|                             |                         | 15:0      | CHEW0<31:0>    |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
| 4050                        | CHEW1                   | 31:16     | CHEW1<31:0>    |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
|                             |                         | 15:0      | CHEW1<31:0>    |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
| 4060                        | CHEW2                   | 31:16     | CHEW2<31:0>    |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
|                             |                         | 15:0      | CHEW2<31:0>    |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
| 4070                        | CHEW3                   | 31:16     | CHEW3<31:0>    |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
|                             |                         | 15:0      | CHEW3<31:0>    |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
| 4080                        | CHELRU                  | 31:16     | —              | —     | —     | —     | —     | —     | CHELRU<24:16> |      |             |      |             |             |        |            |       |            |      | 0000 |
|                             |                         | 15:0      | CHELRU<15:0>   |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | 0000 |      |
| 4090                        | CHEHIT                  | 31:16     | CHEHIT<31:0>   |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
|                             |                         | 15:0      | CHEHIT<31:0>   |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
| 40A0                        | CHEMIS                  | 31:16     | CHEMIS<31:0>   |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
|                             |                         | 15:0      | CHEMIS<31:0>   |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
| 40C0                        | CHEPFABT                | 31:16     | CHEPFABT<31:0> |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |
|                             |                         | 15:0      | CHEPFABT<31:0> |       |       |       |       |       |               |      |             |      |             |             |        |            |       |            | xxxx |      |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note** 1: This register has corresponding CLR, SET, and INV Registers at its virtual address, plus an offset of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.  
 2: Reset value is dependent on DEVCFGx configuration.

**TABLE 4-41: RTCC REGISTER MAP<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits        |       |       |          |             |       |          |      |              |           |      |      |              |         |         |       | All Resets |
|-----------------------------|------------------|-----------|-------------|-------|-------|----------|-------------|-------|----------|------|--------------|-----------|------|------|--------------|---------|---------|-------|------------|
|                             |                  |           | 31/15       | 30/14 | 29/13 | 28/12    | 27/11       | 26/10 | 25/9     | 24/8 | 23/7         | 22/6      | 21/5 | 20/4 | 19/3         | 18/2    | 17/1    | 16/0  |            |
| 0200                        | RTCCON           | 31:16     | —           | —     | —     | —        | —           | —     | CAL<9:0> |      |              |           |      |      |              |         |         |       | 0000       |
|                             |                  | 15:0      | ON          | FRZ   | SIDL  | —        | —           | —     | —        | —    | RTSECSEL     | RTCCLKON  | —    | —    | RTCWREN      | RTCSYNC | HALFSEC | RTCOE | 0000       |
| 0210                        | RTCALRM          | 31:16     | —           | —     | —     | —        | —           | —     | —        | —    | —            | —         | —    | —    | —            | —       | —       | —     | 0000       |
|                             |                  | 15:0      | ALRMEN      | CHIME | PIV   | ALRMSYNC | AMASK<3:0>  |       |          |      |              | ARPT<7:0> |      |      |              |         |         |       | 0000       |
| 0220                        | RTCTIME          | 31:16     | HR10<3:0>   |       |       |          | HR01<3:0>   |       |          |      | MIN10<3:0>   |           |      |      | MIN01<3:0>   |         |         |       | xxxx       |
|                             |                  | 15:0      | SEC10<3:0>  |       |       |          | SEC01<3:0>  |       |          |      | —            | —         | —    | —    | —            | —       | —       | —     | xx00       |
| 0230                        | RTCDATE          | 31:16     | YEAR10<3:0> |       |       |          | YEAR01<3:0> |       |          |      | MONTH10<3:0> |           |      |      | MONTH01<3:0> |         |         |       | xxxx       |
|                             |                  | 15:0      | DAY10<3:0>  |       |       |          | DAY01<3:0>  |       |          |      | —            | —         | —    | —    | WDAY01<3:0>  |         |         |       | xx00       |
| 0240                        | ALRMTIME         | 31:16     | HR10<3:0>   |       |       |          | HR01<3:0>   |       |          |      | MIN10<3:0>   |           |      |      | MIN01<3:0>   |         |         |       | xxxx       |
|                             |                  | 15:0      | SEC10<3:0>  |       |       |          | SEC01<3:0>  |       |          |      | —            | —         | —    | —    | —            | —       | —       | —     | xx00       |
| 0250                        | ALRMDATE         | 31:16     | —           | —     | —     | —        | —           | —     | —        | —    | MONTH10<3:0> |           |      |      | MONTH01<3:0> |         |         |       | 00xx       |
|                             |                  | 15:0      | DAY10<3:0>  |       |       |          | DAY01<3:0>  |       |          |      | —            | —         | —    | —    | WDAY01<3:0>  |         |         |       | xx0x       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-42: DEVCFG: DEVICE CONFIGURATION WORD SUMMARY**

| Virtual Address<br>(BFC0_#) | Register<br>Name | Bit Range | Bits         |          |             |       |       |               |        |             |      |               |            |         |          |               |            | All Resets |      |
|-----------------------------|------------------|-----------|--------------|----------|-------------|-------|-------|---------------|--------|-------------|------|---------------|------------|---------|----------|---------------|------------|------------|------|
|                             |                  |           | 31/15        | 30/14    | 29/13       | 28/12 | 27/11 | 26/10         | 25/9   | 24/8        | 23/7 | 22/6          | 21/5       | 20/4    | 19/3     | 18/2          | 17/1       |            | 16/0 |
| 2FF0                        | DEVCFG3          | 31:16     | FVBUSIO      | FUSBIDIO | FSCMIO      | —     | —     | FCANIO        | FETHIO | FMIEN       | —    | —             | —          | —       | —        | FSRSSEL<2:0>  |            | xxxx       |      |
|                             |                  | 15:0      | USERID<15:0> |          |             |       |       |               |        |             |      |               |            |         |          |               |            | xxxx       |      |
| 2FF4                        | DEVCFG2          | 31:16     | —            | —        | —           | —     | —     | —             | —      | —           | —    | —             | —          | —       | —        | FPLLODIV<2:0> |            | xxxx       |      |
|                             |                  | 15:0      | FUPLLEN      | —        | —           | —     | —     | FUPLLDIV<2:0> |        |             | —    | FPLLMULT<2:0> |            |         | —        | FPLLDIV<2:0>  |            | xxxx       |      |
| 2FF8                        | DEVCFG1          | 31:16     | —            | —        | —           | —     | —     | —             | —      | FWDTEN      | —    | —             | WDTPS<4:0> |         |          |               | xxxx       |            |      |
|                             |                  | 15:0      | FCKSM<1:0>   |          | FPBDIV<1:0> |       | —     | OSCIOFNC      |        | POSCMD<1:0> |      | IESO          | —          | FSOSCEN |          | —             | —          | FNOSC<2:0> |      |
| 2FFC                        | DEVCFG0          | 31:16     | —            | —        | —           | CP    | —     | —             | —      | BWP         | —    | —             | —          | —       | PWP<7:4> |               |            |            | xxxx |
|                             |                  | 15:0      | PWP<3:0>     |          |             |       | —     | —             | —      | —           | —    | —             | —          | —       | ICESSEL  | —             | DEBUG<1:0> |            | xxxx |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-43: DEVICE AND REVISION ID SUMMARY<sup>(1)</sup>**

| Virtual Address<br>(BF80_#) | Register<br>Name | Bit Range | Bits        |       |       |       |              |       |      |      |      |      |      |      |      |      |      | All Resets |
|-----------------------------|------------------|-----------|-------------|-------|-------|-------|--------------|-------|------|------|------|------|------|------|------|------|------|------------|
|                             |                  |           | 31/15       | 30/14 | 29/13 | 28/12 | 27/11        | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4 | 19/3 | 18/2 | 17/1 |            |
| F220                        | DEVID            | 31:16     | VER<3:0>    |       |       |       | DEVID<27:16> |       |      |      |      |      |      |      |      |      |      | xxxx       |
|                             |                  | 15:0      | DEVID<15:0> |       |       |       |              |       |      |      |      |      |      |      |      |      |      | xxxx       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** Reset values are dependent on the device variant. Refer to the "PIC32MX5XX/6XX/7XX Family Silicon Errata and Data Sheet Clarification" (DS80480) for more information.

TABLE 4-44: USB REGISTER MAP

| Virtual Address<br>(BF88-#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |      |      |              |              |                   |          |         |          |                 |                | All Resets   |
|-----------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|------|------|--------------|--------------|-------------------|----------|---------|----------|-----------------|----------------|--------------|
|                             |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7         | 22/6         | 21/5              | 20/4     | 19/3    | 18/2     | 17/1            | 16/0           |              |
| 5040                        | U1OTGIR          | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | IDIF         | T1MSECIF     | LSTATEIF          | ACTVIF   | SESVDIF | SESENDIF | —               | VBUSVDIF       | 0000         |
| 5050                        | U1OTGIE          | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | IDIE         | T1MSECIE     | LSTATEIE          | ACTVIE   | SESVDIE | SESENDIE | —               | VBUSVDIE       | 0000         |
| 5060                        | U1OTGSTAT        | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | ID           | —            | LSTATE            | —        | SESVD   | SESEND   | —               | VBUSVD         | 0000         |
| 5070                        | U1OTGCON         | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | DPPULUP      | DMPULUP      | DPPULDWN          | DMPULDWN | VBUSON  | OTGEN    | VBUSCHG         | VBUSDIS        | 0000         |
| 5080                        | U1PWRC           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | UACTPND      | —            | —                 | USLPGRD  | USBBUSY | —        | USUSPEND        | USBPWR         | 0000         |
| 5200                        | U1IR             | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | STALLIF      | ATTACHIF     | RESUMEIF          | IDLEIF   | TRNIF   | SOFIF    | UERRIF          | URSTIF         | 0000         |
| 5210                        | U1IE             | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | STALLIE      | ATTACHIE     | RESUMEIE          | IDLEIE   | TRNIE   | SOFIE    | UERRIE          | URSTIE         | 0000         |
| 5220                        | U1EIR            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | BTSEF        | BMXEF        | DMAEF             | BTOEF    | DFN8EF  | CRC16EF  | CRC5EF<br>EOFEF | PIDEF          | 0000<br>0000 |
| 5230                        | U1EIE            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | BTSEE        | BMXEE        | DMAEE             | BTOEE    | DFN8EE  | CRC16EE  | CRC5EE<br>EOFEE | PIDEE          | 0000<br>0000 |
| 5240                        | U1STAT           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | ENDPT<3:0>   |              |                   |          | DIR     | PPBI     | —               | —              | 0000         |
| 5250                        | U1CON            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | JSTATE       | SE0          | PKTDIS<br>TOKBUSY | USBRST   | HOSTEN  | RESUME   | PPBRST          | USBEN<br>SOFEN | 0000<br>0000 |
| 5260                        | U1ADDR           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | LSPDEN       | DEVADDR<6:0> |                   |          |         |          |                 |                | 0000         |
| 5270                        | U1BDTP1          | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —            | —                 | —        | —       | —        | —               | —              | 0000         |
|                             |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | BDTPTRL<7:1> |              |                   |          |         |          |                 | —              | 0000         |

Legend: x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

TABLE 4-44: USB REGISTER MAP (CONTINUED)

| Virtual Address<br>(BF98..#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |      |      |              |          |        |          |           |        |         |          | All Resets |
|------------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|------|------|--------------|----------|--------|----------|-----------|--------|---------|----------|------------|
|                              |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7         | 22/6     | 21/5   | 20/4     | 19/3      | 18/2   | 17/1    | 16/0     |            |
| 5280                         | U1FRML           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | FRML<7:0>    |          |        |          |           |        |         |          | 0000       |
| 5290                         | U1FRMH           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | FRMH<2:0> |        |         |          | 0000       |
| 52A0                         | U1TOK            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | PID<3:0>     |          |        |          | EP<3:0>   |        |         |          | 0000       |
| 52B0                         | U1SOF            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | CNT<7:0>     |          |        |          |           |        |         |          | 0000       |
| 52C0                         | U1BDTP2          | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | BDTPTRH<7:0> |          |        |          |           |        |         |          | 0000       |
| 52D0                         | U1BDTP3          | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | BDTPTRU<7:0> |          |        |          |           |        |         |          | 0000       |
| 52E0                         | U1CNFG1          | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | UTEYE        | UOEMON   | USBFRZ | USBSIDL  | —         | —      | —       | UASUSPND | 0001       |
| 5300                         | U1EP0            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | LSPD         | RETRYDIS | —      | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK   | 0000       |
| 5310                         | U1EP1            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK   | 0000       |
| 5320                         | U1EP2            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK   | 0000       |
| 5330                         | U1EP3            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK   | 0000       |
| 5340                         | U1EP4            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK   | 0000       |
| 5350                         | U1EP5            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK   | 0000       |
| 5360                         | U1EP6            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK   | 0000       |
| 5370                         | U1EP7            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK   | 0000       |
| 5380                         | U1EP8            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | —        | —         | —      | —       | —        | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —            | —        | —      | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK   | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

TABLE 4-44: USB REGISTER MAP (CONTINUED)

| Virtual Address<br>(BF98..#) | Register<br>Name | Bit Range | Bits  |       |       |       |       |       |      |      |      |      |      |          |        |        |         |       | All Resets |
|------------------------------|------------------|-----------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|----------|--------|--------|---------|-------|------------|
|                              |                  |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4     | 19/3   | 18/2   | 17/1    | 16/0  |            |
| 5390                         | U1EP9            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —        | —      | —      | —       | —     | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK | 0000       |
| 53A0                         | U1EP10           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —        | —      | —      | —       | —     | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK | 0000       |
| 53B0                         | U1EP11           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —        | —      | —      | —       | —     | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK | 0000       |
| 53C0                         | U1EP12           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —        | —      | —      | —       | —     | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK | 0000       |
| 53D0                         | U1EP13           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —        | —      | —      | —       | —     | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK | 0000       |
| 53E0                         | U1EP14           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —        | —      | —      | —       | —     | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK | 0000       |
| 53F0                         | U1EP15           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —        | —      | —      | —       | —     | 0000       |
|                              |                  | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-45: CAN1 REGISTER SUMMARY FOR PIC32MX575F256H, PIC32MX575F512H, PIC32MX795F512H, PIC32MX575F256L, PIC32MX575F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register Name | Bit Range | Bits           |             |             |             |             |            |          |          |            |             |          |            |             |             |            |          | All Resets |
|-----------------------------|---------------|-----------|----------------|-------------|-------------|-------------|-------------|------------|----------|----------|------------|-------------|----------|------------|-------------|-------------|------------|----------|------------|
|                             |               |           | 31/15          | 30/14       | 29/13       | 28/12       | 27/11       | 26/10      | 25/9     | 24/8     | 23/7       | 22/6        | 21/5     | 20/4       | 19/3        | 18/2        | 17/1       | 16/0     |            |
| B000                        | C1CON         | 31:16     | —              | —           | —           | —           | ABAT        | REQOP<2:0> |          |          | OPMOD<2:0> |             |          | CANCAP     | —           | —           | —          | —        | 0400       |
|                             |               | 15:0      | ON             | —           | SIDLE       | —           | BUSY        | —          | —        | —        | —          | —           | —        | DNCNT<4:0> |             |             |            |          | 0000       |
| B010                        | C1CFG         | 31:16     | —              | —           | —           | —           | —           | —          | —        | —        | —          | WAKFIL      | —        | —          | —           | SEG2PH<2:0> |            |          | 0000       |
|                             |               | 15:0      | SEG2PHTS       | SAM         | SEG1PH<2:0> |             |             | PRSEG<2:0> |          |          | SJW<1:0>   |             | BRP<5:0> |            |             |             |            | 0000     |            |
| B020                        | C1INT         | 31:16     | IVRIE          | WAKIE       | CERRIE      | SERRIE      | RBOVIE      | —          | —        | —        | —          | —           | —        | —          | MODIE       | CTMRIE      | RBIE       | TBIE     | 0000       |
|                             |               | 15:0      | IVRIF          | WAKIF       | CERRIF      | SERRIF      | RBOVIF      | —          | —        | —        | —          | —           | —        | —          | MODIF       | CTMRIF      | RBIF       | TBIF     | 0000       |
| B030                        | C1VEC         | 31:16     | —              | —           | —           | —           | —           | —          | —        | —        | —          | —           | —        | —          | —           | —           | —          | —        | 0000       |
|                             |               | 15:0      | —              | —           | —           | FILHIT<4:0> |             |            |          |          | —          | ICOD<6:0>   |          |            |             |             | 0000       |          |            |
| B040                        | C1TREC        | 31:16     | —              | —           | —           | —           | —           | —          | —        | —        | —          | —           | TXBO     | TXBP       | RXBP        | TXWARN      | RXWARN     | EWARN    | 0000       |
|                             |               | 15:0      | TEC<7:0>       |             |             |             |             |            |          |          | REC<7:0>   |             |          |            |             |             |            |          | 0000       |
| B050                        | C1FSTAT       | 31:16     | FIFOIP31       | FIFOIP30    | FIFOIP29    | FIFOIP28    | FIFOIP27    | FIFOIP26   | FIFOIP25 | FIFOIP24 | FIFOIP23   | FIFOIP22    | FIFOIP21 | FIFOIP20   | FIFOIP19    | FIFOIP18    | FIFOIP17   | FIFOIP16 | 0000       |
|                             |               | 15:0      | FIFOIP15       | FIFOIP14    | FIFOIP13    | FIFOIP12    | FIFOIP11    | FIFOIP10   | FIFOIP9  | FIFOIP8  | FIFOIP7    | FIFOIP6     | FIFOIP5  | FIFOIP4    | FIFOIP3     | FIFOIP2     | FIFOIP1    | FIFOIP0  | 0000       |
| B060                        | C1RXOVF       | 31:16     | RXOVF31        | RXOVF30     | RXOVF29     | RXOVF28     | RXOVF27     | RXOVF26    | RXOVF25  | RXOVF24  | RXOVF23    | RXOVF22     | RXOVF21  | RXOVF20    | RXOVF19     | RXOVF18     | RXOVF17    | RXOVF16  | 0000       |
|                             |               | 15:0      | RXOVF15        | RXOVF14     | RXOVF13     | RXOVF12     | RXOVF11     | RXOVF10    | RXOVF9   | RXOVF8   | RXOVF7     | RXOVF6      | RXOVF5   | RXOVF4     | RXOVF3      | RXOVF2      | RXOVF1     | RXOVF0   | 0000       |
| B070                        | C1TMR         | 31:16     | CANTS<15:0>    |             |             |             |             |            |          |          |            |             |          |            |             |             |            |          | 0000       |
|                             |               | 15:0      | CANTSPRE<15:0> |             |             |             |             |            |          |          |            |             |          |            |             |             |            | 0000     |            |
| B080                        | C1RXM0        | 31:16     | SID<10:0>      |             |             |             |             |            |          |          |            |             |          | —          | MIDE        | —           | EID<17:16> |          | xxxx       |
|                             |               | 15:0      | EID<15:0>      |             |             |             |             |            |          |          |            |             |          |            |             |             |            |          | xxxx       |
| B090                        | C1RXM1        | 31:16     | SID<10:0>      |             |             |             |             |            |          |          |            |             |          | —          | MIDE        | —           | EID<17:16> |          | xxxx       |
|                             |               | 15:0      | EID<15:0>      |             |             |             |             |            |          |          |            |             |          |            |             |             |            |          | xxxx       |
| B0A0                        | C1RXM2        | 31:16     | SID<10:0>      |             |             |             |             |            |          |          |            |             |          | —          | MIDE        | —           | EID<17:16> |          | xxxx       |
|                             |               | 15:0      | EID<15:0>      |             |             |             |             |            |          |          |            |             |          |            |             |             |            |          | xxxx       |
| B0B0                        | C1RXM3        | 31:16     | SID<10:0>      |             |             |             |             |            |          |          |            |             |          | —          | MIDE        | —           | EID<17:16> |          | xxxx       |
|                             |               | 15:0      | EID<15:0>      |             |             |             |             |            |          |          |            |             |          |            |             |             |            |          | xxxx       |
| B0C0                        | C1FLTCON0     | 31:16     | FLTEN3         | MSEL3<1:0>  |             |             | FSEL3<4:0>  |            |          |          | FLTEN2     | MSEL2<1:0>  |          |            | FSEL2<4:0>  |             |            |          | 0000       |
|                             |               | 15:0      | FLTEN1         | MSEL1<1:0>  |             |             | FSEL1<4:0>  |            |          |          | FLTEN0     | MSEL0<1:0>  |          |            | FSEL0<4:0>  |             |            |          | 0000       |
| B0D0                        | C1FLTCON1     | 31:16     | FLTEN7         | MSEL7<1:0>  |             |             | FSEL7<4:0>  |            |          |          | FLTEN6     | MSEL6<1:0>  |          |            | FSEL6<4:0>  |             |            |          | 0000       |
|                             |               | 15:0      | FLTEN5         | MSEL5<1:0>  |             |             | FSEL5<4:0>  |            |          |          | FLTEN4     | MSEL4<1:0>  |          |            | FSEL4<4:0>  |             |            |          | 0000       |
| B0E0                        | C1FLTCON2     | 31:16     | FLTEN11        | MSEL11<1:0> |             |             | FSEL11<4:0> |            |          |          | FLTEN10    | MSEL10<1:0> |          |            | FSEL10<4:0> |             |            |          | 0000       |
|                             |               | 15:0      | FLTEN9         | MSEL9<1:0>  |             |             | FSEL9<4:0>  |            |          |          | FLTEN8     | MSEL8<1:0>  |          |            | FSEL8<4:0>  |             |            |          | 0000       |
| B0F0                        | C1FLTCON3     | 31:16     | FLTEN15        | MSEL15<1:0> |             |             | FSEL15<4:0> |            |          |          | FLTEN14    | MSEL14<1:0> |          |            | FSEL14<4:0> |             |            |          | 0000       |
|                             |               | 15:0      | FLTEN13        | MSEL13<1:0> |             |             | FSEL13<4:0> |            |          |          | FLTEN12    | MSEL12<1:0> |          |            | FSEL12<4:0> |             |            |          | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-45: CAN1 REGISTER SUMMARY FOR PIC32MX575F256H, PIC32MX575F512H, PIC32MX795F512H, PIC32MX575F256L, PIC32MX575F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name         | Bit Range | Bits           |             |             |       |       |           |          |           |             |             |               |       |          |            |            | All Resets     |      |
|-----------------------------|--------------------------|-----------|----------------|-------------|-------------|-------|-------|-----------|----------|-----------|-------------|-------------|---------------|-------|----------|------------|------------|----------------|------|
|                             |                          |           | 31/15          | 30/14       | 29/13       | 28/12 | 27/11 | 26/10     | 25/9     | 24/8      | 23/7        | 22/6        | 21/5          | 20/4  | 19/3     | 18/2       | 17/1       |                | 16/0 |
| B100                        | C1FLTCON4                | 31:16     | FLTEN19        | MSEL19<1:0> | FSEL19<4:0> |       |       |           |          | FLTEN18   | MSEL18<1:0> | FSEL18<4:0> |               |       |          |            | 0000       |                |      |
|                             |                          | 15:0      | FLTEN17        | MSEL17<1:0> | FSEL17<4:0> |       |       |           |          | FLTEN16   | MSEL16<1:0> | FSEL16<4:0> |               |       |          |            | 0000       |                |      |
| B110                        | C1FLTCON5                | 31:16     | FLTEN23        | MSEL23<1:0> | FSEL23<4:0> |       |       |           |          | FLTEN22   | MSEL22<1:0> | FSEL22<4:0> |               |       |          |            | 0000       |                |      |
|                             |                          | 15:0      | FLTEN21        | MSEL21<1:0> | FSEL21<4:0> |       |       |           |          | FLTEN20   | MSEL20<1:0> | FSEL20<4:0> |               |       |          |            | 0000       |                |      |
| B120                        | C1FLTCON6                | 31:16     | FLTEN27        | MSEL27<1:0> | FSEL27<4:0> |       |       |           |          | FLTEN26   | MSEL26<1:0> | FSEL26<4:0> |               |       |          |            | 0000       |                |      |
|                             |                          | 15:0      | FLTEN25        | MSEL25<1:0> | FSEL25<4:0> |       |       |           |          | FLTEN24   | MSEL24<1:0> | FSEL24<4:0> |               |       |          |            | 0000       |                |      |
| B130                        | C1FLTCON7                | 31:16     | FLTEN31        | MSEL31<1:0> | FSEL31<4:0> |       |       |           |          | FLTEN30   | MSEL30<1:0> | FSEL30<4:0> |               |       |          |            | 0000       |                |      |
|                             |                          | 15:0      | FLTEN29        | MSEL29<1:0> | FSEL29<4:0> |       |       |           |          | FLTEN28   | MSEL28<1:0> | FSEL28<4:0> |               |       |          |            | 0000       |                |      |
| B140                        | C1RXFn<br>(n = 0-31)     | 31:16     | SID<10:0>      |             |             |       |       |           |          |           |             | —           |               | EXID  | —        |            | EID<17:16> | xxxx           |      |
|                             |                          | 15:0      | EID<15:0>      |             |             |       |       |           |          |           |             |             |               |       |          |            |            | xxxx           |      |
| B340                        | C1FIFOBA                 | 31:16     | C1FIFOBA<31:0> |             |             |       |       |           |          |           |             |             |               |       |          |            |            | 0000           |      |
|                             |                          | 15:0      |                |             |             |       |       |           |          |           |             |             |               |       |          |            |            | 0000           |      |
| B350                        | C1FIFOCONn<br>(n = 0-31) | 31:16     | —              | —           | —           | —     | —     | —         | —        | —         | —           | FSIZE<4:0>  |               |       |          |            | 0000       |                |      |
|                             |                          | 15:0      | —              | FRESET      | UINC        | DONLY | —     | —         | —        | TXEN      | TXABAT      | TXLARB      | TXERR         | TXREQ | RTREN    | TXPRI<1:0> |            | 0000           |      |
| B360                        | C1FIFOINTn<br>(n = 0-31) | 31:16     | —              | —           | —           | —     | —     | TXNFULLIE | TXHALFIE | TXEMPTYIE | —           | —           | —             | —     | RXOVFLIE | RXFULLIE   | RXHALFIE   | RXN<br>EMPTYIE | 0000 |
|                             |                          | 15:0      | —              | —           | —           | —     | —     | TXNFULLIF | TXHALFIF | TXEMPTYIF | —           | —           | —             | —     | RXOVFLIF | RXFULLIF   | RXHALFIF   | RXN<br>EMPTYIF | 0000 |
| B370                        | C1FIFOUAn<br>(n = 0-31)  | 31:16     | C1FIFOUA<31:0> |             |             |       |       |           |          |           |             |             |               |       |          |            |            | 0000           |      |
|                             |                          | 15:0      |                |             |             |       |       |           |          |           |             |             |               |       |          |            |            | 0000           |      |
| B380                        | C1FIFOCIn<br>(n = 0-31)  | 31:16     | —              | —           | —           | —     | —     | —         | —        | —         | —           | —           | —             | —     | —        | —          | —          | 0000           |      |
|                             |                          | 15:0      | —              | —           | —           | —     | —     | —         | —        | —         | —           | —           | C1FIFOCI<4:0> |       |          |            |            | 0000           |      |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.

**TABLE 4-46: CAN2 REGISTER SUMMARY FOR PIC32MX795F512H AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits           |             |             |             |          |            |          |          |             |           |             |            |          |             |            |          | All Resets |
|-----------------------------|------------------|-----------|----------------|-------------|-------------|-------------|----------|------------|----------|----------|-------------|-----------|-------------|------------|----------|-------------|------------|----------|------------|
|                             |                  |           | 31/15          | 30/14       | 29/13       | 28/12       | 27/11    | 26/10      | 25/9     | 24/8     | 23/7        | 22/6      | 21/5        | 20/4       | 19/3     | 18/2        | 17/1       | 16/0     |            |
| C000                        | C2CON            | 31:16     | —              | —           | —           | —           | ABAT     | REQOP<2:0> |          |          | OPMOD<2:0>  |           |             | CANCAP     | —        | —           | —          | —        | 0400       |
|                             |                  | 15:0      | ON             | —           | SIDLE       | —           | BUSY     | —          | —        | —        | —           | —         | —           | DNCNT<4:0> |          |             |            | 0000     |            |
| C010                        | C2CFG            | 31:16     | —              | —           | —           | —           | —        | —          | —        | —        | —           | WAKFIL    | —           | —          | —        | SEG2PH<2:0> |            |          | 0000       |
|                             |                  | 15:0      | SEG2PHTS       | SAM         | SEG1PH<2:0> |             |          | PRSEG<2:0> |          |          | SJW<1:0>    |           | BRP<5:0>    |            |          |             |            | 0000     |            |
| C020                        | C2INT            | 31:16     | IVRIE          | WAKIE       | CERRIE      | SERRIE      | RBOVIE   | —          | —        | —        | —           | —         | —           | —          | MODIE    | CTMRIE      | RBIE       | TBIE     | 0000       |
|                             |                  | 15:0      | IVRIF          | WAKIF       | CERRIF      | SERRIF      | RBOVIF   | —          | —        | —        | —           | —         | —           | —          | MODIF    | CTMRIF      | RBIF       | TBIF     | 0000       |
| C030                        | C2VEC            | 31:16     | —              | —           | —           | —           | —        | —          | —        | —        | —           | —         | —           | —          | —        | —           | —          | —        | 0000       |
|                             |                  | 15:0      | —              | —           | —           | FILHIT<4:0> |          |            |          |          | —           | ICOD<6:0> |             |            |          |             |            | 0000     |            |
| C040                        | C2TREC           | 31:16     | —              | —           | —           | —           | —        | —          | —        | —        | —           | —         | TXBO        | TXBP       | RXBP     | TXWARN      | RXWARN     | EWARN    | 0000       |
|                             |                  | 15:0      | TEC<7:0>       |             |             |             |          |            |          |          | REC<7:0>    |           |             |            |          |             |            |          | 0000       |
| C050                        | C2FSTAT          | 31:16     | FIFOIP31       | FIFOIP30    | FIFOIP29    | FIFOIP28    | FIFOIP27 | FIFOIP26   | FIFOIP25 | FIFOIP24 | FIFOIP23    | FIFOIP22  | FIFOIP21    | FIFOIP20   | FIFOIP19 | FIFOIP18    | FIFOIP17   | FIFOIP16 | 0000       |
|                             |                  | 15:0      | FIFOIP15       | FIFOIP14    | FIFOIP13    | FIFOIP12    | FIFOIP11 | FIFOIP10   | FIFOIP9  | FIFOIP8  | FIFOIP7     | FIFOIP6   | FIFOIP5     | FIFOIP4    | FIFOIP3  | FIFOIP2     | FIFOIP1    | FIFOIP0  | 0000       |
| C060                        | C2RXOVF          | 31:16     | RXOVF31        | RXOVF30     | RXOVF29     | RXOVF28     | RXOVF27  | RXOVF26    | RXOVF25  | RXOVF24  | RXOVF23     | RXOVF22   | RXOVF21     | RXOVF20    | RXOVF19  | RXOVF18     | RXOVF17    | RXOVF16  | 0000       |
|                             |                  | 15:0      | RXOVF15        | RXOVF14     | RXOVF13     | RXOVF12     | RXOVF11  | RXOVF10    | RXOVF9   | RXOVF8   | RXOVF7      | RXOVF6    | RXOVF5      | RXOVF4     | RXOVF3   | RXOVF2      | RXOVF1     | RXOVF0   | 0000       |
| C070                        | C2TMR            | 31:16     | CANTS<15:0>    |             |             |             |          |            |          |          |             |           |             |            |          |             |            |          | 0000       |
|                             |                  | 15:0      | CANTSPRE<15:0> |             |             |             |          |            |          |          |             |           |             |            |          |             |            | 0000     |            |
| C080                        | C2RXM0           | 31:16     | SID<10:0>      |             |             |             |          |            |          |          |             |           |             | —          | MIDE     | —           | EID<17:16> |          | xxxx       |
|                             |                  | 15:0      | EID<15:0>      |             |             |             |          |            |          |          |             |           |             |            |          |             |            |          | xxxx       |
| C0A0                        | C2RXM1           | 31:16     | SID<10:0>      |             |             |             |          |            |          |          |             |           |             | —          | MIDE     | —           | EID<17:16> |          | xxxx       |
|                             |                  | 15:0      | EID<15:0>      |             |             |             |          |            |          |          |             |           |             |            |          |             |            |          | xxxx       |
| C0B0                        | C2RXM2           | 31:16     | SID<10:0>      |             |             |             |          |            |          |          |             |           |             | —          | MIDE     | —           | EID<17:16> |          | xxxx       |
|                             |                  | 15:0      | EID<15:0>      |             |             |             |          |            |          |          |             |           |             |            |          |             |            |          | xxxx       |
| C0B0                        | C2RXM3           | 31:16     | SID<10:0>      |             |             |             |          |            |          |          |             |           |             | —          | MIDE     | —           | EID<17:16> |          | xxxx       |
|                             |                  | 15:0      | EID<15:0>      |             |             |             |          |            |          |          |             |           |             |            |          |             |            |          | xxxx       |
| C0C0                        | C2FLTCON0        | 31:16     | FLTEN3         | MSEL3<1:0>  |             | FSEL3<4:0>  |          |            |          | FLTEN2   | MSEL2<1:0>  |           | FSEL2<4:0>  |            |          |             | 0000       |          |            |
|                             |                  | 15:0      | FLTEN1         | MSEL1<1:0>  |             | FSEL1<4:0>  |          |            |          | FLTEN0   | MSEL0<1:0>  |           | FSEL0<4:0>  |            |          |             | 0000       |          |            |
| C0D0                        | C2FLTCON1        | 31:16     | FLTEN7         | MSEL7<1:0>  |             | FSEL7<4:0>  |          |            |          | FLTEN6   | MSEL6<1:0>  |           | FSEL6<4:0>  |            |          |             | 0000       |          |            |
|                             |                  | 15:0      | FLTEN5         | MSEL5<1:0>  |             | FSEL5<4:0>  |          |            |          | FLTEN4   | MSEL4<1:0>  |           | FSEL4<4:0>  |            |          |             | 0000       |          |            |
| C0E0                        | C2FLTCON2        | 31:16     | FLTEN11        | MSEL11<1:0> |             | FSEL11<4:0> |          |            |          | FLTEN10  | MSEL10<1:0> |           | FSEL10<4:0> |            |          |             | 0000       |          |            |
|                             |                  | 15:0      | FLTEN9         | MSEL9<1:0>  |             | FSEL9<4:0>  |          |            |          | FLTEN8   | MSEL8<1:0>  |           | FSEL8<4:0>  |            |          |             | 0000       |          |            |
| C0F0                        | C2FLTCON3        | 31:16     | FLTEN15        | MSEL15<1:0> |             | FSEL15<4:0> |          |            |          | FLTEN14  | MSEL14<1:0> |           | FSEL14<4:0> |            |          |             | 0000       |          |            |
|                             |                  | 15:0      | FLTEN13        | MSEL13<1:0> |             | FSEL13<4:0> |          |            |          | FLTEN12  | MSEL12<1:0> |           | FSEL12<4:0> |            |          |             | 0000       |          |            |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-46: CAN2 REGISTER SUMMARY FOR PIC32MX795F512H AND PIC32MX795F512L DEVICES<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88..#) | Register<br>Name         | Bit Range | Bits           |             |             |       |       |           |          |           |             |             |               |       |          |            |          | All Resets     |      |
|------------------------------|--------------------------|-----------|----------------|-------------|-------------|-------|-------|-----------|----------|-----------|-------------|-------------|---------------|-------|----------|------------|----------|----------------|------|
|                              |                          |           | 31/15          | 30/14       | 29/13       | 28/12 | 27/11 | 26/10     | 25/9     | 24/8      | 23/7        | 22/6        | 21/5          | 20/4  | 19/3     | 18/2       | 17/1     |                | 16/0 |
| C100                         | C2FLTCON4                | 31:16     | FLTEN19        | MSEL19<1:0> | FSEL19<4:0> |       |       |           |          | FLTEN18   | MSEL18<1:0> | FSEL18<4:0> |               |       |          |            | 0000     |                |      |
|                              |                          | 15:0      | FLTEN17        | MSEL17<1:0> | FSEL17<4:0> |       |       |           |          | FLTEN16   | MSEL16<1:0> | FSEL16<4:0> |               |       |          |            | 0000     |                |      |
| C110                         | C2FLTCON5                | 31:16     | FLTEN23        | MSEL23<1:0> | FSEL23<4:0> |       |       |           |          | FLTEN22   | MSEL22<1:0> | FSEL22<4:0> |               |       |          |            | 0000     |                |      |
|                              |                          | 15:0      | FLTEN21        | MSEL21<1:0> | FSEL21<4:0> |       |       |           |          | FLTEN20   | MSEL20<1:0> | FSEL20<4:0> |               |       |          |            | 0000     |                |      |
| C120                         | C2FLTCON6                | 31:16     | FLTEN27        | MSEL27<1:0> | FSEL27<4:0> |       |       |           |          | FLTEN26   | MSEL26<1:0> | FSEL26<4:0> |               |       |          |            | 0000     |                |      |
|                              |                          | 15:0      | FLTEN25        | MSEL25<1:0> | FSEL25<4:0> |       |       |           |          | FLTEN24   | MSEL24<1:0> | FSEL24<4:0> |               |       |          |            | 0000     |                |      |
| C130                         | C2FLTCON7                | 31:16     | FLTEN31        | MSEL31<1:0> | FSEL31<4:0> |       |       |           |          | FLTEN30   | MSEL30<1:0> | FSEL30<4:0> |               |       |          |            | 0000     |                |      |
|                              |                          | 15:0      | FLTEN29        | MSEL29<1:0> | FSEL29<4:0> |       |       |           |          | FLTEN28   | MSEL28<1:0> | FSEL28<4:0> |               |       |          |            | 0000     |                |      |
| C140                         | C2RXFn<br>(n = 0-31)     | 31:16     | SID<10:0>      |             |             |       |       |           |          |           |             |             | ---           |       | EXID     | ---        |          | EID<17:16>     | xxxx |
|                              |                          | 15:0      | EID<15:0>      |             |             |       |       |           |          |           |             |             |               |       |          |            |          |                | xxxx |
| C340                         | C2FIFOBA                 | 31:16     | C2FIFOBA<31:0> |             |             |       |       |           |          |           |             |             |               |       |          |            |          |                | 0000 |
|                              |                          | 15:0      | C2FIFOBA<31:0> |             |             |       |       |           |          |           |             |             |               |       |          |            |          |                | 0000 |
| C350                         | C2FIFOCONn<br>(n = 0-31) | 31:16     | ---            | ---         | ---         | ---   | ---   | ---       | ---      | ---       | ---         | FSIZE<4:0>  |               |       |          |            |          | 0000           |      |
|                              |                          | 15:0      | ---            | FRESET      | UINC        | DONLY | ---   | ---       | ---      | TXEN      | TXABAT      | TXLARB      | TXERR         | TXREQ | RTREN    | TXPRI<1:0> |          | 0000           |      |
| C360                         | C2FIFOINTn<br>(n = 0-31) | 31:16     | ---            | ---         | ---         | ---   | ---   | TXNFULLIE | TXHALFIE | TXEMPTYIE | ---         | ---         | ---           | ---   | RXOVFLIE | RXFULLIE   | RXHALFIE | RXN<br>EMPTYIE | 0000 |
|                              |                          | 15:0      | ---            | ---         | ---         | ---   | ---   | TXNFULLIF | TXHALFIF | TXEMPTYIF | ---         | ---         | ---           | ---   | RXOVFLIF | RXFULLIF   | RXHALFIF | RXN<br>EMPTYIF | 0000 |
| C370                         | C2FIFOUAn<br>(n = 0-31)  | 31:16     | C2FIFOUA<31:0> |             |             |       |       |           |          |           |             |             |               |       |          |            |          |                | 0000 |
|                              |                          | 15:0      | C2FIFOUA<31:0> |             |             |       |       |           |          |           |             |             |               |       |          |            |          |                | 0000 |
| C380                         | C2FIFOCIn<br>(n = 0-31)  | 31:16     | ---            | ---         | ---         | ---   | ---   | ---       | ---      | ---       | ---         | ---         | ---           | ---   | ---      | ---        | ---      | ---            | 0000 |
|                              |                          | 15:0      | ---            | ---         | ---         | ---   | ---   | ---       | ---      | ---       | ---         | ---         | C2FIFOCI<4:0> |       |          |            |          |                | 0000 |

**Legend:** x = unknown value on Reset; --- = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.

**TABLE 4-47: ETHERNET CONTROLLER REGISTER SUMMARY FOR PIC32MX675F512H, PIC32MX695F512H, PIC32MX795F512H, PIC32MX695F512L, PIC32MX675F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup>**

| Virtual Address<br>(BF88_#) | Register<br>Name | Bit Range | Bits            |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | All Resets |
|-----------------------------|------------------|-----------|-----------------|--------------|--------------|-------|-------------|--------------|--------------|--------------|--------------|---------------|---------------|--------|--------------|---------------|---------------|---------------|------------|
|                             |                  |           | 31/15           | 30/14        | 29/13        | 28/12 | 27/11       | 26/10        | 25/9         | 24/8         | 23/7         | 22/6          | 21/5          | 20/4   | 19/3         | 18/2          | 17/1          | 16/0          |            |
| 9000                        | ETHCON1          | 31:16     | PTV<15:0>       |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
|                             |                  | 15:0      | ON              | FRZ          | SIDL         | —     | —           | —            | TXRTS        | RXEN         | AUTOFC       | —             | —             | MANFC  | —            | —             | —             | BUFCDEC       | 0000       |
| 9010                        | ETHCON2          | 31:16     | —               | —            | —            | —     | —           | —            | —            | —            | —            | —             | —             | —      | —            | —             | —             | —             | 0000       |
|                             |                  | 15:0      | —               | —            | —            | —     | —           | RXBUFSZ<6:0> |              |              |              |               |               |        | —            | —             | —             | —             | 0000       |
| 9020                        | ETHTXST          | 31:16     | TXSTADDR<31:16> |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
|                             |                  | 15:0      | TXSTADDR<15:2>  |              |              |       |             |              |              |              |              |               |               |        |              |               |               | —             | —          |
| 9030                        | ETHRXST          | 31:16     | RXSTADDR<31:16> |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
|                             |                  | 15:0      | RXSTADDR<15:2>  |              |              |       |             |              |              |              |              |               |               |        |              |               |               | —             | —          |
| 9040                        | ETHHT0           | 31:16     | HT<31:0>        |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
|                             |                  | 15:0      |                 |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
| 9050                        | ETHHT1           | 31:16     | HT<63:32>       |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
|                             |                  | 15:0      |                 |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
| 9060                        | ETHPMM0          | 31:16     | PMM<31:0>       |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
|                             |                  | 15:0      |                 |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
| 9070                        | ETHPMM1          | 31:16     | PMM<63:32>      |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
|                             |                  | 15:0      |                 |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
| 9080                        | ETHPMCS          | 31:16     | —               | —            | —            | —     | —           | —            | —            | —            | —            | —             | —             | —      | —            | —             | —             | —             | 0000       |
|                             |                  | 15:0      | PMCS<15:0>      |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
| 9090                        | ETHPMO           | 31:16     | —               | —            | —            | —     | —           | —            | —            | —            | —            | —             | —             | —      | —            | —             | —             | —             | 0000       |
|                             |                  | 15:0      | PMO<15:0>       |              |              |       |             |              |              |              |              |               |               |        |              |               |               |               | 0000       |
| 90A0                        | ETHRXFC          | 31:16     | —               | —            | —            | —     | —           | —            | —            | —            | —            | —             | —             | —      | —            | —             | —             | —             | 0000       |
|                             |                  | 15:0      | HTEN            | MPEN         | —            | NOTPM | PMMODE<3:0> |              |              |              | CRC<br>ERREN | CRC<br>OKEN   | RUNT<br>ERREN | RUNTEN | UCEN         | NOT<br>MEEN   | MCEN          | BCEN          | 0000       |
| 90B0                        | ETHRXWM          | 31:16     | —               | —            | —            | —     | —           | —            | —            | RXFWM<7:0>   |              |               |               |        |              |               |               |               | 0000       |
|                             |                  | 15:0      | —               | —            | —            | —     | —           | —            | —            | RXEWM<7:0>   |              |               |               |        |              |               |               |               | 0000       |
| 90C0                        | ETHIEN           | 31:16     | —               | —            | —            | —     | —           | —            | —            | —            | —            | —             | —             | —      | —            | —             | —             | —             | 0000       |
|                             |                  | 15:0      | —               | TX<br>BUSEIE | RX<br>BUSEIE | —     | —           | —            | EW<br>MARKIE | FW<br>MARKIE | RX<br>DONEIE | PK<br>TPENDIE | RX<br>ACTIE   | —      | TX<br>DONEIE | TX<br>ABORTIE | RX<br>BUFNAIE | RX<br>OVFLWIE | 0000       |
| 90D0                        | ETHIRQ           | 31:16     | —               | —            | —            | —     | —           | —            | —            | —            | —            | —             | —             | —      | —            | —             | —             | —             | 0000       |
|                             |                  | 15:0      | —               | TXBUSE       | RXBUSE       | —     | —           | —            | EWMARK       | FWMARK       | RXDONE       | PKTPEND       | RXACT         | —      | TXDONE       | TXABORT       | RXBUFNA       | RXOVFLW       | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

- Note 1:** All registers in this table (with the exception of ETHSTAT) have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.
- Note 2:** Reset values default to the factory programmed value.

**TABLE 4-47: ETHERNET CONTROLLER REGISTER SUMMARY FOR PIC32MX675F512H, PIC32MX695F512H, PIC32MX795F512H, PIC32MX695F512L, PIC32MX675F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88..#) | Register<br>Name     | Bit Range | Bits             |                  |               |         |               |               |               |               |                |                  |               |               |          |           |          |          | All Resets |
|------------------------------|----------------------|-----------|------------------|------------------|---------------|---------|---------------|---------------|---------------|---------------|----------------|------------------|---------------|---------------|----------|-----------|----------|----------|------------|
|                              |                      |           | 31/15            | 30/14            | 29/13         | 28/12   | 27/11         | 26/10         | 25/9          | 24/8          | 23/7           | 22/6             | 21/5          | 20/4          | 19/3     | 18/2      | 17/1     | 16/0     |            |
| 90E0                         | ETHSTAT              | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | BUFCNT<7:0>    |                  |               |               |          |           |          |          | 0000       |
|                              |                      | 15:0      | —                | —                | —             | —       | —             | —             | —             | —             | BUSY           | TXBUSY           | RXBUSY        | —             | —        | —         | —        | —        | 0000       |
| 9100                         | ETH<br>RXOV-<br>FLOW | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | RXOVFLWCNT<15:0> |                  |               |         |               |               |               |               |                |                  |               |               |          |           |          |          | 0000       |
| 9110                         | ETH<br>FRMTXOK       | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | FRMTXOKCNT<15:0> |                  |               |         |               |               |               |               |                |                  |               |               |          |           |          |          | 0000       |
| 9120                         | ETH<br>SCOLFRM       | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | SCOLFRMCNT<15:0> |                  |               |         |               |               |               |               |                |                  |               |               |          |           |          |          | 0000       |
| 9130                         | ETH<br>MCOLFRM       | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | MCOLFRMCNT<15:0> |                  |               |         |               |               |               |               |                |                  |               |               |          |           |          |          | 0000       |
| 9140                         | ETH<br>FRMRXOK       | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | FRMRXOKCNT<15:0> |                  |               |         |               |               |               |               |                |                  |               |               |          |           |          |          | 0000       |
| 9150                         | ETH<br>FCSERR        | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | FCSERRCNT<15:0>  |                  |               |         |               |               |               |               |                |                  |               |               |          |           |          |          | 0000       |
| 9160                         | ETH<br>ALGNERR       | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | ALGNERRCNT<15:0> |                  |               |         |               |               |               |               |                |                  |               |               |          |           |          |          | 0000       |
| 9200                         | EMACx<br>CFG1        | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | SOFT<br>RESET    | SIM<br>RESET     | —             | —       | RESET<br>RMCS | RESET<br>RFUN | RESET<br>TMCS | RESET<br>TFUN | —              | —                | —             | LOOPBACK      | TXPAUSE  | RXPAUSE   | PASSALL  | RXENABLE | 800D       |
| 9210                         | EMACx<br>CFG2        | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | —                | EXCESS<br>DFR    | BP<br>NOBKOFF | NOBKOFF | —             | —             | LONGPRE       | PUREPRE       | AUTOPAD        | VLANPAD          | PAD<br>ENABLE | CRC<br>ENABLE | DELAYCRC | HUGEFRM   | LENGTHCK | FULLDPLX | 4082       |
| 9220                         | EMACx<br>IPGT        | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | —                | —                | —             | —       | —             | —             | —             | —             | B2BIPKTGP<6:0> |                  |               |               |          |           |          |          | 0012       |
| 9230                         | EMACx<br>IPGR        | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | —                | NB2BIPKTGP1<6:0> |               |         |               |               |               |               | —              | NB2BIPKTGP2<6:0> |               |               |          |           |          |          | 0C12       |
| 9240                         | EMACx<br>CLRT        | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | —                | —                | CWINDOW<5:0>  |         |               |               |               |               |                | —                | —             | —             | —        | RETX<3:0> |          |          | 370F       |
| 9250                         | EMACx<br>MAXF        | 31:16     | —                | —                | —             | —       | —             | —             | —             | —             | —              | —                | —             | —             | —        | —         | —        | —        | 0000       |
|                              |                      | 15:0      | MACMAXF<15:0>    |                  |               |         |               |               |               |               |                |                  |               |               |          |           |          |          | 05EE       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

- Note** 1: All registers in this table (with the exception of ETHSTAT) have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 "CLR, SET and INV Registers"** for more information.
- 2: Reset values default to the factory programmed value.

**TABLE 4-47: ETHERNET CONTROLLER REGISTER SUMMARY FOR PIC32MX675F512H, PIC32MX695F512H, PIC32MX795F512H, PIC32MX695F512L, PIC32MX675F512L, AND PIC32MX795F512L DEVICES<sup>(1)</sup> (CONTINUED)**

| Virtual Address<br>(BF88..#) | Register Name            | Bit Range | Bits          |       |       |              |            |       |      |            |               |      |             |              |          |          |           |          | All Resets |
|------------------------------|--------------------------|-----------|---------------|-------|-------|--------------|------------|-------|------|------------|---------------|------|-------------|--------------|----------|----------|-----------|----------|------------|
|                              |                          |           | 31/15         | 30/14 | 29/13 | 28/12        | 27/11      | 26/10 | 25/9 | 24/8       | 23/7          | 22/6 | 21/5        | 20/4         | 19/3     | 18/2     | 17/1      | 16/0     |            |
| 9260                         | EMACx SUPP               | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | 0000       |
|                              |                          | 15:0      | —             | —     | —     | —            | RESET RMII | —     | —    | SPEED RMII | —             | —    | —           | —            | —        | —        | —         | —        | 1000       |
| 9270                         | EMACx TEST               | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | 0000       |
|                              |                          | 15:0      | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | TESTBP   | TESTPAUSE | SHRTQNTA | 0000       |
| 9280                         | EMACx MCFG               | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | 0000       |
|                              |                          | 15:0      | RESET MGMT    | —     | —     | —            | —          | —     | —    | —          | —             | —    | CLKSEL<3:0> |              |          |          | NOPRE     | SCANINC  | 0020       |
| 9290                         | EMACx MCMD               | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | 0000       |
|                              |                          | 15:0      | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | SCAN      | READ     | 0000       |
| 92A0                         | EMACx MADR               | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | 0000       |
|                              |                          | 15:0      | —             | —     | —     | PHYADDR<4:0> |            |       |      |            | —             | —    | —           | REGADDR<4:0> |          |          |           |          | 0100       |
| 92B0                         | EMACx MWTD               | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | 0000       |
|                              |                          | 15:0      | MWTD<15:0>    |       |       |              |            |       |      |            |               |      |             |              |          |          |           |          | 0000       |
| 92C0                         | EMACx MRDD               | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | 0000       |
|                              |                          | 15:0      | MRDD<15:0>    |       |       |              |            |       |      |            |               |      |             |              |          |          |           |          | 0000       |
| 92D0                         | EMACx MIND               | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | 0000       |
|                              |                          | 15:0      | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | LINKFAIL | NOTVALID | SCAN      | MIIMBUSY | 0000       |
| 9300                         | EMACx SA0 <sup>(2)</sup> | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | XXXX       |
|                              |                          | 15:0      | STNADDR6<7:0> |       |       |              |            |       |      |            | STNADDR5<7:0> |      |             |              |          |          |           |          | XXXX       |
| 9310                         | EMACx SA1 <sup>(2)</sup> | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | XXXX       |
|                              |                          | 15:0      | STNADDR4<7:0> |       |       |              |            |       |      |            | STNADDR3<7:0> |      |             |              |          |          |           |          | XXXX       |
| 9320                         | EMACx SA2 <sup>(2)</sup> | 31:16     | —             | —     | —     | —            | —          | —     | —    | —          | —             | —    | —           | —            | —        | —        | —         | —        | XXXX       |
|                              |                          | 15:0      | STNADDR2<7:0> |       |       |              |            |       |      |            | STNADDR1<7:0> |      |             |              |          |          |           |          | XXXX       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

- Note 1:** All registers in this table (with the exception of ETHSTAT) have corresponding CLR, SET, and INV Registers at their virtual addresses, plus offsets of 0x4, 0x8, and 0xC, respectively. See **Section 12.1.1 “CLR, SET and INV Registers”** for more information.
- 2:** Reset values default to the factory programmed value.

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 5.0 FLASH PROGRAM MEMORY

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 5. “Flash Program Memory”** (DS61121) in the *“PIC32MX Family Reference Manual”*, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

PIC32MX5XX/6XX/7XX devices contain an internal Flash program memory for executing user code. There are three methods by which the user can program this memory:

1. Run-Time Self Programming (RTSP)
2. EJTAG Programming
3. In-Circuit Serial Programming™ (ICSP™)

RTSP is performed by software executing from either Flash or RAM memory. Information about RTSP techniques is available in **Section 5. “Flash Program Memory”** (DS61121) in the *“PIC32MX Family Reference Manual”*.

EJTAG is performed using the EJTAG port of the device and an EJTAG capable programmer.

ICSP is performed using a serial data connection to the device and allows much faster programming times than RTSP.

The EJTAG and ICSP methods are described in the *“PIC32MX Flash Programming Specification”* (DS61145), which can be downloaded from the Microchip web site.

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 6.0 RESETS

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 7. “Resets”** (DS61118) in the *“PIC32MX Family Reference Manual”*, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).


**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

The Reset module combines all Reset sources and controls the device Master Reset signal, SYSRST. The following is a list of device Reset sources:

- POR: Power-on Reset
- MCLR: Master Clear Reset Pin
- SWR: Software Reset
- WDTR: Watchdog Timer Reset
- BOR: Brown-out Reset
- CMR: Configuration Mismatch Reset

A simplified block diagram of the Reset module is shown in Figure 6-1.

**FIGURE 6-1: SYSTEM RESET BLOCK DIAGRAM**

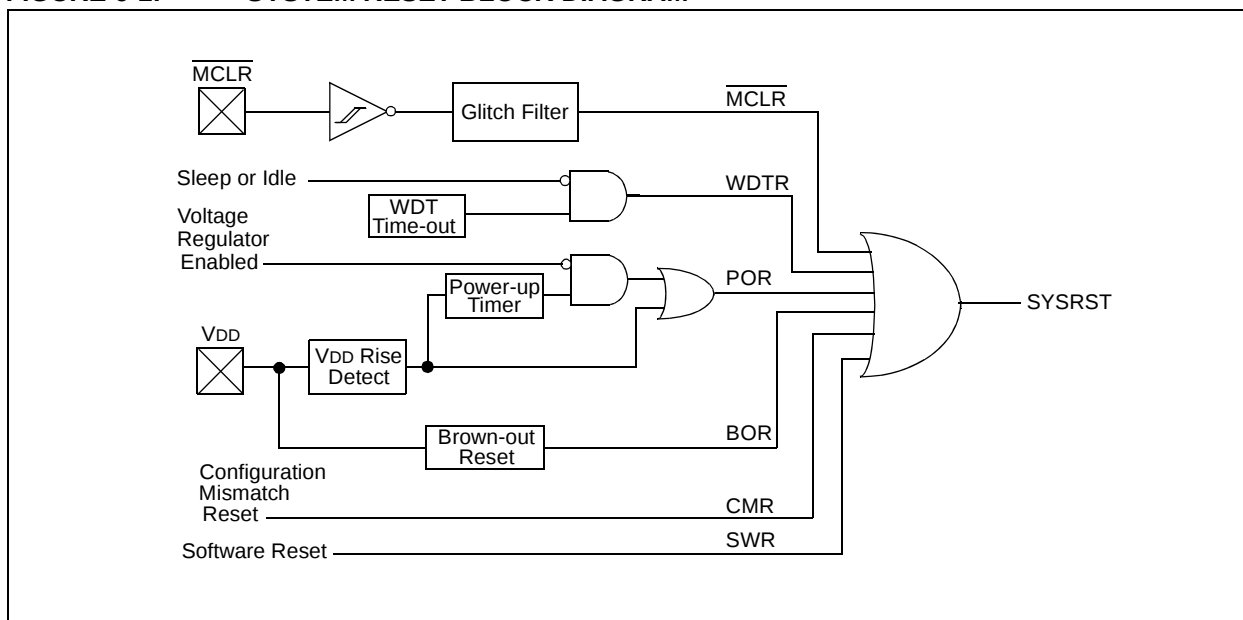

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 7.0 INTERRUPT CONTROLLER

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 8. “Interrupt Controller”** (DS61108) in the “*PIC32MX Family Reference Manual*”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).


**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

The PIC32MX5XX/6XX/7XX interrupt module includes the following features:

- Up to 96 Interrupt Sources
- Up to 64 Interrupt Vectors
- Single and Multi-Vector mode Operations
- Five External Interrupts with Edge Polarity Control
- Interrupt Proximity Timer
- Module Freeze in Debug mode
- Seven User-Selectable Priority Levels for each Vector
- Four User-Selectable Subpriority Levels within each Priority
- Dedicated Shadow Set for User-Selectable Priority Level
- Software can Generate any Interrupt
- User-Configurable Interrupt Vector Table Location
- User-Configurable Interrupt Vector Spacing

PIC32MX5XX/6XX/7XX devices generate interrupt requests in response to interrupt events from peripheral modules. The interrupt control module exists externally to the CPU logic and prioritizes the interrupt events before presenting them to the CPU.

**FIGURE 7-1: INTERRUPT CONTROLLER MODULE**

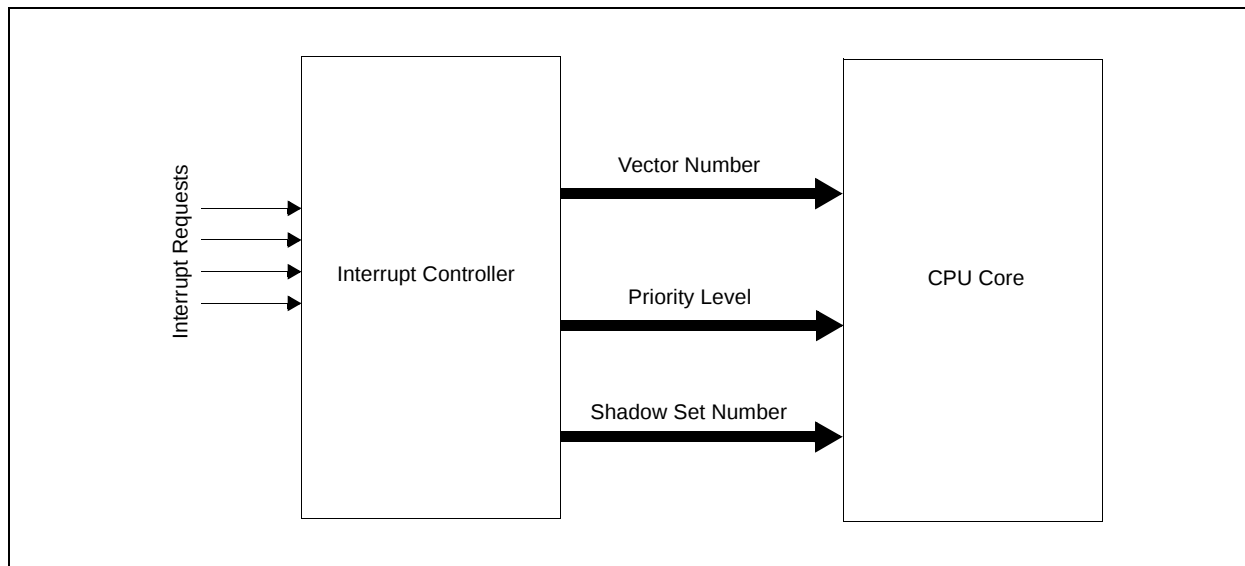

# PIC32MX5XX/6XX/7XX

**TABLE 7-1: INTERRUPT IRQ, VECTOR, AND BIT LOCATION**

| Interrupt Source <sup>(1)</sup>    | IRQ | Vector Number | Interrupt Bit Location |          |             |              |
|------------------------------------|-----|---------------|------------------------|----------|-------------|--------------|
|                                    |     |               | Flag                   | Enable   | Priority    | Sub-Priority |
| Highest Natural Order Priority     |     |               |                        |          |             |              |
| CT – Core Timer Interrupt          | 0   | 0             | IFS0<0>                | IEC0<0>  | IPC0<4:2>   | IPC0<1:0>    |
| CS0 – Core Software Interrupt 0    | 1   | 1             | IFS0<1>                | IEC0<1>  | IPC0<12:10> | IPC0<9:8>    |
| CS1 – Core Software Interrupt 1    | 2   | 2             | IFS0<2>                | IEC0<2>  | IPC0<20:18> | IPC0<17:16>  |
| INT0 – External Interrupt 0        | 3   | 3             | IFS0<3>                | IEC0<3>  | IPC0<28:26> | IPC0<25:24>  |
| T1 – Timer1                        | 4   | 4             | IFS0<4>                | IEC0<4>  | IPC1<4:2>   | IPC1<1:0>    |
| IC1 – Input Capture 1              | 5   | 5             | IFS0<5>                | IEC0<5>  | IPC1<12:10> | IPC1<9:8>    |
| OC1 – Output Compare 1             | 6   | 6             | IFS0<6>                | IEC0<6>  | IPC1<20:18> | IPC1<17:16>  |
| INT1 – External Interrupt 1        | 7   | 7             | IFS0<7>                | IEC0<7>  | IPC1<28:26> | IPC1<25:24>  |
| T2 – Timer2                        | 8   | 8             | IFS0<8>                | IEC0<8>  | IPC2<4:2>   | IPC2<1:0>    |
| IC2 – Input Capture 2              | 9   | 9             | IFS0<9>                | IEC0<9>  | IPC2<12:10> | IPC2<9:8>    |
| OC2 – Output Compare 2             | 10  | 10            | IFS0<10>               | IEC0<10> | IPC2<20:18> | IPC2<17:16>  |
| INT2 – External Interrupt 2        | 11  | 11            | IFS0<11>               | IEC0<11> | IPC2<28:26> | IPC2<25:24>  |
| T3 – Timer3                        | 12  | 12            | IFS0<12>               | IEC0<12> | IPC3<4:2>   | IPC3<1:0>    |
| IC3 – Input Capture 3              | 13  | 13            | IFS0<13>               | IEC0<13> | IPC3<12:10> | IPC3<9:8>    |
| OC3 – Output Compare 3             | 14  | 14            | IFS0<14>               | IEC0<14> | IPC3<20:18> | IPC3<17:16>  |
| INT3 – External Interrupt 3        | 15  | 15            | IFS0<15>               | IEC0<15> | IPC3<28:26> | IPC3<25:24>  |
| T4 – Timer4                        | 16  | 16            | IFS0<16>               | IEC0<16> | IPC4<4:2>   | IPC4<1:0>    |
| IC4 – Input Capture 4              | 17  | 17            | IFS0<17>               | IEC0<17> | IPC4<12:10> | IPC4<9:8>    |
| OC4 – Output Compare 4             | 18  | 18            | IFS0<18>               | IEC0<18> | IPC4<20:18> | IPC4<17:16>  |
| INT4 – External Interrupt 4        | 19  | 19            | IFS0<19>               | IEC0<19> | IPC4<28:26> | IPC4<25:24>  |
| T5 – Timer5                        | 20  | 20            | IFS0<20>               | IEC0<20> | IPC5<4:2>   | IPC5<1:0>    |
| IC5 – Input Capture 5              | 21  | 21            | IFS0<21>               | IEC0<21> | IPC5<12:10> | IPC5<9:8>    |
| OC5 – Output Compare 5             | 22  | 22            | IFS0<22>               | IEC0<22> | IPC5<20:18> | IPC5<17:16>  |
| SPI1E – SPI1 Fault                 | 23  | 23            | IFS0<23>               | IEC0<23> | IPC5<28:26> | IPC5<25:24>  |
| SPI1RX – SPI1 Receive Done         | 24  | 23            | IFS0<24>               | IEC0<24> | IPC5<28:26> | IPC5<25:24>  |
| SPI1TX – SPI1 Transfer Done        | 25  | 23            | IFS0<25>               | IEC0<25> | IPC5<28:26> | IPC5<25:24>  |
| U1AE – UART1A Error                | 26  | 24            | IFS0<26>               | IEC0<26> | IPC6<4:2>   | IPC6<1:0>    |
| SPI1AE – SPI1A Fault               |     |               |                        |          |             |              |
| I2C1AB – I2C1A Bus Collision Event |     |               |                        |          |             |              |
| U1ARX – UART1A Receiver            | 27  | 24            | IFS0<27>               | IEC0<27> | IPC6<4:2>   | IPC6<1:0>    |
| SPI1ARX – SPI1A Receive Done       |     |               |                        |          |             |              |
| I2C1AS – I2C1A Slave Event         |     |               |                        |          |             |              |
| U1ATX – UART1A Transmitter         | 28  | 24            | IFS0<28>               | IEC0<28> | IPC6<4:2>   | IPC6<1:0>    |
| SPI1ATX – SPI1A Transfer Done      |     |               |                        |          |             |              |
| I2C1AM – I2C1A Master Event        |     |               |                        |          |             |              |
| I2C1B – I2C1 Bus Collision Event   | 29  | 25            | IFS0<29>               | IEC0<29> | IPC6<12:10> | IPC6<9:8>    |
| I2C1S – I2C1 Slave Event           | 30  | 25            | IFS0<30>               | IEC0<30> | IPC6<12:10> | IPC6<9:8>    |

**Note 1:** Not all interrupt sources are available on all devices. See TABLE 1: “PIC32MX Features” for the list of available peripherals.

# PIC32MX5XX/6XX/7XX

**TABLE 7-1: INTERRUPT IRQ, VECTOR, AND BIT LOCATION (CONTINUED)**

| Interrupt Source <sup>(1)</sup>                                                           | IRQ | Vector Number | Interrupt Bit Location |          |              |              |
|-------------------------------------------------------------------------------------------|-----|---------------|------------------------|----------|--------------|--------------|
|                                                                                           |     |               | Flag                   | Enable   | Priority     | Sub-Priority |
| I2C1M – I2C1 Master Event                                                                 | 31  | 25            | IFS0<31>               | IEC0<31> | IPC6<12:10>  | IPC6<9:8>    |
| CN – Input Change Interrupt                                                               | 32  | 26            | IFS1<0>                | IEC1<0>  | IPC6<20:18>  | IPC6<17:16>  |
| AD1 – ADC1 Convert Done                                                                   | 33  | 27            | IFS1<1>                | IEC1<1>  | IPC6<28:26>  | IPC6<25:24>  |
| PMP – Parallel Master Port                                                                | 34  | 28            | IFS1<2>                | IEC1<2>  | IPC7<4:2>    | IPC7<1:0>    |
| CMP1 – Comparator Interrupt                                                               | 35  | 29            | IFS1<3>                | IEC1<3>  | IPC7<12:10>  | IPC7<9:8>    |
| CMP2 – Comparator Interrupt                                                               | 36  | 30            | IFS1<4>                | IEC1<4>  | IPC7<20:18>  | IPC7<17:16>  |
| U2AE – UART2A Error<br>SPI2AE – SPI2A Fault<br>I2C2AB – I2C2A Bus Collision Event         | 37  | 31            | IFS1<5>                | IEC1<5>  | IPC7<28:26>  | IPC7<25:24>  |
| U2ARX – UART2A Receiver<br>SPI2ARX – SPI2A Receive Done<br>I2C2AS – I2C2A Slave Event     | 38  | 31            | IFS1<6>                | IEC1<6>  | IPC7<28:26>  | IPC7<25:24>  |
| U2ATX – UART2A Transmitter<br>SPI2ATX – SPI2A Transfer Done<br>IC2AM – I2C2A Master Event | 39  | 31            | IFS1<7>                | IEC1<7>  | IPC7<28:26>  | IPC7<25:24>  |
| U3AE – UART3A Error<br>SPI3AE – SPI3A Fault<br>I2C3AB – I2C3A Bus Collision Event         | 40  | 32            | IFS1<8>                | IEC1<8>  | IPC8<4:2>    | IPC8<1:0>    |
| U3ARX – UART3A Receiver<br>SPI3ARX – SPI3A Receive Done<br>I2C3AS – I2C3A Slave Event     | 41  | 32            | IFS1<9>                | IEC1<9>  | IPC8<4:2>    | IPC8<1:0>    |
| U3ATX – UART3A Transmitter<br>SPI3ATX – SPI3A Transfer Done<br>IC3AM – I2C3A Master Event | 42  | 32            | IFS1<10>               | IEC1<10> | IPC8<4:2>    | IPC8<1:0>    |
| I2C2B – I2C2 Bus Collision Event                                                          | 43  | 33            | IFS1<11>               | IEC1<11> | IPC8<12:10>  | IPC8<9:8>    |
| I2C2S – I2C2 Slave Event                                                                  | 44  | 33            | IFS1<12>               | IEC1<12> | IPC8<12:10>  | IPC8<9:8>    |
| I2C2M – I2C2 Master Event                                                                 | 45  | 33            | IFS1<13>               | IEC1<13> | IPC8<12:10>  | IPC8<9:8>    |
| FSCM – Fail-Safe Clock Monitor                                                            | 46  | 34            | IFS1<14>               | IEC1<14> | IPC8<20:18>  | IPC8<17:16>  |
| RTCC – Real-Time Clock                                                                    | 47  | 35            | IFS1<15>               | IEC1<15> | IPC8<28:26>  | IPC8<25:24>  |
| DMA0 – DMA Channel 0                                                                      | 48  | 36            | IFS1<16>               | IEC1<16> | IPC9<4:2>    | IPC9<1:0>    |
| DMA1 – DMA Channel 1                                                                      | 49  | 37            | IFS1<17>               | IEC1<17> | IPC9<12:10>  | IPC9<9:8>    |
| DMA2 – DMA Channel 2                                                                      | 50  | 38            | IFS1<18>               | IEC1<18> | IPC9<20:18>  | IPC9<17:16>  |
| DMA3 – DMA Channel 3                                                                      | 51  | 39            | IFS1<19>               | IEC1<19> | IPC9<28:26>  | IPC9<25:24>  |
| DMA4 – DMA Channel 4                                                                      | 52  | 40            | IFS1<20>               | IEC1<20> | IPC10<4:2>   | IPC10<1:0>   |
| DMA5 – DMA Channel 5                                                                      | 53  | 41            | IFS1<21>               | IEC1<21> | IPC10<12:10> | IPC10<9:8>   |
| DMA6 – DMA Channel 6                                                                      | 54  | 42            | IFS1<22>               | IEC1<22> | IPC10<20:18> | IPC10<17:16> |
| DMA7 – DMA Channel 7                                                                      | 55  | 43            | IFS1<23>               | IEC1<23> | IPC10<28:26> | IPC10<25:24> |
| FCE – Flash Control Event                                                                 | 56  | 44            | IFS1<24>               | IEC1<24> | IPC11<4:2>   | IPC11<1:0>   |
| USB – USB Interrupt                                                                       | 57  | 45            | IFS1<25>               | IEC1<25> | IPC11<12:10> | IPC11<9:8>   |
| CAN1 – Control Area Network 1                                                             | 58  | 46            | IFS1<26>               | IEC1<26> | IPC11<20:18> | IPC11<17:16> |
| CAN2 – Control Area Network 2                                                             | 59  | 47            | IFS1<27>               | IEC1<27> | IPC11<28:26> | IPC11<25:24> |
| ETH – Ethernet Interrupt                                                                  | 60  | 48            | IFS1<28>               | IEC1<28> | IPC12<4:2>   | IPC12<1:0>   |

**Note 1:** Not all interrupt sources are available on all devices. See TABLE 1: “PIC32MX Features” for the list of available peripherals.

# PIC32MX5XX/6XX/7XX

**TABLE 7-1: INTERRUPT IRQ, VECTOR, AND BIT LOCATION (CONTINUED)**

| Interrupt Source <sup>(1)</sup>   | IRQ | Vector Number | Interrupt Bit Location |          |              |              |
|-----------------------------------|-----|---------------|------------------------|----------|--------------|--------------|
|                                   |     |               | Flag                   | Enable   | Priority     | Sub-Priority |
| IC1E – Input Capture 1 Error      | 61  | 5             | IFS1<29>               | IEC1<29> | IPC1<12:10>  | IPC1<9:8>    |
| IC2E – Input Capture 2 Error      | 62  | 9             | IFS1<30>               | IEC1<30> | IPC2<12:10>  | IPC2<9:8>    |
| IC3E – Input Capture 3 Error      | 63  | 13            | IFS1<31>               | IEC1<31> | IPC3<12:10>  | IPC3<9:8>    |
| IC4E – Input Capture 4 Error      | 64  | 17            | IFS2<0>                | IEC2<0>  | IPC4<12:10>  | IPC4<9:8>    |
| IC4E – Input Capture 5 Error      | 65  | 21            | IFS2<1>                | IEC2<1>  | IPC5<12:10>  | IPC5<9:8>    |
| PMPE – Parallel Master Port Error | 66  | 28            | IFS2<2>                | IEC2<2>  | IPC7<4:2>    | IPC7<1:0>    |
| U1BE – UART1B Error               | 67  | 49            | IFS2<3>                | IEC2<3>  | IPC12<12:10> | IPC12<9:8>   |
| U1BRX – UART1B Receiver           | 68  | 49            | IFS2<4>                | IEC2<4>  | IPC12<12:10> | IPC12<9:8>   |
| U1BTX – UART1B Transmitter        | 69  | 49            | IFS2<5>                | IEC2<5>  | IPC12<12:10> | IPC12<9:8>   |
| U2BE – UART2B Error               | 70  | 50            | IFS2<6>                | IEC2<6>  | IPC12<20:18> | IPC12<17:16> |
| U2BRX – UART2B Receiver           | 71  | 50            | IFS2<7>                | IEC2<7>  | IPC12<20:18> | IPC12<17:16> |
| U2BTX – UART2B Transmitter        | 72  | 50            | IFS2<8>                | IEC2<8>  | IPC12<20:18> | IPC12<17:16> |
| U3BE – UART3B Error               | 73  | 51            | IFS2<9>                | IEC2<9>  | IPC12<28:26> | IPC12<25:24> |
| U3BRX – UART3B Receiver           | 74  | 51            | IFS2<10>               | IEC2<10> | IPC12<28:26> | IPC12<25:24> |
| U3BTX – UART3B Transmitter        | 75  | 51            | IFS2<11>               | IEC2<11> | IPC12<28:26> | IPC12<25:24> |
| (Reserved)                        | —   | —             | —                      | —        | —            | —            |
| Lowest Natural Order Priority     |     |               |                        |          |              |              |

**Note 1:** Not all interrupt sources are available on all devices. See TABLE 1: “PIC32MX Features” for the list of available peripherals.

## 8.0 OSCILLATOR CONFIGURATION


**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 6. "Oscillator Configuration"** (DS61112) in the "PIC32MX Family Reference Manual", which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 "Memory Organization"** in this data sheet for device-specific register and bit information.

The PIC32MX5XX/6XX/7XX oscillator system has the following modules and features:

- A Total of Four External and Internal Oscillator Options as Clock Sources
- On-chip PLL with User-Selectable Input Divider, Multiplier, and Output Divider to Boost Operating Frequency on Select Internal and External Oscillator Sources
- On-chip User-Selectable Divisor Postscaler on Select Oscillator Sources
- Software-controllable Switching Between Various Clock Sources
- A Fail-Safe Clock Monitor (FSCM) that Detects Clock Failure and Permits Safe Application Recovery or Shutdown
- Dedicated On-chip PLL for USB Peripheral

**FIGURE 8-1: PIC32MX5XX/6XX/7XX FAMILY CLOCK DIAGRAM**

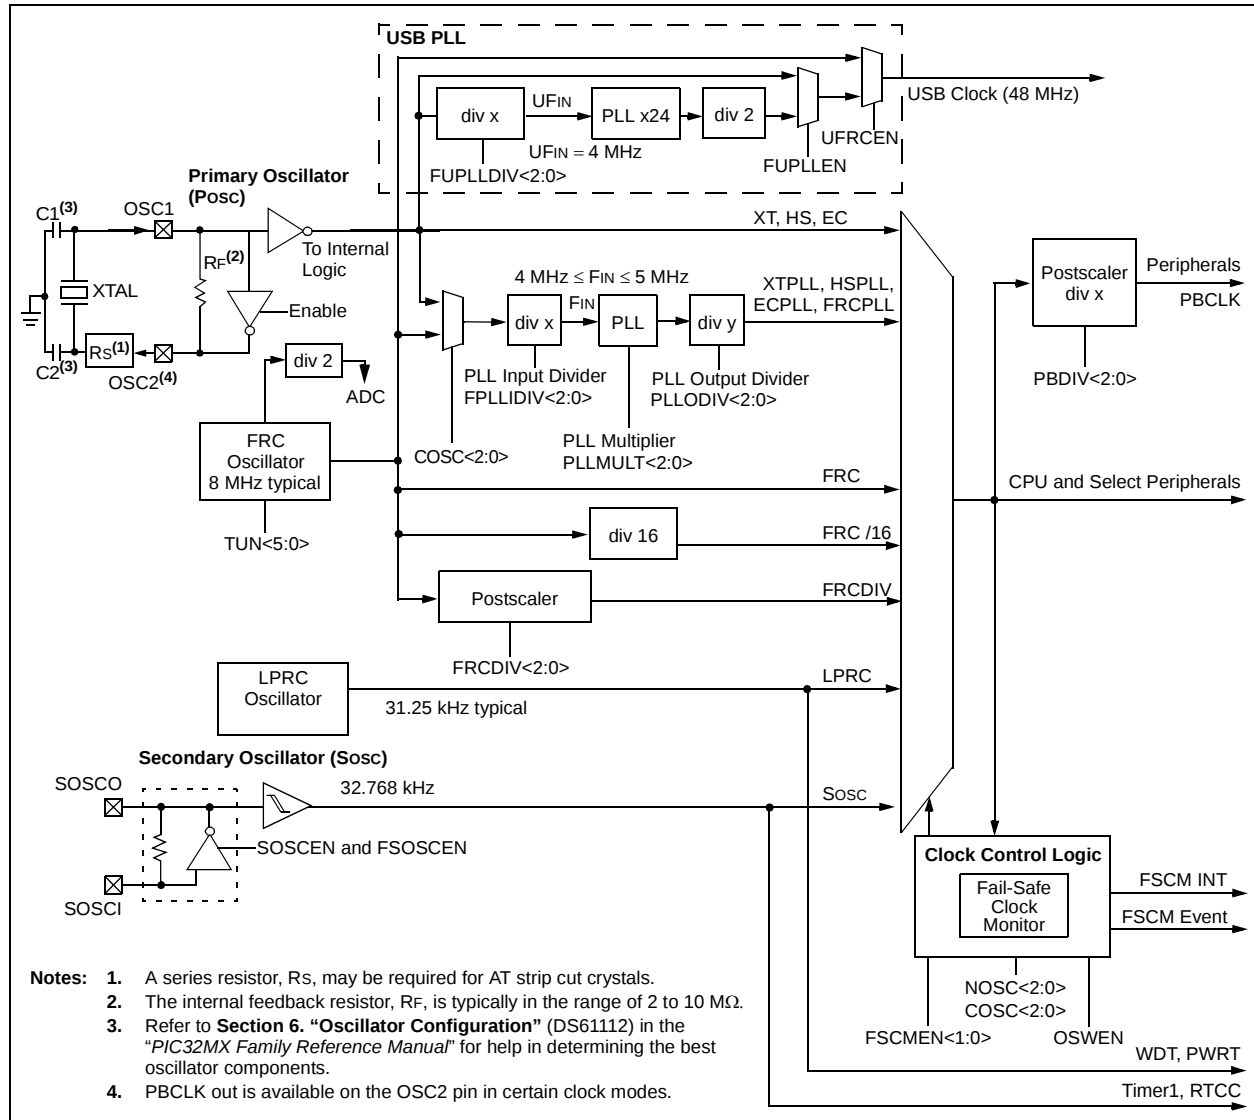

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 9.0 PREFETCH CACHE

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 4. “Prefetch Cache”** (DS61119) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).


**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

Prefetch cache increases performance for applications executing out of the cacheable program Flash memory regions by implementing instruction caching, constant data caching and instruction prefetching.

### 9.1 Features

- 16 Fully Associative Lockable Cache Lines
- 16-byte Cache Lines
- Up to four Cache Lines Allocated to Data
- Two Cache Lines with Address Mask to Hold Repeated Instructions
- Pseudo LRU Replacement Policy
- All Cache Lines are Software Writable
- 16-byte Parallel Memory Fetch
- Predictive Instruction Prefetch

**FIGURE 9-1: PREFETCH MODULE BLOCK DIAGRAM**

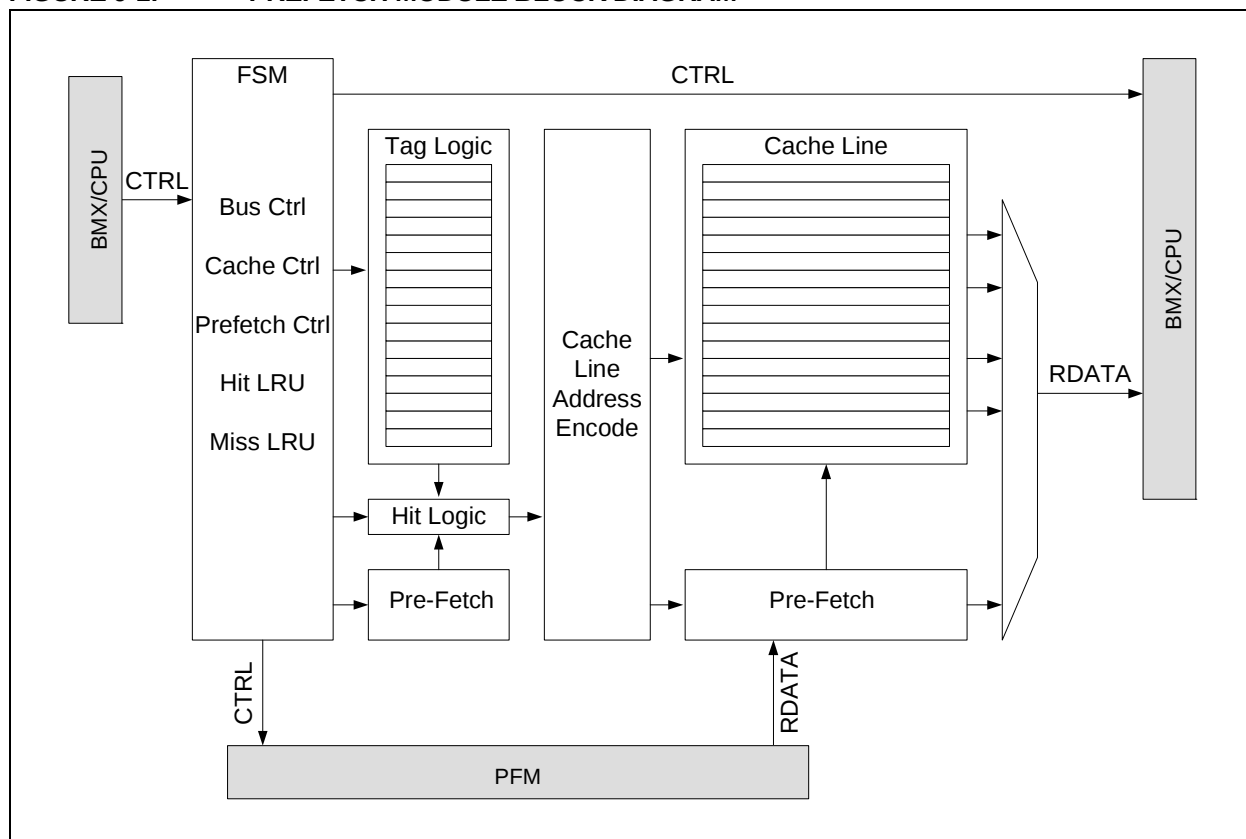

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 10.0 DIRECT MEMORY ACCESS (DMA) CONTROLLER

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 31. “Direct Memory Access (DMA) Controller”** (DS61117) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.


The PIC32MX Direct Memory Access (DMA) controller is a bus master module useful for data transfers between different devices without CPU intervention. The source and destination of a DMA transfer can be any of the memory mapped modules existent in the PIC32MX (such as Peripheral Bus (PBUS) devices: SPI, UART, I<sup>2</sup>C™, etc.) or memory itself.

Following are some of the key features of the DMA controller module:

- Four Identical Channels, each featuring:
  - Auto-Increment Source and Destination Address Registers
  - Source and Destination Pointers
  - Memory to Memory and Memory to Peripheral Transfers

- Automatic Word-Size Detection:
  - Transfer Granularity, down to byte level
  - Bytes need not be word-aligned at source and destination
- Fixed Priority Channel Arbitration
- Flexible DMA Channel Operating modes:
  - Manual (software) or automatic (interrupt) DMA requests
  - One-Shot or Auto-Repeat Block Transfer modes
  - Channel-to-channel chaining
- Flexible DMA Requests:
  - A DMA request can be selected from any of the peripheral interrupt sources
  - Each channel can select any (appropriate) observable interrupt as its DMA request source
  - A DMA transfer abort can be selected from any of the peripheral interrupt sources
  - Pattern (data) match transfer termination
- Multiple DMA Channel Status Interrupts:
  - DMA channel block transfer complete
  - Source empty or half empty
  - Destination full or half-full
  - DMA transfer aborted due to an external event
  - Invalid DMA address generated
- DMA Debug Support Features:
  - Most recent address accessed by a DMA channel
  - Most recent DMA channel to transfer data
- CRC Generation Module:
  - CRC module can be assigned to any of the available channels
  - CRC module is highly configurable

**FIGURE 10-1: DMA BLOCK DIAGRAM**

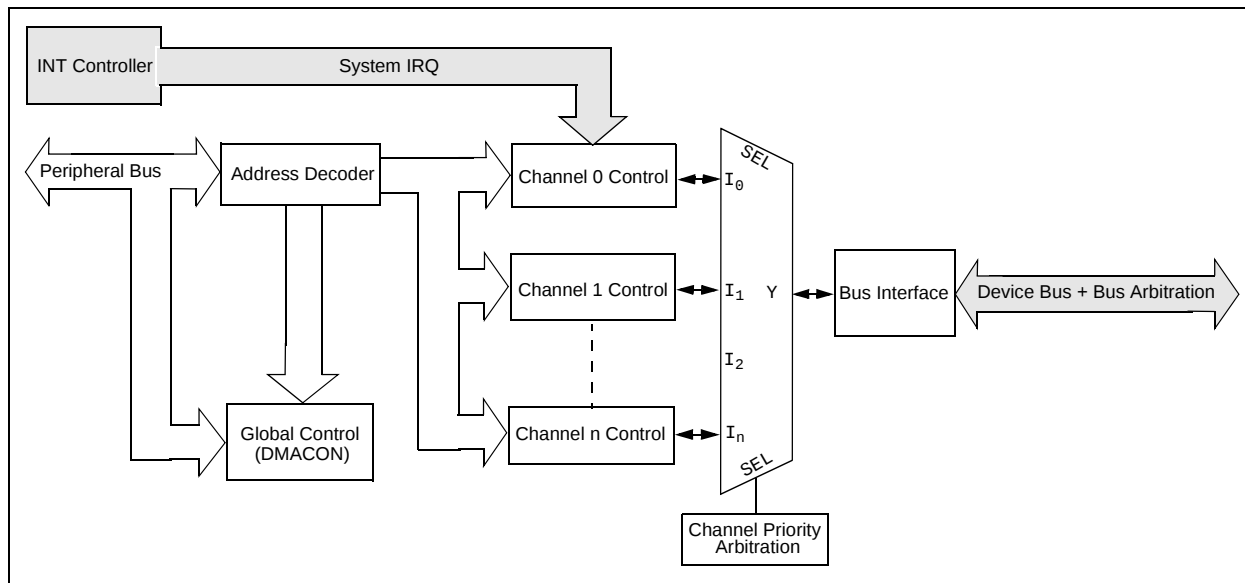

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 11.0 USB ON-THE-GO (OTG)

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 27. “USB On-The-Go (OTG)”** (DS61126) in the *“PIC32MX Family Reference Manual”*, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

The Universal Serial Bus (USB) module contains analog and digital components to provide a USB 2.0 full-speed and low-speed embedded host, full-speed device, or OTG implementation with a minimum of external components. This module in Host mode is intended for use as an embedded host and therefore does not implement a UHCI or OHCI controller.

The USB module consists of the clock generator, the USB voltage comparators, the transceiver, the Serial Interface Engine (SIE), a dedicated USB DMA controller, pull-up and pull-down resistors, and the register interface. A block diagram of the PIC32MX USB OTG module is presented in Figure 11-1.

The clock generator provides the 48 MHz clock required for USB full-speed and low-speed communication. The voltage comparators monitor the voltage on the VBUS pin to determine the state of the bus. The transceiver provides the analog translation between the USB bus and the digital logic. The SIE is a state machine that transfers data to and from the endpoint buffers, and generates the hardware protocol for data transfers. The USB DMA controller transfers data between the data buffers in RAM and the SIE. The integrated pull-up and pull-down resistors eliminate the need for external signaling components. The register interface allows the CPU to configure and communicate with the module.


The PIC32MX USB module includes the following features:

- USB Full-Speed Support for Host and Device
- Low-Speed Host Support
- USB OTG Support
- Integrated Signaling Resistors
- Integrated Analog Comparators for VBUS Monitoring
- Integrated USB Transceiver
- Transaction Handshaking Performed by Hardware
- Endpoint Buffering Anywhere in System RAM
- Integrated DMA to Access System RAM and Flash

**Note:** **IMPORTANT!** The implementation and use of the USB specifications, as well as other third-party specifications or technologies, may require licensing; including, but not limited to, USB Implementers Forum, Inc. (also referred to as USB-IF). The user is fully responsible for investigating and satisfying any applicable licensing obligations.

\_\_\_\_\_

\_\_\_\_\_

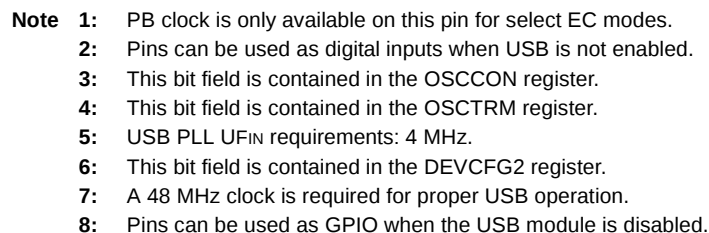

## 12.0 I/O PORTS

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 12. “I/O Ports”** (DS61120) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.


General purpose I/O pins are the simplest of peripherals. They allow the PIC® MCU to monitor and control other devices. To add flexibility and functionality, some pins are multiplexed with alternate function(s). These functions depend on which peripheral features are on the device. In general, when a peripheral is functioning, that pin may not be used as a general purpose I/O pin.

Following are some of the key features of this module:

- Individual Output Pin Open-drain Enable/Disable
- Individual Input Pin Weak Pull-up Enable/Disable
- Monitor Selective Inputs and Generate Interrupt when Change in Pin State is Detected
- Operation during CPU Sleep and Idle modes
- Fast Bit Manipulation using CLR, SET, and INV Registers

Figure 12-1 shows a block diagram of a typical multiplexed I/O port.

**FIGURE 12-1: BLOCK DIAGRAM OF A TYPICAL MULTIPLEXED PORT STRUCTURE**

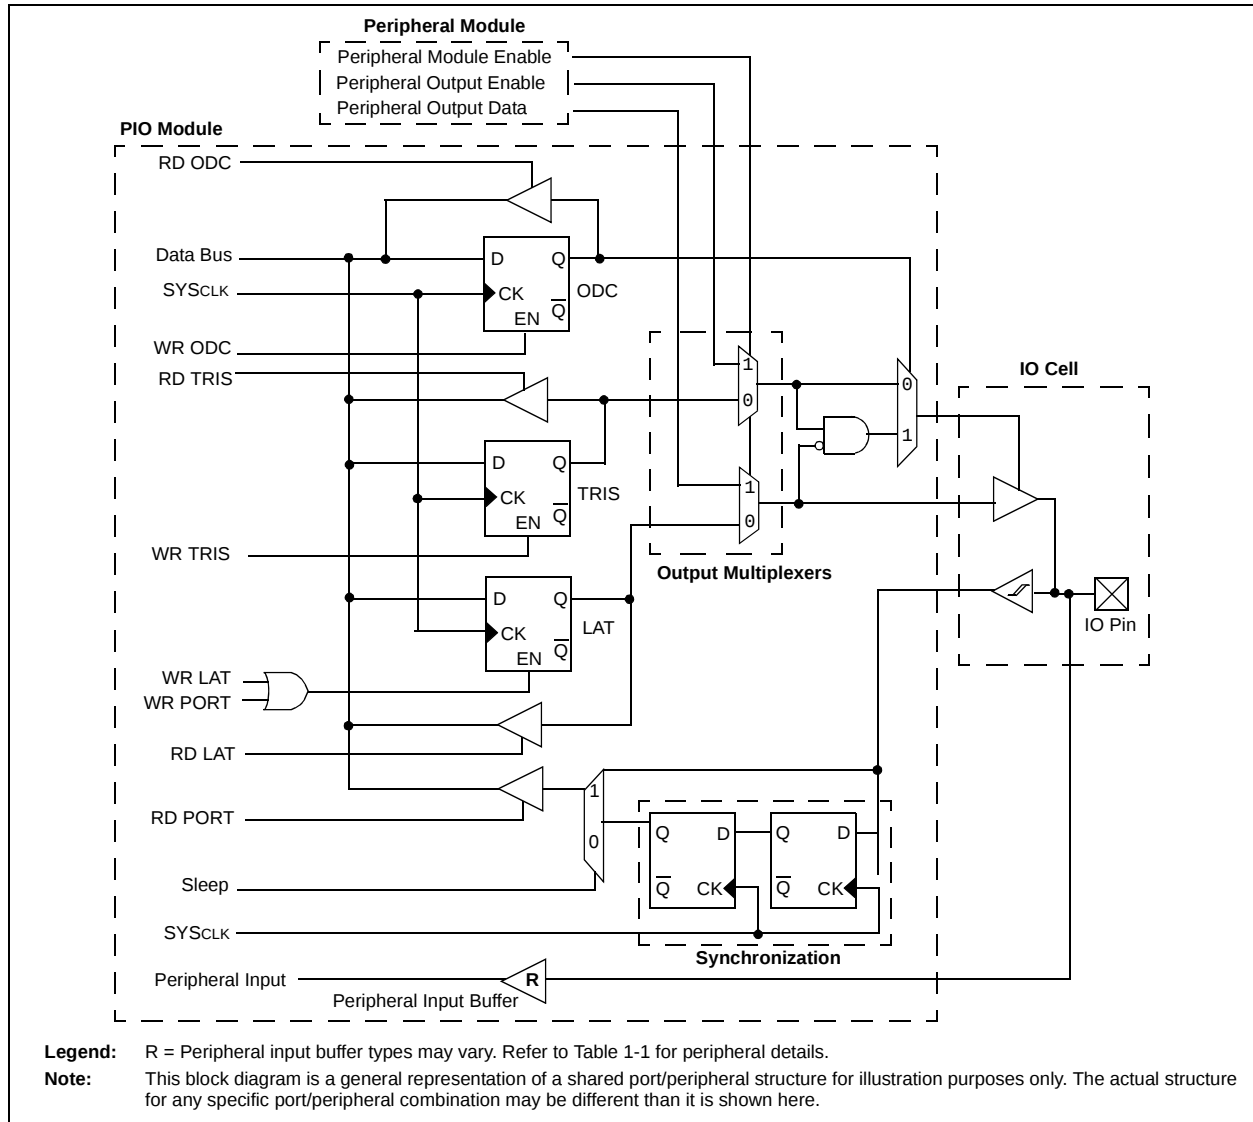

# PIC32MX5XX/6XX/7XX

## 12.1 Parallel I/O (PIO) Ports

All port pins have three registers (TRIS, LAT, and PORT) that are directly associated with their operation.

TRIS is a data direction or tri-state control register that determines whether a digital pin is an input or an output. Setting a TRISx register bit = 1 configures the corresponding I/O pin as an input; setting a TRISx register bit = 0 configures the corresponding I/O pin as an output. All port I/O pins are defined as inputs after a device Reset. Certain I/O pins are shared with analog peripherals and default to analog inputs after a device Reset.

PORT is a register used to read the current state of the signal applied to the port I/O pins. Writing to a PORTx register performs a write to the port's latch, LATx register, latching the data to the port's I/O pins.

LAT is a register used to write data to the port I/O pins. The LATx latch register holds the data written to either the LATx or PORTx registers. Reading the LATx latch register reads the last value written to the corresponding PORT or latch register.

Not all port I/O pins are implemented on some devices, therefore, the corresponding PORTx, LATx and TRISx register bits will read as zeros.

### 12.1.1 CLR, SET AND INV REGISTERS

Every I/O module register has a corresponding CLR (clear), SET (set) and INV (invert) register designed to provide fast atomic bit manipulations. As the name of the register implies, a value written to a SET, CLR or INV register effectively performs the implied operation, but only on the corresponding base register and only bits specified as '1' are modified. Bits specified as '0' are not modified.

Reading SET, CLR and INV registers returns undefined values. To see the affects of a write operation to a SET, CLR or INV register, the base register must be read.

To set PORTC bit 0, write to the LATSET register:

```
LATCSET = 0x0001;
```

To clear PORTC bit 0, write to the LATCLR register:

```
LATCCLR = 0x0001;
```

To toggle PORTC bit 0, write to the LATINV register:

```
LATCINV = 0x0001;
```

**Note:** Using a PORTxINV register to toggle a bit is recommended because the operation is performed in hardware atomically, using fewer instructions as compared to the traditional read-modify-write method shown below:

```
PORTC ^= 0x0001;
```

### 12.1.2 DIGITAL INPUTS

Pins are configured as digital inputs by setting the corresponding TRIS register bits = 1. When configured as inputs, they are either TTL buffers or Schmitt Triggers. Several digital pins share functionality with analog inputs and default to the analog inputs at POR. Setting the corresponding bit in the AD1PCFG register = 1 enables the pin as a digital pin.

The maximum input voltage allowed on the input pins is the same as the maximum  $V_{IH}$  specification. Refer to **Section 31.0 "Electrical Characteristics"** for  $V_{IH}$  specification details.

**Note:** Analog levels on any pin that is defined as a digital input (including the ANx pins) may cause the input buffer to consume current that exceeds the device specifications.

### 12.1.3 ANALOG INPUTS

Certain pins can be configured as analog inputs used by the ADC and comparator modules. Setting the corresponding bits in the AD1PCFG register = 0 enables the pin as an analog input pin and must have the corresponding TRIS bit set = 1 (input). If the TRIS bit is cleared = 0 (output), the digital output level ( $V_{OH}$  or  $V_{OL}$ ) will be converted. Any time a port I/O pin is configured as analog, its digital input is disabled and the corresponding PORTx register bit will read '0'. The AD1PCFG Register has a default value of 0x0000; therefore, all pins that share ANx functions are analog (not digital) by default.

### 12.1.4 DIGITAL OUTPUTS

Pins are configured as digital outputs by setting the corresponding TRIS register bits = 0. When configured as digital outputs, these pins are CMOS drivers or can be configured as open drain outputs by setting the corresponding bits in the ODCx Open-Drain Configuration register.

The open-drain feature allows generation of outputs higher than  $V_{DD}$  (e.g., 5V) on any desired 5V tolerant pins by using external pull-up resistors. The maximum open-drain voltage allowed is the same as the maximum  $V_{IH}$  specification.

See the **"Pin Diagrams"** section for the available pins and their functionality.

### 12.1.5 ANALOG OUTPUTS

Certain pins can be configured as analog outputs, such as the  $CV_{REF}$  output voltage used by the comparator module. Configuring the comparator reference module to provide this output will present the analog output voltage on the pin, independent of the TRIS register setting for the corresponding pin.

## 13.0 TIMER1

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 14. "Timers"** (DS61105) in the "PIC32MX Family Reference Manual", which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **4.0 "Memory Organization"** in this data sheet for device-specific register and bit information.


This family of PIC32MX devices features one synchronous/asynchronous 16-bit timer that can operate as a free-running interval timer for various timing applications and counting external events. This timer can also be used with the Low-Power Secondary Oscillator (Sosc) for real-time clock applications. The following modes are supported:

- Synchronous Internal Timer
- Synchronous Internal Gated Timer
- Synchronous External Timer
- Asynchronous External Timer

### 13.1 Additional Supported Features

- Selectable Clock Prescaler
- Timer Operation during CPU Idle and Sleep mode
- Fast Bit Manipulation using CLR, SET and INV Registers
- Asynchronous mode can be used with the Sosc to function as a Real-Time Clock (RTC).

**FIGURE 13-1: TIMER1 BLOCK DIAGRAM<sup>(1)</sup>**

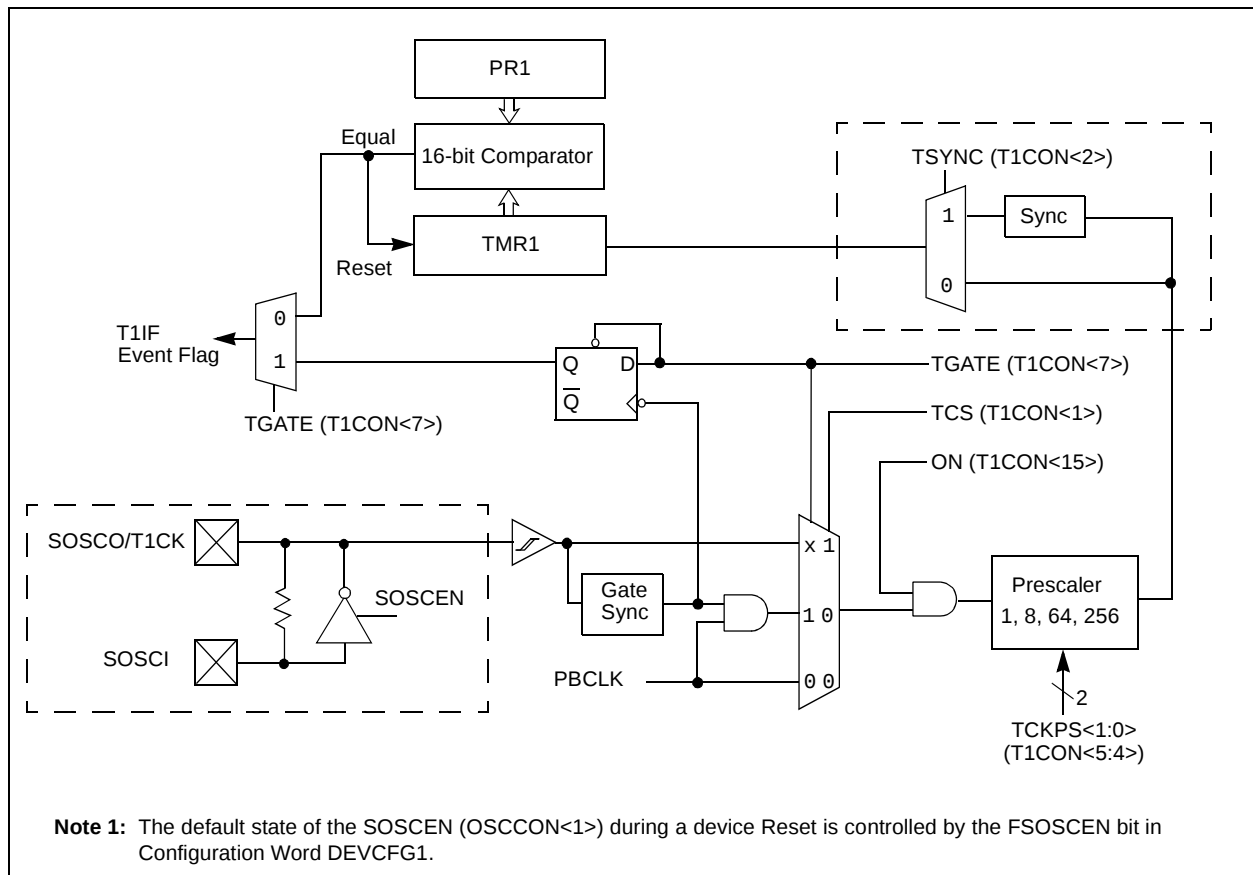

# PIC32MX5XX/6XX/7XX


---

NOTES:



\_\_\_\_\_

\_\_\_\_\_

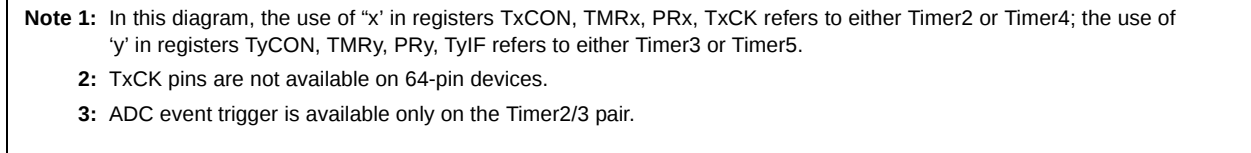

**3:** ADC event trigger is available only on the Timer2/3 pair.

## 15.0 INPUT CAPTURE

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 15. “Input Capture”** (DS61122) of the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

The input capture module is useful in applications requiring frequency (period) and pulse measurement.

The input capture module captures the 16-bit or 32-bit value of the selected Time Base registers when an event occurs at the ICx pin. The following events cause capture events:

1. Simple Capture Event modes
  - Capture timer value on every falling edge of input at ICx pin
  - Capture timer value on every rising edge of input at ICx pin


2. Capture timer value on every edge (rising and falling)
3. Capture timer value on every edge (rising and falling), specified edge first.
4. Prescaler Capture Event modes
  - Capture timer value on every 4th rising edge of input at ICx pin
  - Capture timer value on every 16th rising edge of input at ICx pin

Each input capture channel can select between one of two 16-bit timers (Timer2 or Timer3) for the time base, or two 16-bit timers (Timer2 and Timer3) together to form a 32-bit timer. The selected timer can use either an internal or external clock.

Other operational features include:

- Device Wake-up from Capture Pin during CPU Sleep and Idle modes
- Interrupt on Input Capture Event
- 4-word FIFO Buffer for Capture Values  
Interrupt optionally generated after 1, 2, 3 or 4 buffer locations are filled
- Input Capture can also be used to provide additional sources of External Interrupts

**FIGURE 15-1: INPUT CAPTURE BLOCK DIAGRAM**

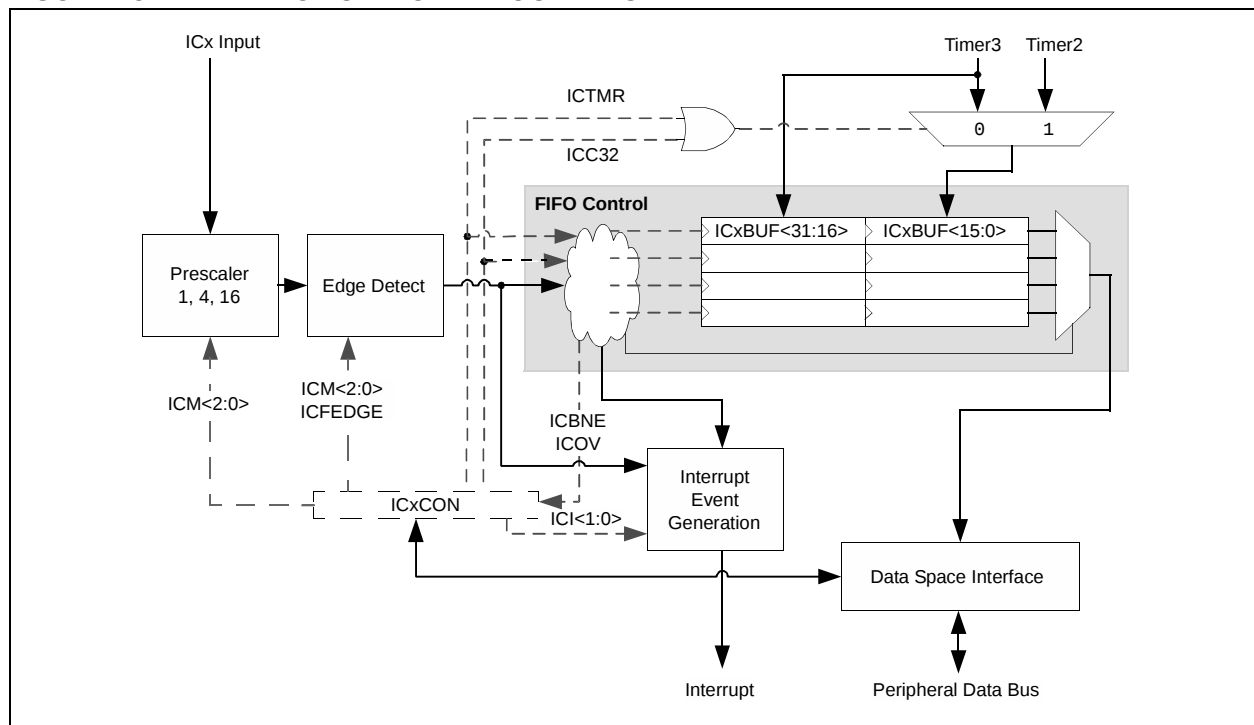

# PIC32MX5XX/6XX/7XX

---

NOTES:



# PIC32MX5XX/6XX/7XX

---

NOTES:

## 17.0 SERIAL PERIPHERAL INTERFACE (SPI)

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 23. “Serial Peripheral Interface (SPI)”** (DS61106) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).


**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

The SPI module is a synchronous serial interface that is useful for communicating with external peripherals and other microcontroller devices. These peripheral devices may be Serial EEPROMs, shift registers, display drivers, A/D converters, etc. The PIC32MX SPI module is compatible with Motorola® SPI and SIOP interfaces.

Following are some of the key features of this module:

- Master and Slave modes Support
- Four Different Clock Formats
- Enhanced Framed SPI Protocol Support
- User Configurable 8-bit, 16-bit and 32-bit Data Width
- Separate SPI FIFO Buffers for Receive and Transmit
  - FIFO buffers act as 4/8/16-level deep FIFOs based on 32/16/8-bit data width
- Programmable Interrupt Event on Every 8-bit, 16-bit, and 32-bit Data Transfer
- Operation during CPU Sleep and Idle mode
- Fast Bit Manipulation using CLR, SET, and INV Registers

**FIGURE 17-1: SPI MODULE BLOCK DIAGRAM**

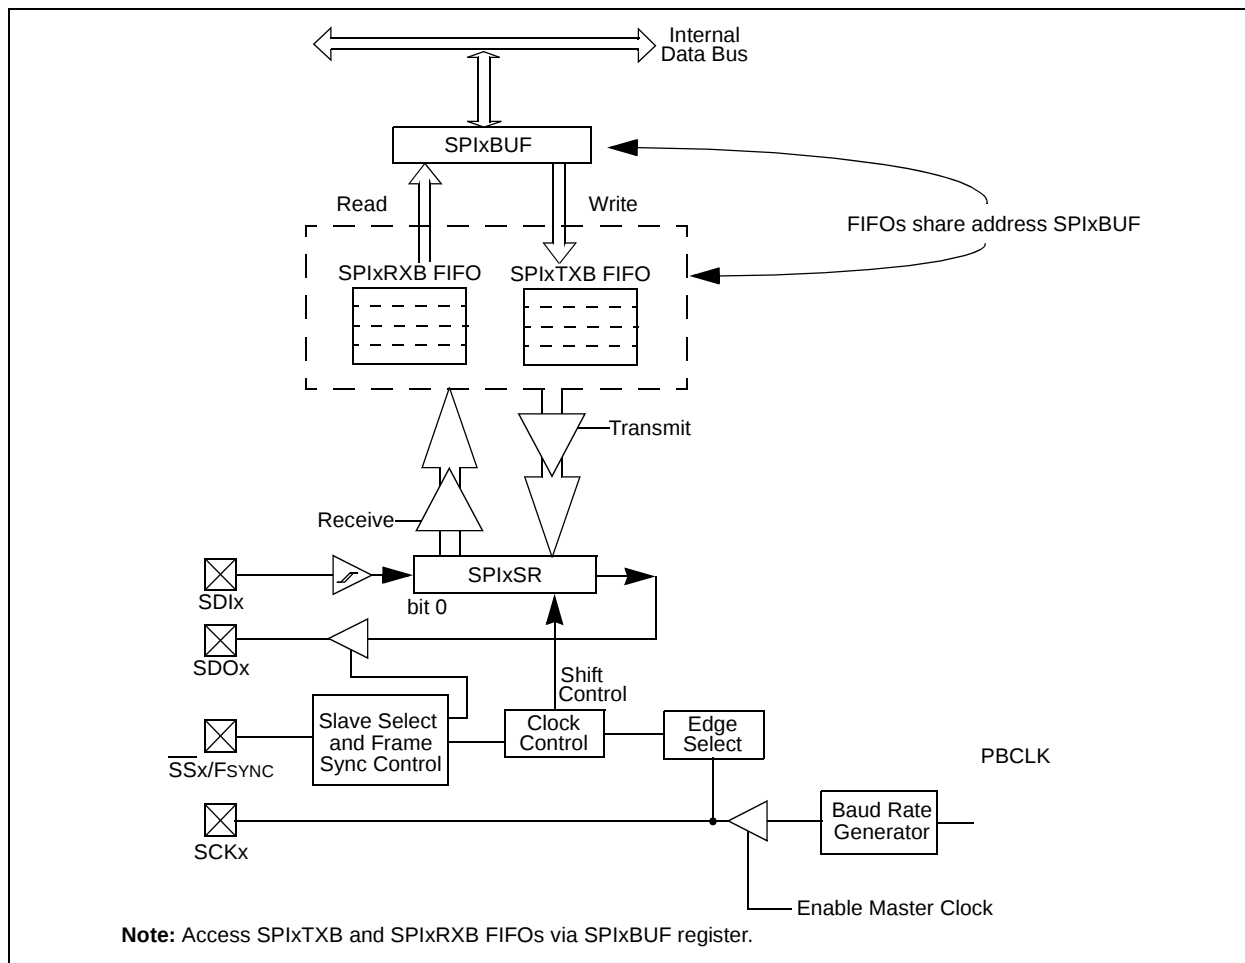

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 18.0 INTER-INTEGRATED CIRCUIT (I<sup>2</sup>C™)

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 24. “Inter-Integrated Circuit”** (DS61116) in the *“PIC32MX Family Reference Manual”*, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

The I<sup>2</sup>C module provides complete hardware support for both Slave and Multi-Master modes of the I<sup>2</sup>C serial communication standard. Figure 18-1 shows the I<sup>2</sup>C module block diagram.


Each I<sup>2</sup>C module has a 2-pin interface: the SCLx pin is clock and the SDAx pin is data.

Each I<sup>2</sup>C module offers the following key features:

- I<sup>2</sup>C Interface Supporting both Master and Slave Operation
- I<sup>2</sup>C Slave mode Supports 7 and 10-bit Address
- I<sup>2</sup>C Master mode Supports 7 and 10-bit Address
- I<sup>2</sup>C Port allows Bidirectional Transfers between Master and Slaves
- Serial Clock Synchronization for I<sup>2</sup>C Port can be used as a Handshake Mechanism to Suspend and Resume Serial Transfer (SCLREL control)
- I<sup>2</sup>C Supports Multi-master Operation; Detects Bus Collision and Arbitrates Accordingly
- Provides Support for Address Bit Masking

# PIC32MX5XX/6XX/7XX

FIGURE 18-1: I<sup>2</sup>C™ BLOCK DIAGRAM (x = 1 OR 2)

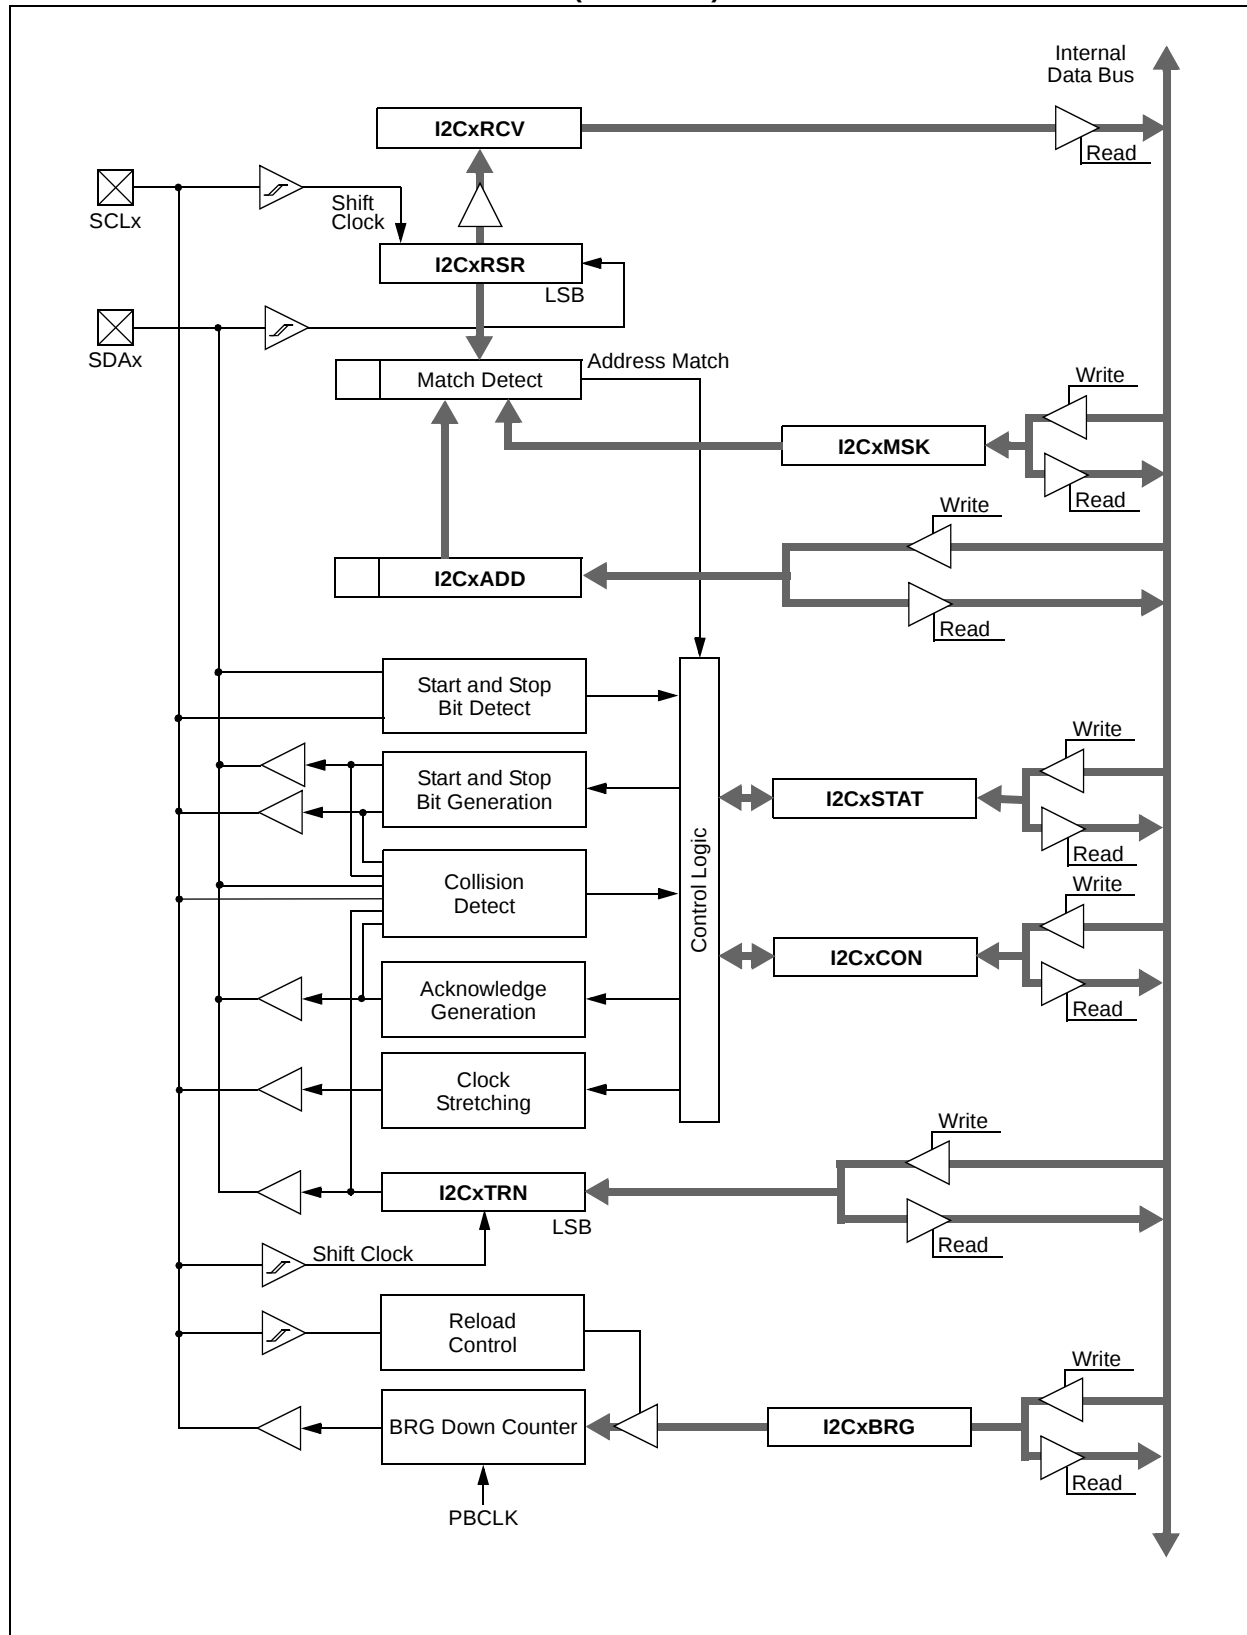

## 19.0 UNIVERSAL ASYNCHRONOUS RECEIVER TRANSMITTER (UART)

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 21. “Universal Asynchronous Receiver Transmitter (UART)”** (DS61107) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**Note 2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.


The UART module is one of the serial I/O modules available in PIC32MX5XX/6XX/7XX family devices. The UART is a full-duplex, asynchronous communication channel that communicates with peripheral devices and personal computers through protocols such as RS-232, RS-485, LIN 1.2 and IrDA®. The module also supports the hardware flow control option, with UxCTS and UxRTS pins, and also includes an IrDA encoder and decoder.

The primary features of the UART module are:

- Full-duplex, 8-bit or 9-bit Data Transmission
- Even, Odd or No Parity Options (for 8-bit data)
- One or Two Stop Bits
- Hardware Auto-baud Feature
- Hardware Flow Control Option
- Fully Integrated Baud Rate Generator (BRG) with 16-bit Prescaler
- Baud Rates Ranging from 76 bps to 20 Mbps at 80 MHz
- 8-level-deep First-In-First-Out (FIFO) Transmit Data Buffer
- 8-level-deep FIFO Receive Data Buffer
- Parity, Framing and Buffer Overrun Error Detection
- Support for Interrupt Only on Address Detect (9th bit = 1)
- Separate Transmit and Receive Interrupts
- Loopback mode for Diagnostic Support
- LIN 1.2 Protocol Support
- IrDA Encoder and Decoder with 16x Baud Clock Output for External IrDA Encoder/Decoder Support

Figure 19-1 shows a simplified block diagram of the UART.


**FIGURE 19-1: UART SIMPLIFIED BLOCK DIAGRAM**

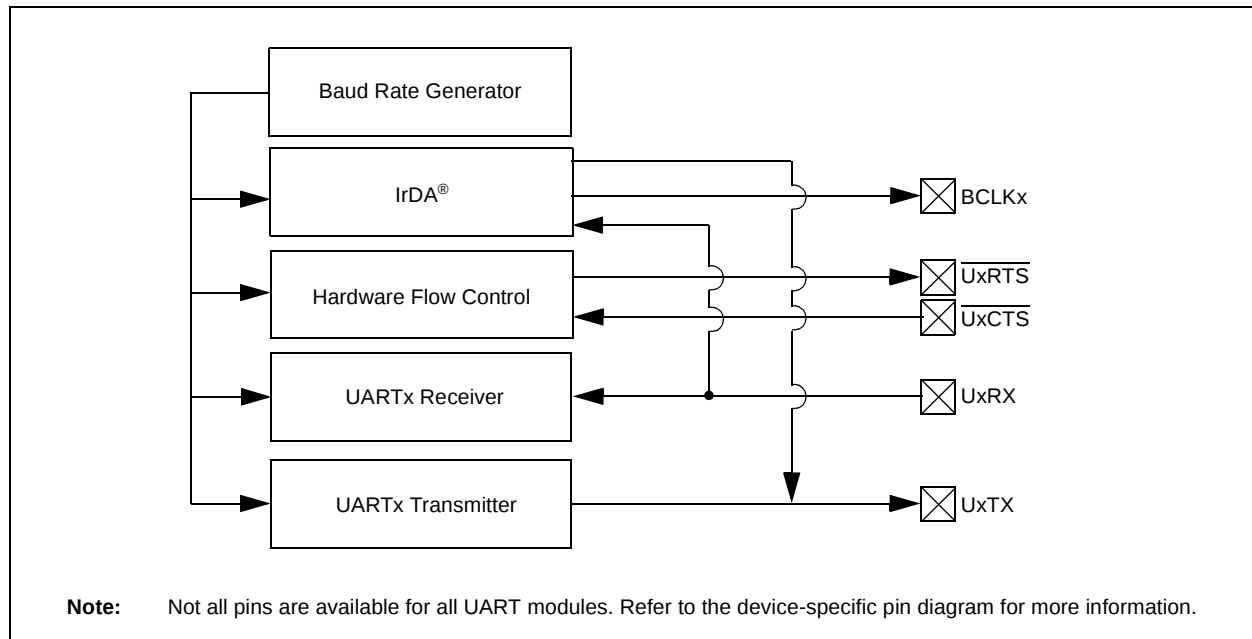


# PIC32MX5XX/6XX/7XX

Figure 19-2 and Figure 19-3 illustrate typical receive and transmit timing for the UART module.

**FIGURE 19-2: UART RECEPTION**

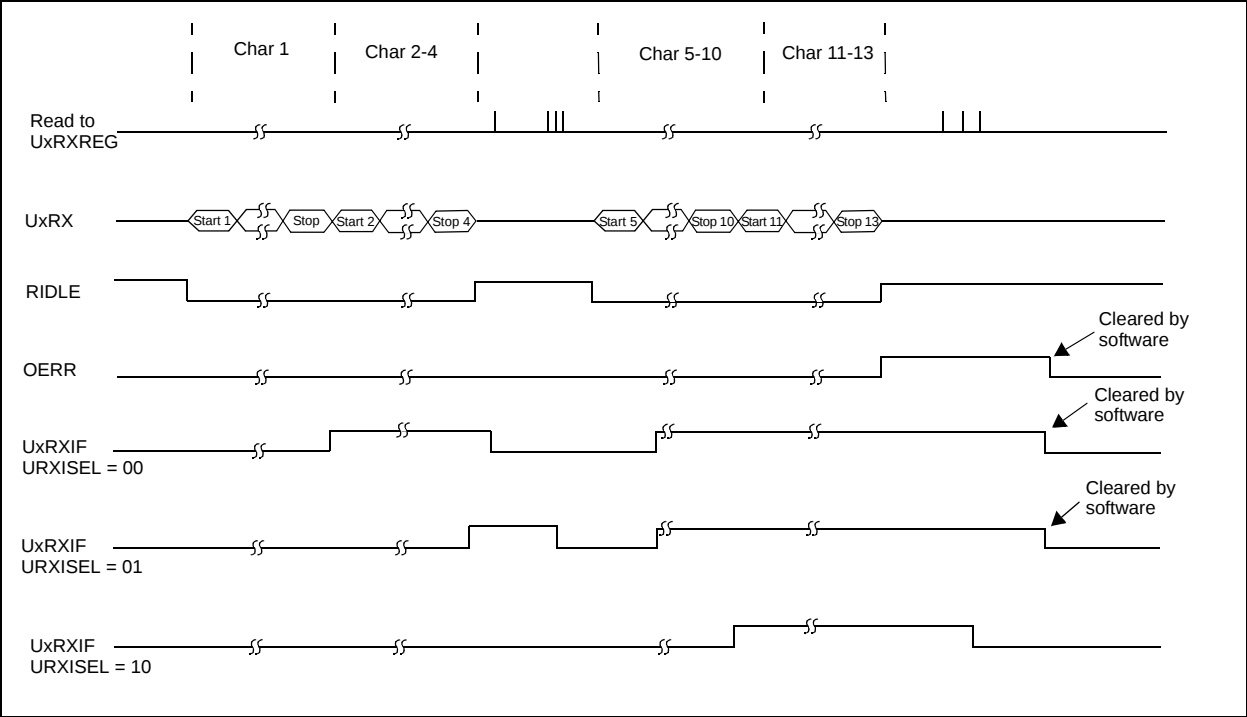

**FIGURE 19-3: TRANSMISSION (8-BIT OR 9-BIT DATA)**

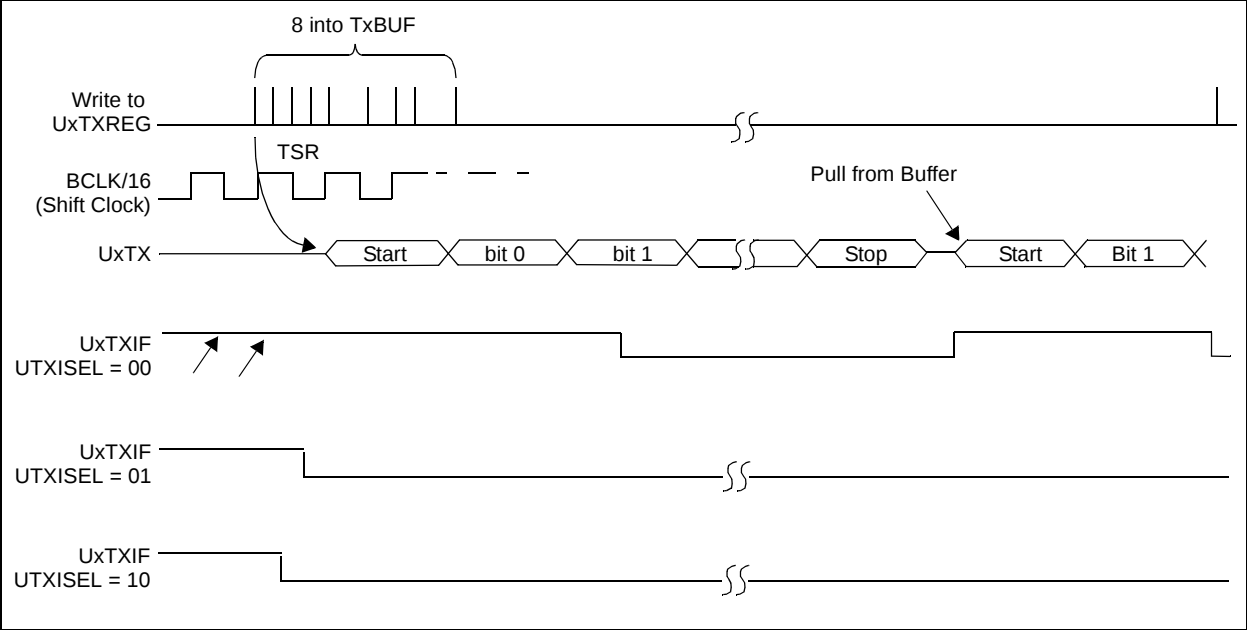

## 20.0 PARALLEL MASTER PORT (PMP)

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 13. "Parallel Master Port (PMP)"** (DS61128) in the *"PIC32MX Family Reference Manual"*, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 "Memory Organization"** in this data sheet for device-specific register and bit information.


The PMP is a parallel 8-bit/16-bit input/output module specifically designed to communicate with a wide variety of parallel devices, such as communications peripherals, LCDs, external memory devices, and microcontrollers. Because the interface to parallel peripherals varies significantly, the PMP module is highly configurable.

Key features of the PMP module include:

- 8-bit, 16-bit Interface
- Up to 16 Programmable Address Lines
- Up to Two Chip Select Lines
- Programmable Strobe Options
  - Individual read and write strobes, or
  - Read/write strobe with enable strobe
- Address Auto-increment/Auto-decrement
- Programmable Address/Data Multiplexing
- Programmable Polarity on Control Signals
- Parallel Slave Port Support
  - Legacy addressable
  - Address support
  - 4-byte deep auto-incrementing buffer
- Programmable Wait States
- Operate during CPU Sleep and Idle modes
- Fast Bit Manipulation using CLR, SET and INV Registers
- Freeze Option for In-Circuit Debugging

**Note:** On 64-pin devices, data pins PMD<15:8> are not available.

**FIGURE 20-1: PMP MODULE PINOUT AND CONNECTIONS TO EXTERNAL DEVICES**

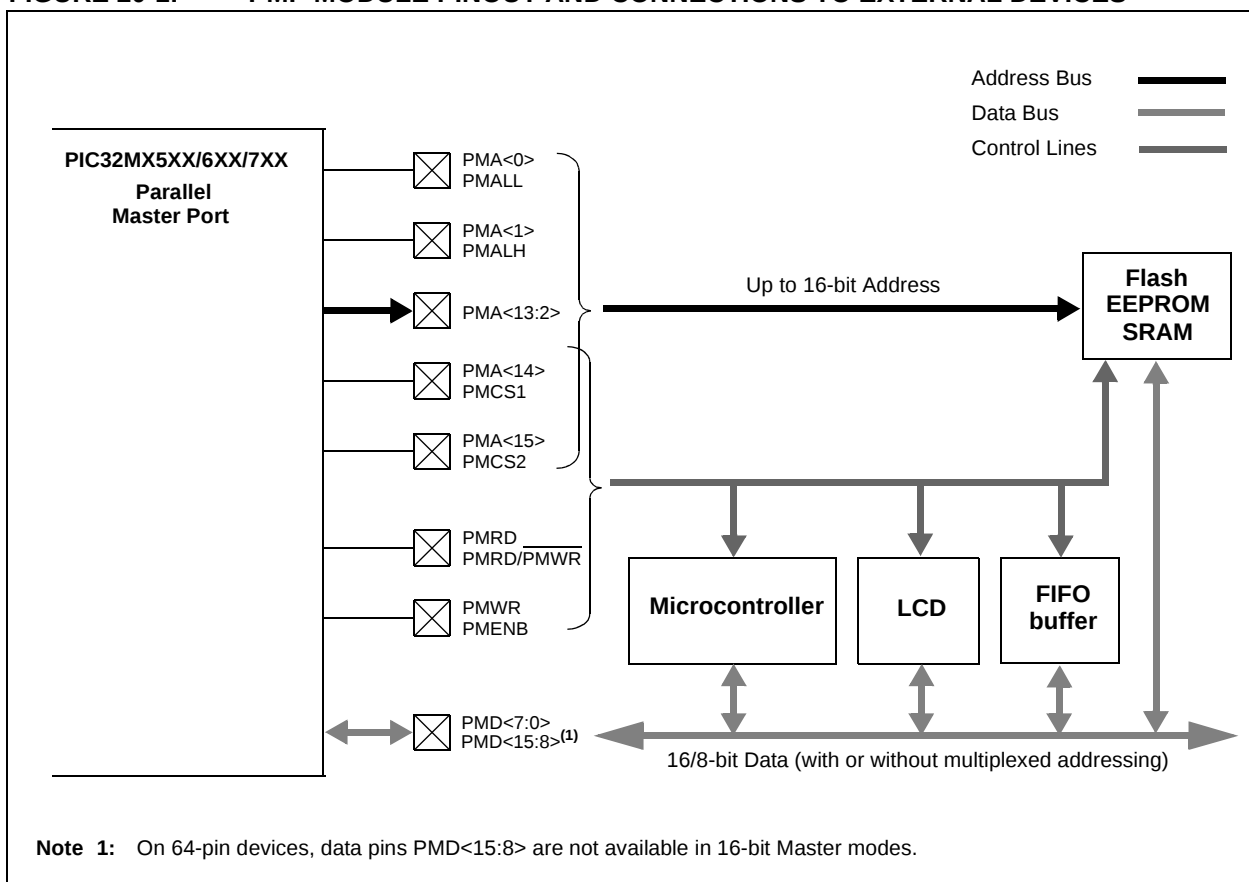

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 21.0 REAL-TIME CLOCK AND CALENDAR (RTCC)

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 29. “Real-Time Clock and Calendar (RTCC)”** (DS61125) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).


**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

The PIC32MX RTCC module is intended for applications in which accurate time must be maintained for extended periods of time with minimal or no CPU intervention. Low-power optimization provides extended battery lifetime while keeping track of time.

Following are some of the key features of this module:

- Time: Hours, Minutes and Seconds
- 24-Hour Format (Military Time)
- Visibility of One-Half-Second Period
- Provides Calendar: Weekday, Date, Month and Year
- Alarm Intervals are configurable for Half of a Second, One Second, 10 Seconds, One Minute, 10 Minutes, One Hour, One Day, One Week, One Month and One Year
- Alarm Repeat with Decrementing Counter
- Alarm with Indefinite Repeat: Chime
- Year Range: 2000 to 2099
- Leap Year Correction
- BCD Format for Smaller Firmware Overhead
- Optimized for Long-Term Battery Operation
- Fractional Second Synchronization
- User Calibration of the Clock Crystal Frequency with Auto-Adjust
- Calibration Range:  $\pm 0.66$  Seconds Error per Month
- Calibrates up to 260 ppm of Crystal Error
- Requirements: External 32.768 kHz Clock Crystal
- Alarm Pulse or Seconds Clock Output on RTCC pin

**FIGURE 21-1: RTCC BLOCK DIAGRAM**

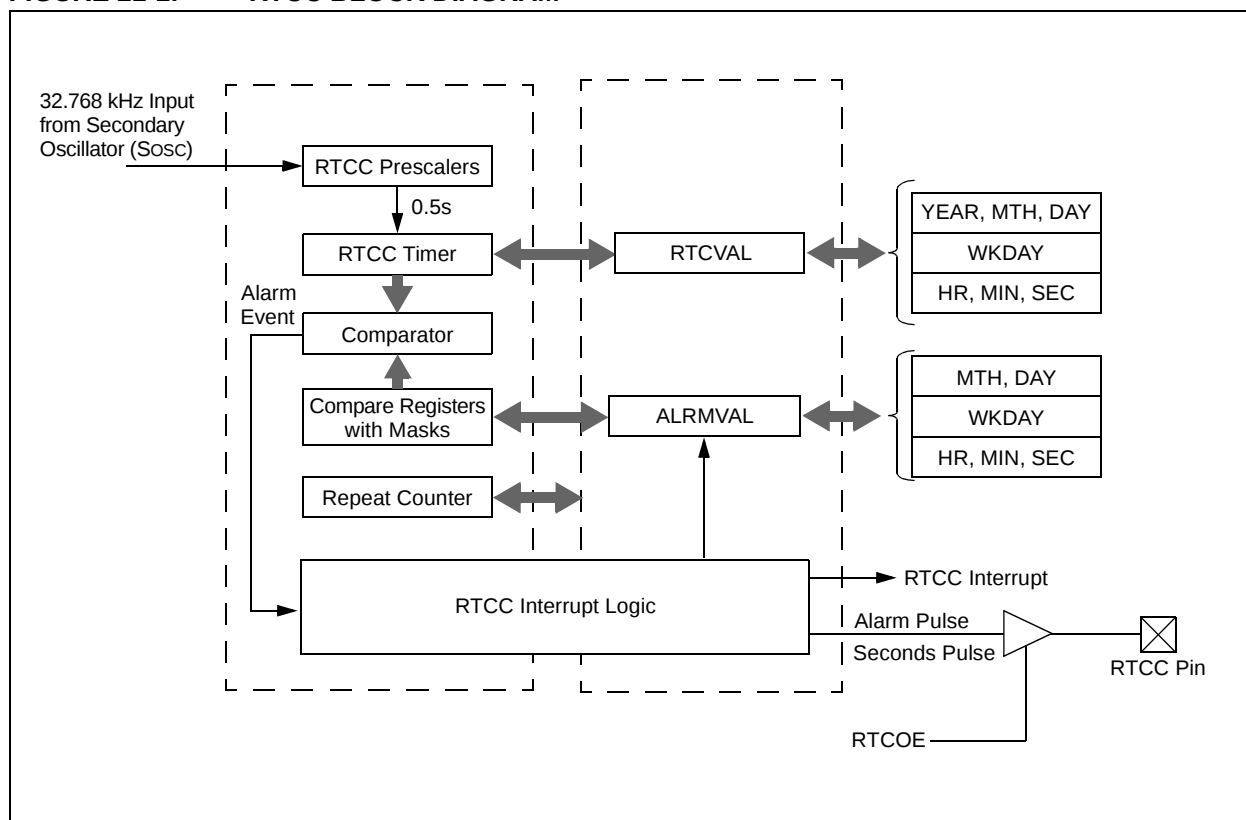

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 22.0 10-BIT ANALOG-TO-DIGITAL CONVERTER (ADC)

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 17. “10-bit Analog-to-Digital Converter (ADC)”** (DS61104) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

The PIC32MX5XX/6XX/7XX 10-bit Analog-to-Digital (A/D) converter (or ADC) includes the following features:

- Successive Approximation Register (SAR) Conversion
- Up to 1 Msps Conversion Speed
- Up to 16 Analog Input Pins
- External Voltage Reference Input Pins

- One Unipolar, Differential Sample-and-Hold Amplifier (SHA)
- Automatic Channel Scan mode
- Selectable Conversion Trigger Source
- 16-word Conversion Result Buffer
- Selectable Buffer Fill modes
- Eight Conversion Result Format Options
- Operation during CPU Sleep and Idle modes

A block diagram of the 10-bit ADC is shown in Figure 22-1. The 10-bit ADC has up to 16 analog input pins, designated AN0-AN15. In addition, there are two analog input pins for external voltage reference connections. These voltage reference inputs may be shared with other analog input pins and may be common to other analog module references.

The analog inputs are connected through two multiplexers (MUXs) to one SHA. The analog input MUXs can be switched between two sets of analog inputs between conversions. Unipolar differential conversions are possible on all channels, other than the pin used as the reference, using a reference input pin (see Figure 22-1).

The Analog Input Scan mode sequentially converts user-specified channels. A control register specifies which analog input channels will be included in the scanning sequence.

The 10-bit ADC is connected to a 16-word result buffer. Each 10-bit result is converted to one of eight 32-bit output formats when it is read from the result buffer.

**FIGURE 22-1: ADC1 MODULE BLOCK DIAGRAM**


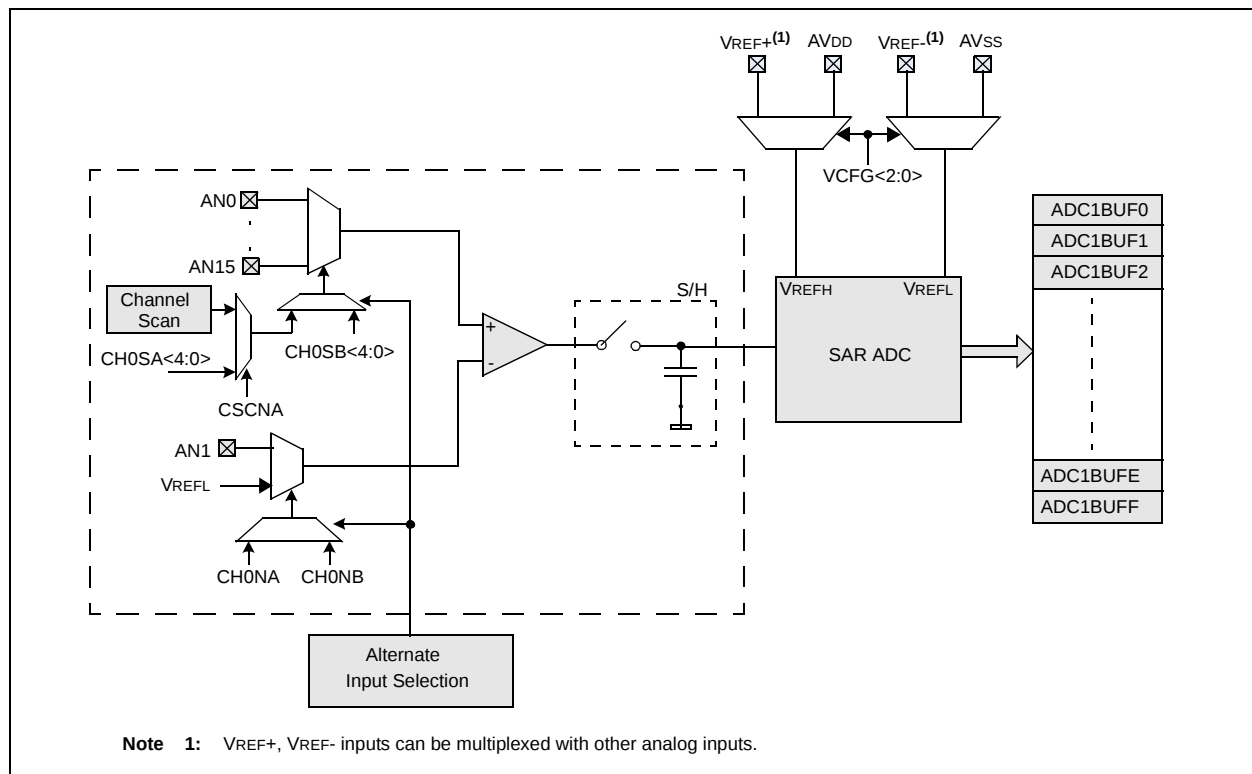


FIGURE 22-2: ADC CONVERSION CLOCK PERIOD BLOCK DIAGRAM

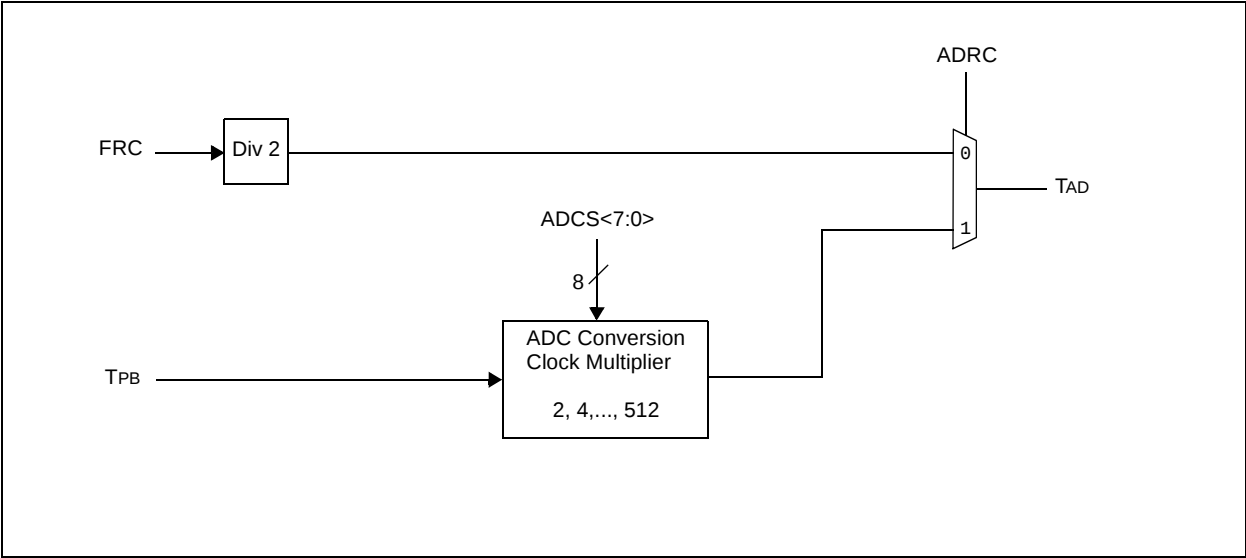

## 23.0 CONTROLLER AREA NETWORK (CAN)

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 34. “Controller Area Network (CAN)”** in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.


The Controller Area Network (CAN) module supports the following key features:

- Standards Compliance:
  - Full CAN 2.0B compliance
  - Programmable bit rate up to 1 Mbps
- Message Reception and Transmission:
  - 32 message FIFOs

- Each FIFO can have up to 32 messages for a total of 1024 messages
- FIFO can be a transmit message FIFO or a receive message FIFO
- User-defined priority levels for message FIFOs used for transmission
- 32 acceptance filters for message filtering
- Four acceptance filter mask registers for message filtering
- Automatic response to Remote Transmit Request
- DeviceNet™ addressing support
- Additional Features:
  - Loopback, Listen All Messages and Listen Only modes for self-test, system diagnostics, and bus monitoring
  - Low-power operating modes
  - CAN module is a bus master on the PIC32MX system bus
  - Use of DMA is not required
  - Dedicated time-stamp timer
  - Dedicated DMA channels
  - Data-only Message Reception mode

Figure 23-1 illustrates the general structure of the CAN module.

**FIGURE 23-1: PIC32MX CAN MODULE BLOCK DIAGRAM**

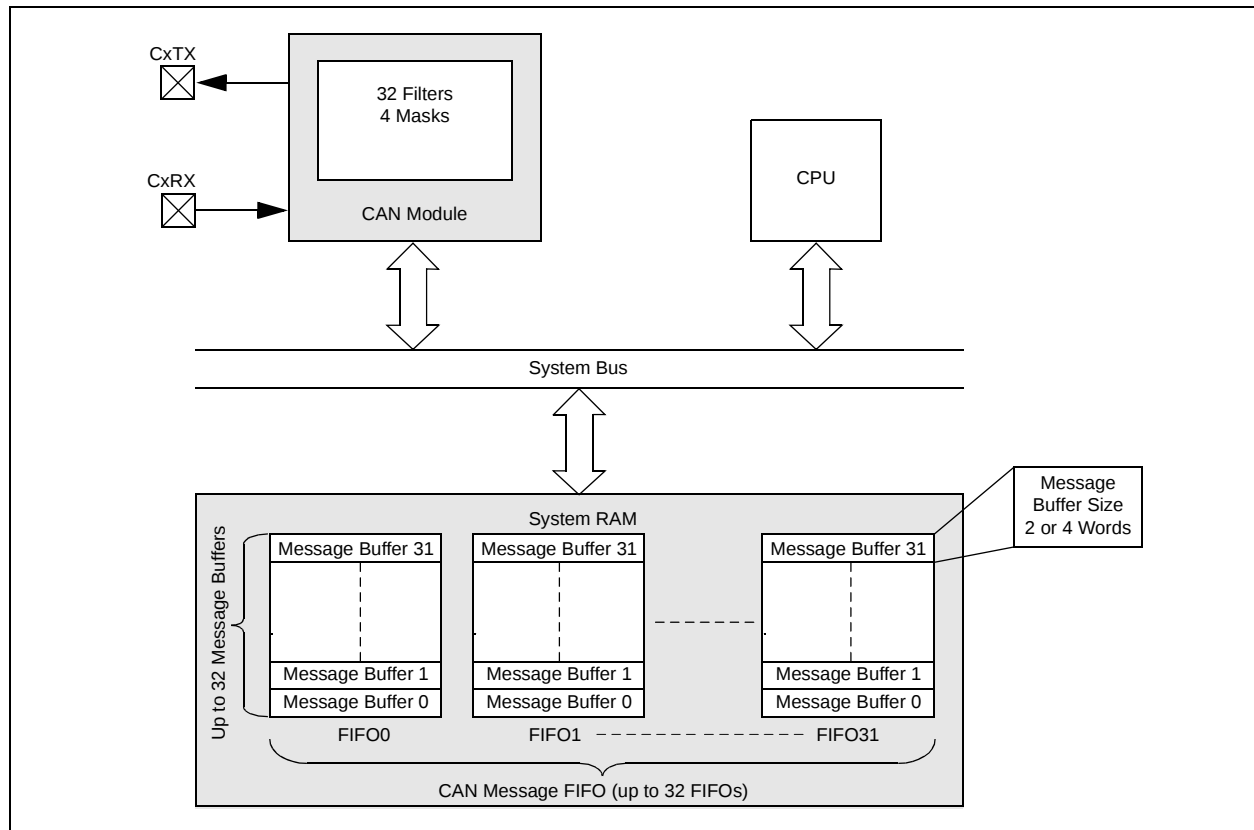

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 24.0 ETHERNET CONTROLLER

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 35. “Ethernet Controller”** in the *“PIC32MX Family Reference Manual”*, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.


The Ethernet Controller is a bus master module that interfaces with an off-chip Physical Layer (PHY) to implement a complete Ethernet node in a system.

Following are some of the key features of this module:

- Supports 10/100 Mbps Data Transfer Rates
- Supports Full-Duplex and Half-Duplex Operation
- Supports RMII and MII PHY Interface
- Supports MIIM PHY Management Interface
- Supports both Manual and Automatic Flow Control
- RAM Descriptor based DMA Operation for both Receive and Transmit Path
- Fully Configurable Interrupts
- Configurable Receive Packet Filtering
  - CRC Check
  - 64-byte Pattern Match
  - Broadcast, Multicast and Unicast packets
  - Magic Packet™
  - 64-bit Hash Table
  - Runt Packet
- Supports Packet Payload Checksum Calculation
- Supports Various Hardware Statistics Counters

Figure 24-1 shows a block diagram of the Ethernet Controller.

**FIGURE 24-1: ETHERNET CONTROLLER BLOCK DIAGRAM**

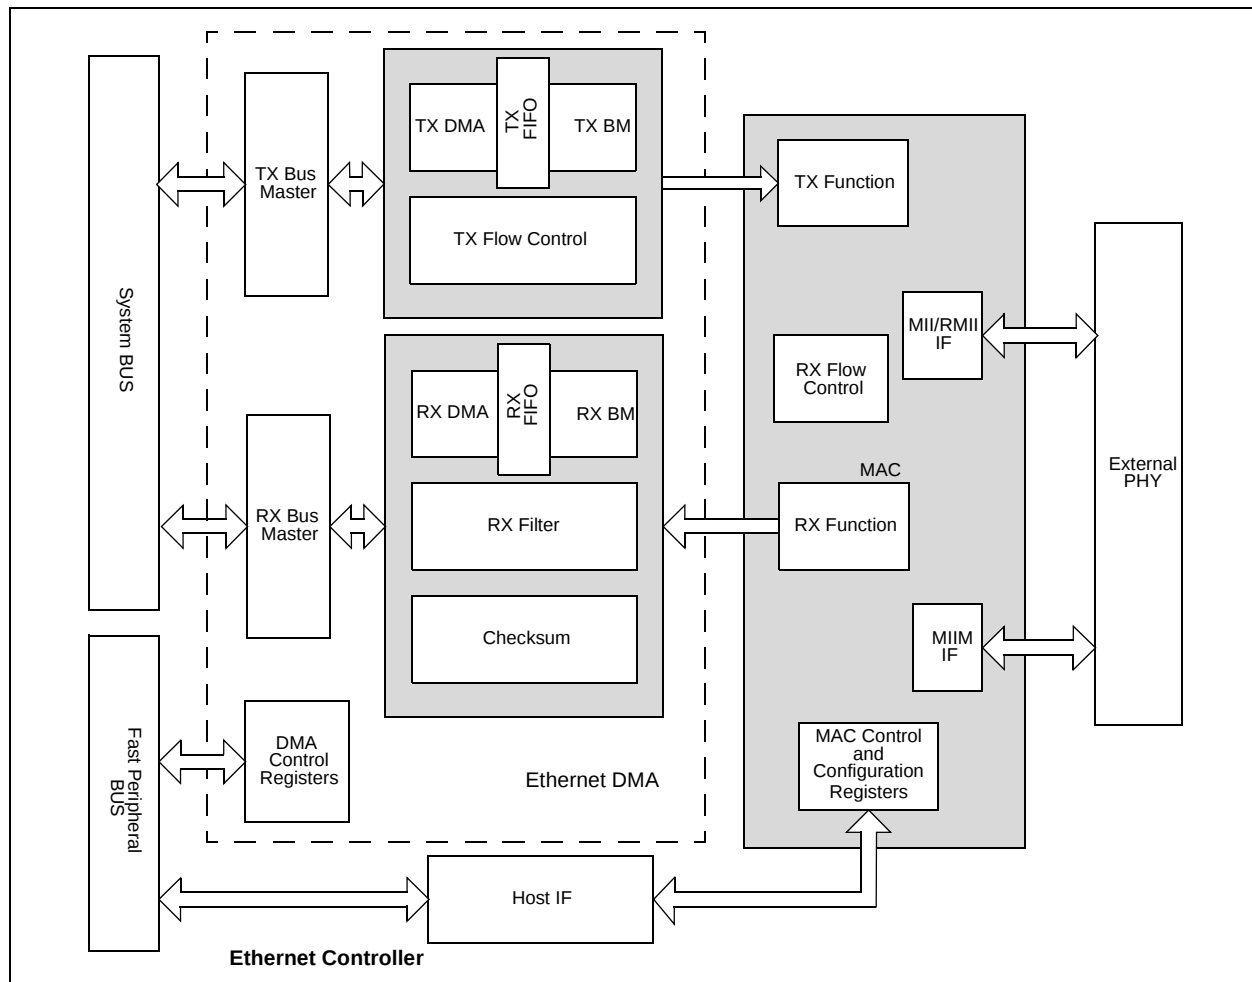

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 25.0 COMPARATOR

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 19. “Comparator”** (DS61110) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.


The PIC32MX5XX/6XX/7XX analog comparator module contains two comparators that can be configured in a variety of ways.

Following are some of the key features of this module:

- Selectable Inputs available include:
  - Analog inputs multiplexed with I/O pins
  - On-chip internal absolute voltage reference (IVREF)
  - Comparator voltage reference (CVREF)
- Outputs can be Inverted
- Selectable Interrupt Generation

A block diagram of the comparator module is shown in Figure 25-1.

**FIGURE 25-1: COMPARATOR BLOCK DIAGRAM**

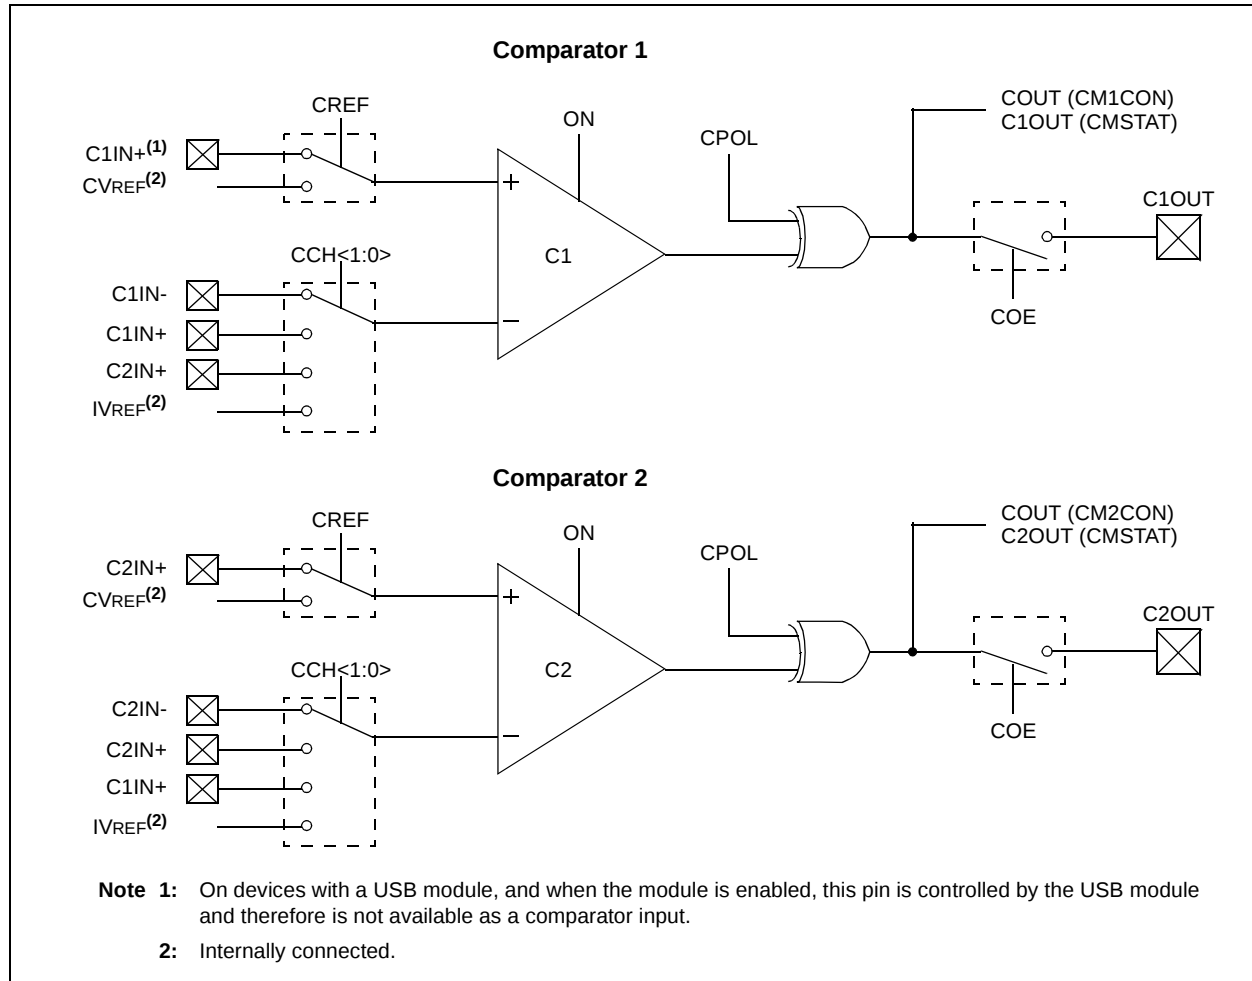

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 26.0 COMPARATOR VOLTAGE REFERENCE (CVREF)

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 20. “Comparator Voltage Reference (CVREF)”** (DS61109) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.


The CVREF module is a 16-tap, resistor ladder network that provides a selectable reference voltage. Although its primary purpose is to provide a reference for the analog comparators, it also may be used independently of them.

A block diagram of the module is shown in Figure 26-1. The resistor ladder is segmented to provide two ranges of voltage reference values and has a power-down function to conserve power when the reference is not being used. The module's supply reference can be provided from either device  $V_{DD}/V_{SS}$  or an external voltage reference. The CVREF output is available for the comparators and typically available for pin output.

The comparator voltage reference has the following features:

- High and low range selection
- Sixteen output levels available for each range
- Internally connected to comparators to conserve device pins
- Output can be connected to a pin

**FIGURE 26-1: COMPARATOR VOLTAGE REFERENCE BLOCK DIAGRAM**

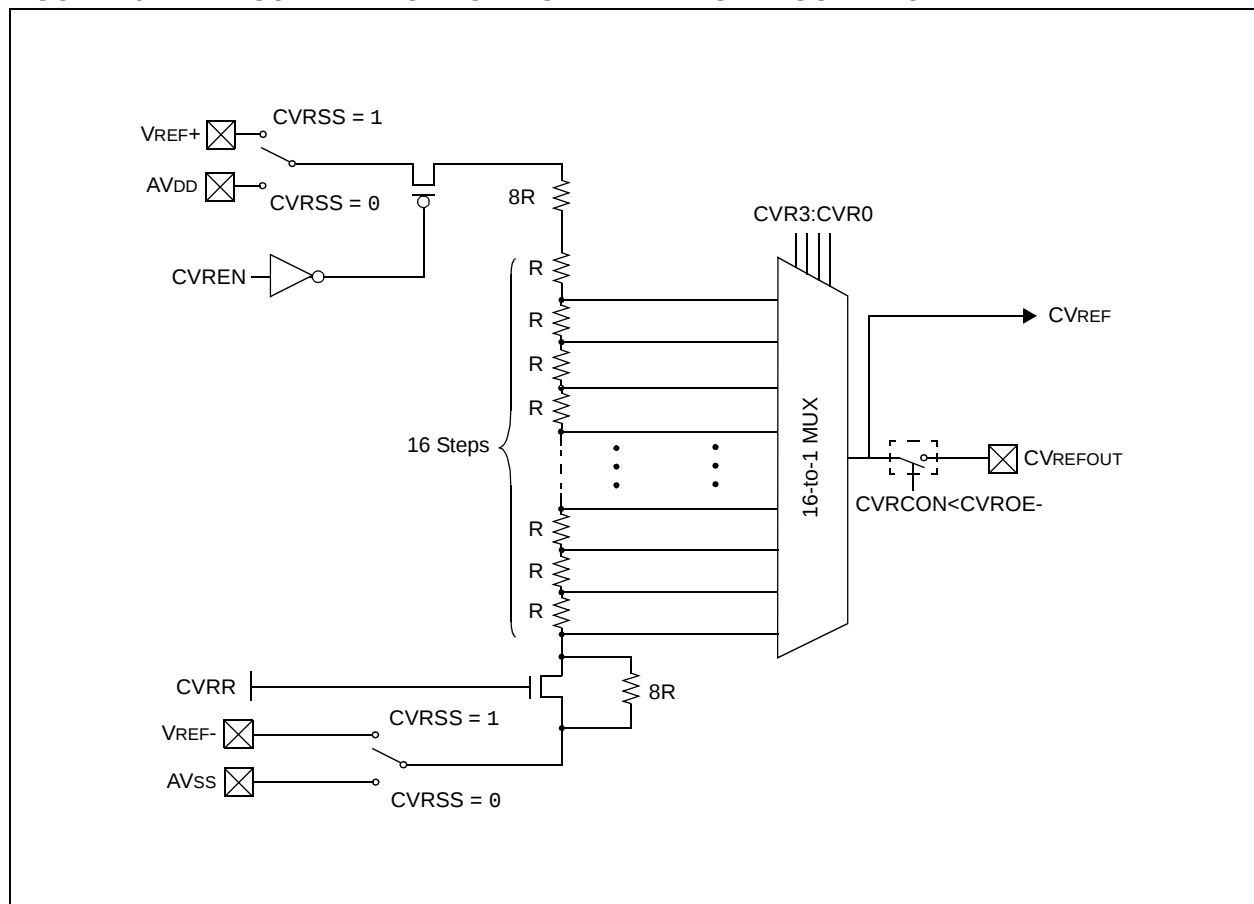

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 27.0 POWER-SAVING FEATURES

**Note 1:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 10. “Power-Saving Features”** (DS61130) in the “PIC32MX Family Reference Manual”, which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

This section describes power-saving features for the PIC32MX5XX/6XX/7XX. The PIC32MX devices offer a total of nine methods and modes, organized into two categories, that allow the user to balance power consumption with device performance. In all of the methods and modes described in this section, power saving is controlled by software.

### 27.1 Power Saving with CPU Running

When the CPU is running, power consumption can be controlled by reducing the CPU clock frequency, lowering the PBCLK, and by individually disabling modules. These methods are grouped into the following categories:

- FRC Run mode: the CPU is clocked from the FRC clock source with or without postscalars.
- LPRC Run mode: the CPU is clocked from the LPRC clock source.
- Sosc Run mode: the CPU is clocked from the Sosc clock source.

In addition, the Peripheral Bus Scaling mode is available where peripherals are clocked at programmable fraction of the CPU clock (SYSCLK).

### 27.2 CPU Halted Methods

The device supports two power-saving modes, Sleep and Idle, both of which halt the clock to the CPU. These modes operate with all clock sources, as listed below:

- Posc Idle mode: the system clock is derived from the Posc. The system clock source continues to operate.  
Peripherals continue to operate, but can optionally be individually disabled.
- FRC Idle mode: the system clock is derived from the FRC with or without postscalars.  
Peripherals continue to operate, but can optionally be individually disabled.

- Sosc Idle mode: the system clock is derived from the Sosc.  
Peripherals continue to operate, but can optionally be individually disabled.
- LPRC Idle mode: the system clock is derived from the LPRC.  
Peripherals continue to operate, but can optionally be individually disabled. This is the lowest power mode for the device with a clock running.
- Sleep mode: the CPU, the system clock source, and any peripherals that operate from the system clock source, are halted.  
Some peripherals can operate in Sleep using specific clock sources. This is the lowest power mode for the device.

### 27.3 Power-Saving Operation

Peripherals and the CPU can be halted or disabled to further reduce power consumption.

#### 27.3.1 SLEEP MODE

Sleep mode has the lowest power consumption of the device power-saving operating modes. The CPU and most peripherals are halted. Select peripherals can continue to operate in Sleep mode and can be used to wake the device from Sleep. See the individual peripheral module sections for descriptions of behavior in Sleep.

Sleep mode includes the following characteristics:

- The CPU is halted.
- The system clock source is typically shut down. See **Section 27.3.3 “Peripheral Bus Scaling Method”** for specific information.
- There can be a wake-up delay based on the oscillator selection.
- The Fail-Safe Clock Monitor (FSCM) does not operate during Sleep mode.
- The BOR circuit, if enabled, remains operative during Sleep mode.
- The WDT, if enabled, is not automatically cleared prior to entering Sleep mode.
- Some peripherals can continue to operate at limited functionality in Sleep mode. These peripherals include I/O pins that detect a change in the input signal, WDT, ADC, UART, and peripherals that use an external clock input or the internal LPRC oscillator (e.g., RTCC, Timer1, and Input Capture).
- I/O pins continue to sink or source current in the same manner as they do when the device is not in Sleep.
- The USB module can override the disabling of the Posc or FRC. Refer to the USB section for specific details.
- Modules can be individually disabled by software prior to entering Sleep in order to further reduce consumption.

# PIC32MX5XX/6XX/7XX

The processor will exit, or 'wake-up', from Sleep on one of the following events:

- On any interrupt from an enabled source that is operating in Sleep. The interrupt priority must be greater than the current CPU priority.
- On any form of device Reset
- On a WDT time-out

If the interrupt priority is lower than or equal to current priority, the CPU will remain halted, but the PBCLK will start running and the device will enter into Idle mode.

## 27.3.2 IDLE MODE

In the Idle mode, the CPU is halted but the System Clock (SYSCLK) source is still enabled. This allows peripherals to continue operation when the CPU is halted. Peripherals can be individually configured to halt when entering Idle by setting their respective SIDL bit. Latency when exiting Idle mode is very low due to the CPU oscillator source remaining active.

**Notes:** Changing the PBCLK divider ratio requires recalculation of peripheral timing. For example, assume the UART is configured for 9600 baud with a PB clock ratio of 1:1 and a Posc of 8 MHz. When the PB clock divisor of 1:2 is used, the input frequency to the baud clock is cut in half; therefore, the baud rate is reduced to 1/2 its former value. Due to numeric truncation in calculations (such as the baud rate divisor), the actual baud rate may be a tiny percentage different than expected. For this reason, any timing calculation required for a peripheral should be performed with the new PB clock frequency instead of scaling the previous value based on a change in PB divisor ratio.

Oscillator start-up and PLL lock delays are applied when switching to a clock source that was disabled and that uses a crystal and/or the PLL. For example, assume the clock source is switched from Posc to LPRC just prior to entering Sleep in order to save power. No oscillator start-up delay would be applied when exiting Idle. However, when switching back to Posc, the appropriate PLL and/or oscillator start-up/lock delays would be applied.

The device enters Idle mode when the SLPEN (OSCCON<4>) bit is clear and a WAIT instruction is executed.

The processor will wake or exit from Idle mode on the following events:

- On any interrupt event for which the interrupt source is enabled. The priority of the interrupt event must be greater than the current priority of CPU. If the priority of the interrupt event is lower than or equal to current priority of CPU, the CPU will remain halted and the device will remain in Idle mode.
- On any form of device Reset
- On a WDT time-out interrupt

## 27.3.3 PERIPHERAL BUS SCALING METHOD

Most of the peripherals on the device are clocked using the PBCLK. The peripheral bus can be scaled relative to the SYSCLK to minimize the dynamic power consumed by the peripherals. The PBCLK divisor is controlled by PBDIV<1:0> (OSCCON<20:19>), allowing SYSCLK-to-PBCLK ratios of 1:1, 1:2, 1:4, and 1:8. All peripherals using PBCLK are affected when the divisor is changed. Peripherals such as the Interrupt Controller, DMA, Bus Matrix, and Prefetch Cache are clocked directly from SYSCLK, as a result, they are not affected by PBCLK divisor changes.

Most of the peripherals on the device are clocked using the PBCLK. The peripheral bus can be scaled relative to the SYSCLK to minimize the dynamic power consumed by the peripherals. The PBCLK divisor is controlled by PBDIV<1:0> (OSCCON<20:19>), allowing SYSCLK-to-PBCLK ratios of 1:1, 1:2, 1:4, and 1:8. All peripherals using PBCLK are affected when the divisor is changed. Peripherals such as USB, Interrupt Controller, DMA, Bus Matrix, and Prefetch Cache are clocked directly from SYSCLK, as a result, they are not affected by PBCLK divisor changes.

Changing the PBCLK divisor affects:

- The CPU to peripheral access latency. The CPU has to wait for next PBCLK edge for a read to complete. In 1:8 mode this results in a latency of one to seven SYSCLKs.
- The power consumption of the peripherals. Power consumption is directly proportional to the frequency at which the peripherals are clocked. The greater the divisor, the lower the power consumed by the peripherals.

To minimize dynamic power the PB divisor should be chosen to run the peripherals at the lowest frequency that provides acceptable system performance. When selecting a PBCLK divider, peripheral clock requirements such as baud rate accuracy should be taken into account. For example, the UART peripheral may not be able to achieve all baud rate values at some PBCLK divider depending on the SYSCLK value.

## 28.0 SPECIAL FEATURES

**Note:** This data sheet summarizes the features of the PIC32MX5XX/6XX/7XX family family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the related section in the “*PIC32MX Family Reference Manual*” (DS61132), which is available from the Microchip web site ([www.microchip.com/PIC32](http://www.microchip.com/PIC32)).

PIC32MX5XX/6XX/7XX devices include several features intended to maximize application flexibility and reliability, and minimize cost through elimination of external components. These are:

- Flexible Device Configuration
- Watchdog Timer
- JTAG Interface
- In-Circuit Serial Programming™ (ICSP™)

### 28.1 Configuration Bits

The Configuration bits can be programmed to select various device configurations.

# PIC32MX5XX/6XX/7XX

## REGISTER 28-1: DEVCFG0: DEVICE CONFIGURATION WORD 0

|        |     |     |       |        |     |     |       |
|--------|-----|-----|-------|--------|-----|-----|-------|
| r-0    | r-1 | r-1 | R/P-1 | r-1    | r-1 | r-1 | R/P-1 |
| —      | —   | —   | CP    | —      | —   | —   | BWP   |
| bit 31 |     |     |       | bit 24 |     |     |       |

|        |     |     |     |          |       |       |       |
|--------|-----|-----|-----|----------|-------|-------|-------|
| r-1    | r-1 | r-1 | r-1 | R/P-1    | R/P-1 | R/P-1 | R/P-1 |
| —      | —   | —   | —   | PWP<7:4> |       |       |       |
| bit 23 |     |     |     | bit 16   |       |       |       |

|          |       |       |       |       |     |     |     |
|----------|-------|-------|-------|-------|-----|-----|-----|
| R/P-1    | R/P-1 | R/P-1 | R/P-1 | r-1   | r-1 | r-1 | r-1 |
| PWP<3:0> |       |       |       | —     | —   | —   | —   |
| bit 15   |       |       |       | bit 8 |     |     |     |

|       |     |     |     |        |     |            |       |
|-------|-----|-----|-----|--------|-----|------------|-------|
| r-1   | r-1 | r-1 | r-1 | R/P-1  | r-1 | R/P-1      | R/P-1 |
| —     | —   | —   | —   | ICESEL | —   | DEBUG<1:0> |       |
| bit 7 |     |     |     | bit 0  |     |            |       |

### Legend:

R = Readable bit      W = Writable bit      P = Programmable bit      r = Reserved bit  
U = Unimplemented bit      -n = Bit Value at POR: ('0', '1', x = Unknown)

- bit 31      **Reserved:** Write '0'
- bit 30-29      **Reserved:** Write '1'
- bit 28      **CP:** Code-Protect bit  
Prevents boot and program Flash memory from being read or modified by an external programming device.  
1 = Protection disabled  
0 = Protection enabled
- bit 27-25      **Reserved:** Write '1'
- bit 24      **BWP:** Boot Flash Write-Protect bit  
Prevents boot Flash memory from being modified during code execution.  
1 = Boot Flash is writable  
0 = Boot Flash is not writable
- bit 23-20      **Reserved:** Write '1'

## REGISTER 28-1: DEVCFG0: DEVICE CONFIGURATION WORD 0 (CONTINUED)

|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 19-12 | <p><b>PWP&lt;7:0&gt;:</b> Program Flash Write-Protect bits</p> <p>Prevents selected program Flash memory pages from being modified during code execution. The PWP bits represent the one's compliment of the number of write protected program Flash memory pages.</p> <p>11111111 = Disabled</p> <p>11111110 = 0xBD00_0FFF</p> <p>11111101 = 0xBD00_1FFF</p> <p>11111100 = 0xBD00_2FFF</p> <p>11111011 = 0xBD00_3FFF</p> <p>11111010 = 0xBD00_4FFF</p> <p>11111001 = 0xBD00_5FFF</p> <p>11111000 = 0xBD00_6FFF</p> <p>11110111 = 0xBD00_7FFF</p> <p>11110110 = 0xBD00_8FFF</p> <p>11110101 = 0xBD00_9FFF</p> <p>11110100 = 0xBD00_AFFF</p> <p>11110011 = 0xBD00_BFFF</p> <p>11110010 = 0xBD00_CFFF</p> <p>11110001 = 0xBD00_DFFF</p> <p>11110000 = 0xBD00_EFFF</p> <p>11101111 = 0xBD00_FFFF</p> <p>•</p> <p>•</p> <p>•</p> <p>01111111 = 0xBD07_FFFF</p> |
| bit 11-4  | <p><b>Reserved:</b> Write '1'</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| bit 3     | <p><b>ICESEL:</b> In-Circuit Emulator/Debugger Communication Channel Select bit</p> <p>1 = PGEC2/PGED2 pair is used</p> <p>0 = PGEC1/PGED1 pair is used</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| bit 2     | <p><b>Reserved:</b> Write '1'</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| bit 1-0   | <p><b>DEBUG&lt;1:0&gt;:</b> Background Debugger Enable bits (forced to '11' if code-protect is enabled)</p> <p>11 = Debugger disabled</p> <p>10 = Debugger enabled</p> <p>01 = Reserved (same as '11' setting)</p> <p>00 = Reserved (same as '11' setting)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

# PIC32MX5XX/6XX/7XX

## REGISTER 28-2: DEVCFG1: DEVICE CONFIGURATION WORD 1

|        |     |     |     |        |     |     |     |
|--------|-----|-----|-----|--------|-----|-----|-----|
| r-1    | r-1 | r-1 | r-1 | r-1    | r-1 | r-1 | r-1 |
| —      | —   | —   | —   | —      | —   | —   | —   |
| bit 31 |     |     |     | bit 24 |     |     |     |

|        |     |     |            |        |       |       |       |
|--------|-----|-----|------------|--------|-------|-------|-------|
| R/P-1  | r-1 | r-1 | R/P-1      | R/P-1  | R/P-1 | R/P-1 | R/P-1 |
| FWDTEN | —   | —   | WDTPS<4:0> |        |       |       |       |
| bit 23 |     |     |            | bit 16 |       |       |       |

|            |       |             |       |       |          |             |       |
|------------|-------|-------------|-------|-------|----------|-------------|-------|
| R/P-1      | R/P-1 | R/P-1       | R/P-1 | r-1   | R/P-1    | R/P-1       | R/P-1 |
| FCKSM<1:0> |       | FPBDIV<1:0> |       | —     | OSCIOFNC | POSCMD<1:0> |       |
| bit 15     |       |             |       | bit 8 |          |             |       |

|       |     |         |     |     |            |       |       |
|-------|-----|---------|-----|-----|------------|-------|-------|
| R/P-1 | r-1 | R/P-1   | r-1 | r-1 | R/P-1      | R/P-1 | R/P-1 |
| IESO  | —   | FSOSCEN | —   | —   | FNOSC<2:0> |       |       |
| bit 7 |     |         |     |     | bit 0      |       |       |

### Legend:

R = Readable bit      W = Writable bit      P = Programmable bit      r = Reserved bit  
U = Unimplemented bit      -n = Bit Value at POR: ('0', '1', x = Unknown)

bit 31-24      **Reserved:** Write '1'

bit 23      **FWDTEN:** Watchdog Timer Enable bit  
1 = The WDT is enabled and cannot be disabled by software  
0 = The WDT is not enabled; it can be enabled in software

bit 22-21      **Reserved:** Write '1'

bit 20-16      **WDTPS<4:0>:** Watchdog Timer Postscale Select bits

10100 = 1:1048576  
10011 = 1:524288  
10010 = 1:262144  
10001 = 1:131072  
10000 = 1:65536  
01111 = 1:32768  
01110 = 1:16384  
01101 = 1:8192  
01100 = 1:4096  
01011 = 1:2048  
01010 = 1:1024  
01001 = 1:512  
01000 = 1:256  
00111 = 1:128  
00110 = 1:64  
00101 = 1:32  
00100 = 1:16  
00011 = 1:8  
00010 = 1:4  
00001 = 1:2  
00000 = 1:1

All other combinations not shown result in operation = '10100'

## REGISTER 28-2: DEVCFG1: DEVICE CONFIGURATION WORD 1 (CONTINUED)

|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 15-14 | <b>FCKSM&lt;1:0&gt;</b> : Clock Switching and Monitor Selection Configuration bits<br>1x = Clock switching is disabled, Fail-Safe Clock Monitor is disabled<br>01 = Clock switching is enabled, Fail-Safe Clock Monitor is disabled<br>00 = Clock switching is enabled, Fail-Safe Clock Monitor is enabled                                                                                                                                                                                                                                                                                     |
| bit 13-12 | <b>FPBDIV&lt;1:0&gt;</b> : Peripheral Bus Clock Divisor Default Value bits<br>11 = PBCLK is SYSCLK divided by 8<br>10 = PBCLK is SYSCLK divided by 4<br>01 = PBCLK is SYSCLK divided by 2<br>00 = PBCLK is SYSCLK divided by 1                                                                                                                                                                                                                                                                                                                                                                 |
| bit 11    | <b>Reserved</b> : Write '1'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| bit 10    | <b>OSCIOFNC</b> : CLKO Enable Configuration bit<br>1 = CLKO output signal active on the OSCO pin; primary oscillator must be disabled or configured for the External Clock mode (EC) for the CLKO to be active (POSCMD<1:0> = 11 OR 00)<br>0 = CLKO output disabled                                                                                                                                                                                                                                                                                                                            |
| bit 9-8   | <b>POSCMD&lt;1:0&gt;</b> : Primary Oscillator Configuration bits<br>11 = Primary oscillator disabled<br>10 = HS Oscillator mode selected<br>01 = XT Oscillator mode selected<br>00 = External Clock mode selected                                                                                                                                                                                                                                                                                                                                                                              |
| bit 7     | <b>IESO</b> : Internal External Switchover bit<br>1 = Internal External Switchover mode enabled (Two-Speed Start-up enabled)<br>0 = Internal External Switchover mode disabled (Two-Speed Start-up disabled)                                                                                                                                                                                                                                                                                                                                                                                   |
| bit 6     | <b>Reserved</b> : Write '1'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| bit 5     | <b>FSOSCEN</b> : Secondary Oscillator Enable bit<br>1 = Enable Secondary Oscillator<br>0 = Disable Secondary Oscillator                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| bit 4-3   | <b>Reserved</b> : Write '1'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| bit 2-0   | <b>FNOSC&lt;2:0&gt;</b> : Oscillator Selection bits<br>000 = Fast RC Oscillator (FRC)<br>001 = Fast RC Oscillator with divide-by-N with PLL module (FRCDIV+PLL)<br>010 = Primary Oscillator (XT, HS, EC) <sup>(1)</sup><br>011 = Primary Oscillator with PLL module (XT+PLL, HS+PLL, EC+PLL)<br>100 = Secondary Oscillator (Sosc)<br>101 = Low-Power RC Oscillator (LPRC)<br>110 = FRCDIV16 Fast RC Oscillator with fixed divide-by-16 postscaler<br>111 = Fast RC Oscillator with divide-by-N (FRCDIV)<br><b>Note 1:</b> Do not disable Posc (POSCMD = 00) when using this oscillator source. |

# PIC32MX5XX/6XX/7XX

## REGISTER 28-3: DEVCFG2: DEVICE CONFIGURATION WORD 2

|        |     |     |     |        |     |     |     |
|--------|-----|-----|-----|--------|-----|-----|-----|
| r-1    | r-1 | r-1 | r-1 | r-1    | r-1 | r-1 | r-1 |
| —      | —   | —   | —   | —      | —   | —   | —   |
| bit 31 |     |     |     | bit 24 |     |     |     |

|        |     |     |     |     |               |       |       |
|--------|-----|-----|-----|-----|---------------|-------|-------|
| r-1    | r-1 | r-1 | r-1 | r-1 | R/P-1         | R/P-1 | R/P-1 |
| —      | —   | —   | —   | —   | FPLLODIV<2:0> |       |       |
| bit 23 |     |     |     |     | bit 16        |       |       |

|         |     |     |     |     |               |       |       |
|---------|-----|-----|-----|-----|---------------|-------|-------|
| R/P-1   | r-1 | r-1 | r-1 | r-1 | R/P-1         | R/P-1 | R/P-1 |
| FUPLLEN | —   | —   | —   | —   | FUPLLDIV<2:0> |       |       |
| bit 15  |     |     |     |     | bit 8         |       |       |

|       |               |       |       |       |              |       |       |
|-------|---------------|-------|-------|-------|--------------|-------|-------|
| r-1   | R/P-1         | R/P-1 | R/P-1 | r-1   | R/P-1        | R/P-1 | R/P-1 |
| —     | FPLLMULT<2:0> |       |       | —     | FPLLDIV<2:0> |       |       |
| bit 7 |               |       |       | bit 0 |              |       |       |

### Legend:

R = Readable bit      W = Writable bit      P = Programmable bit      r = Reserved bit  
U = Unimplemented bit      -n = Bit Value at POR: ('0', '1', x = Unknown)

- bit 31-19      **Reserved:** Write '1'
- bit 18-16      **FPLLODIV<2:0>:** Default Postscaler for PLL bits  
111 = PLL output divided by 256  
110 = PLL output divided by 64  
101 = PLL output divided by 32  
100 = PLL output divided by 16  
011 = PLL output divided by 8  
010 = PLL output divided by 4  
001 = PLL output divided by 2  
000 = PLL output divided by 1
- bit 15      **FUPLLEN:** USB PLL Enable bit  
1 = Enable USB PLL  
0 = Disable and bypass USB PLL
- bit 14-11      **Reserved:** Write '1'
- bit 10-8      **FUPLLDIV<2:0>:** PLL Input Divider bits  
111 = 12x divider  
110 = 10x divider  
101 = 6x divider  
100 = 5x divider  
011 = 4x divider  
010 = 3x divider  
010 = 3x divider  
001 = 2x divider  
000 = 1x divider
- bit 7      **Reserved:** Write '1'

## REGISTER 28-3: DEVCFG2: DEVICE CONFIGURATION WORD 2 (CONTINUED)

|         |                                                     |
|---------|-----------------------------------------------------|
| bit 6-4 | <b>FPLLMULT&lt;2:0&gt;</b> : PLL Multiplier bits    |
|         | 111 = 24x multiplier                                |
|         | 110 = 21x multiplier                                |
|         | 101 = 20x multiplier                                |
|         | 100 = 19x multiplier                                |
|         | 011 = 18x multiplier                                |
|         | 010 = 17x multiplier                                |
|         | 001 = 16x multiplier                                |
|         | 000 = 15x multiplier                                |
| bit 3   | <b>Reserved:</b> Write '1'                          |
| bit 2-0 | <b>FPLLIDIV&lt;2:0&gt;</b> : PLL Input Divider bits |
|         | 111 = 12x divider                                   |
|         | 110 = 10x divider                                   |
|         | 101 = 6x divider                                    |
|         | 100 = 5x divider                                    |
|         | 011 = 4x divider                                    |
|         | 010 = 3x divider                                    |
|         | 001 = 2x divider                                    |
|         | 000 = 1x divider                                    |

# PIC32MX5XX/6XX/7XX

## REGISTER 28-4: DEVCFG3: DEVICE CONFIGURATION WORD 3

|         |          |     |     |     |        |        |        |
|---------|----------|-----|-----|-----|--------|--------|--------|
| R/P-1   | R/P-1    | r-1 | r-1 | r-1 | R/P-1  | R/P-1  | R/P-1  |
| FVBUSIO | FUSBIDIO | —   | —   | —   | FCANIO | FETHIO | FMIEN  |
| bit 31  |          |     |     |     |        |        | bit 24 |

|        |     |     |     |     |              |       |        |
|--------|-----|-----|-----|-----|--------------|-------|--------|
| r-1    | r-1 | r-1 | r-1 | r-1 | R/P-1        | R/P-1 | R/P-1  |
| —      | —   | —   | —   | —   | FSRSSEL<2:0> |       |        |
| bit 23 |     |     |     |     |              |       | bit 16 |

|              |       |       |       |       |       |       |       |
|--------------|-------|-------|-------|-------|-------|-------|-------|
| R/P-x        | R/P-x | R/P-x | R/P-x | R/P-x | R/P-x | R/P-x | R/P-x |
| USERID<15:8> |       |       |       |       |       |       |       |
| bit 15       |       |       |       |       |       |       | bit 8 |

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/P-x       | R/P-x | R/P-x | R/P-x | R/P-x | R/P-x | R/P-x | R/P-x |
| USERID<7:0> |       |       |       |       |       |       |       |
| bit 7       |       |       |       |       |       |       | bit 0 |

### Legend:

R = Readable bit      W = Writable bit      P = Programmable bit      r = Reserved bit  
U = Unimplemented bit      -n = Bit Value at POR: ('0', '1', x = Unknown)

- bit 31      **FVBUSIO:** USB VBUS\_ON Selection bit  
1 = VBUSON pin is controlled by the USB module  
0 = VBUSON pin is controlled by the port function
- bit 30      **FUSBIDIO:** USB USBID Selection bit  
1 = USBID pin is controlled by the USB module  
0 = USBID pin is controlled by the port function
- bit 29-27      **Reserved:** Write '1'
- bit 26      **FCANIO:** CAN I/O Pin Selection bit  
1 = Default CAN I/O Pins  
0 = Alternate CAN I/O Pins
- bit 25      **FETHIO:** Ethernet I/O Pin Selection bit  
1 = Default Ethernet I/O Pins  
0 = Alternate Ethernet I/O Pins
- bit 24      **FMIEN:** Ethernet MII Enable bit  
1 = MII enabled  
0 = RMII enabled
- bit 23-19      **Reserved:** Write '1'
- bit 18-16      **FSRSSEL<2:0>:** SRS Select bits  
111 = Assign interrupt priority 7 to a shadow register set  
110 = Assign interrupt priority 6 to a shadow register set  
•  
•  
•  
001 = Assign interrupt priority 1 to a shadow register set  
000 = All interrupt priorities are assigned to a shadow register set
- bit 15-0      **USERID<15:0>:** This is a 16-bit value that is user-defined and is readable via ICSP™ and JTAG

# PIC32MX5XX/6XX/7XX

## REGISTER 28-5: DEVID: DEVICE AND REVISION ID REGISTER

|          |   |   |   |              |   |   |   |
|----------|---|---|---|--------------|---|---|---|
| R        | R | R | R | R            | R | R | R |
| VER<3:0> |   |   |   | DEVID<27:24> |   |   |   |
| bit 31   |   |   |   | bit 24       |   |   |   |

|              |   |   |   |        |   |   |   |
|--------------|---|---|---|--------|---|---|---|
| R            | R | R | R | R      | R | R | R |
| DEVID<23:16> |   |   |   |        |   |   |   |
| bit 23       |   |   |   | bit 16 |   |   |   |

|             |   |   |   |       |   |   |   |
|-------------|---|---|---|-------|---|---|---|
| R           | R | R | R | R     | R | R | R |
| DEVID<15:8> |   |   |   |       |   |   |   |
| bit 15      |   |   |   | bit 8 |   |   |   |

|            |   |   |   |       |   |   |   |
|------------|---|---|---|-------|---|---|---|
| R          | R | R | R | R     | R | R | R |
| DEVID<7:0> |   |   |   |       |   |   |   |
| bit 7      |   |   |   | bit 0 |   |   |   |

### Legend:

R = Readable bit

W = Writable bit

P = Programmable bit

r = Reserved bit

U = Unimplemented bit

-n = Bit Value at POR: ('0', '1', x = Unknown)

bit 31-28      **VER<3:0>**: Revision Identifier bits<sup>(1)</sup>

bit 27-0      **DEVID<27:0>**: Device ID<sup>(1)</sup>

**Note:** See the “PIC32MX Flash Programming Specification” (DS61145) for a list of Revision and Device ID values.

# PIC32MX5XX/6XX/7XX

## 28.2 Watchdog Timer (WDT)


This section describes the operation of the WDT and Power-Up Timer of the PIC32MX5XX/6XX/7XX.

The WDT, when enabled, operates from the internal Low-Power Oscillator (LPRC) clock source and can be used to detect system software malfunctions by resetting the device if the WDT is not cleared periodically in software. Various WDT time-out periods can be selected using the WDT postscaler. The WDT can also be used to wake the device from Sleep or Idle mode.

The following are some of the key features of the WDT module:

- Configuration or software controlled
- User-configurable time-out period
- Can wake the device from Sleep or Idle

**FIGURE 28-1: WATCHDOG AND POWER-UP TIMER BLOCK DIAGRAM**

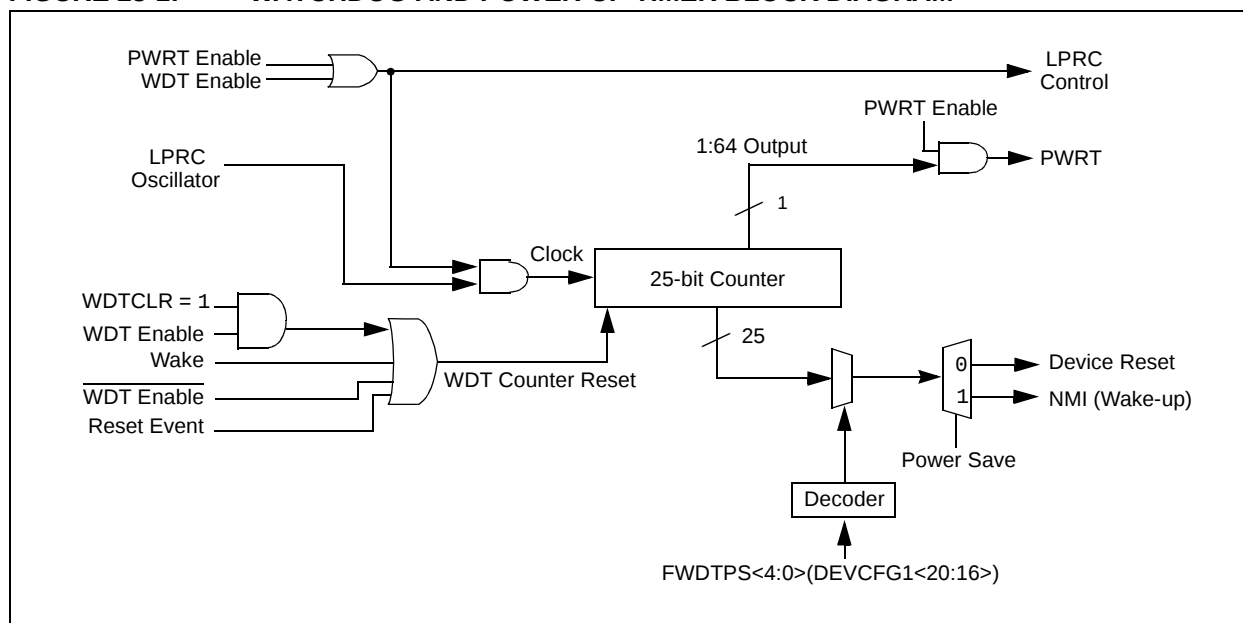

## 28.3 On-Chip Voltage Regulator

All PIC32MX5XX/6XX/7XX device's core and digital logic are designed to operate at a nominal 1.8V. To simplify system designs, most devices in the PIC32MX5XX/6XX/7XX incorporate an on-chip regulator providing the required core logic voltage from VDD.

A low-ESR capacitor (such as tantalum) must be connected to the VCAP/VDDCORE pin (Figure 28-2). This helps to maintain the stability of the regulator. The recommended value for the filter capacitor is provided in **Section 31.1 "DC Characteristics"**.

**Note:** It is important that the low-ESR capacitor is placed as close as possible to the VCAP/VDDCORE pin.

### 28.3.1 ON-CHIP REGULATOR AND POR

It takes a fixed delay for the on-chip regulator to generate output. During this time, designated as TPU, code execution is disabled. TPU is applied every time the device resumes operation after any power-down, including Sleep mode.

If the regulator is disabled, a separate Power-up Timer (PWRT) is automatically enabled. The PWRT adds a fixed delay of TPWRT at device start-up. See **Section 31.0 "Electrical Characteristics"** for more information on TPU AND TPWRT.


### 28.3.2 ON-CHIP REGULATOR AND BOR

PIC32MX5XX/6XX/7XX devices also have a simple brown-out capability. If the voltage supplied to the regulator is inadequate to maintain a regulated level, the regulator Reset circuitry will generate a Brown-out Reset. This event is captured by the BOR flag bit (RCON<1>). The brown-out voltage levels are specific in **Section 31.1 "DC Characteristics"**.

### 28.3.3 POWER-UP REQUIREMENTS

The on-chip regulator is designed to meet the power-up requirements for the device. If the application does not use the regulator, then strict power-up conditions must be adhered to. While powering up, VDDCORE must never exceed VDD by 0.3 volts.

**FIGURE 28-2: CONNECTIONS FOR THE ON-CHIP REGULATOR**

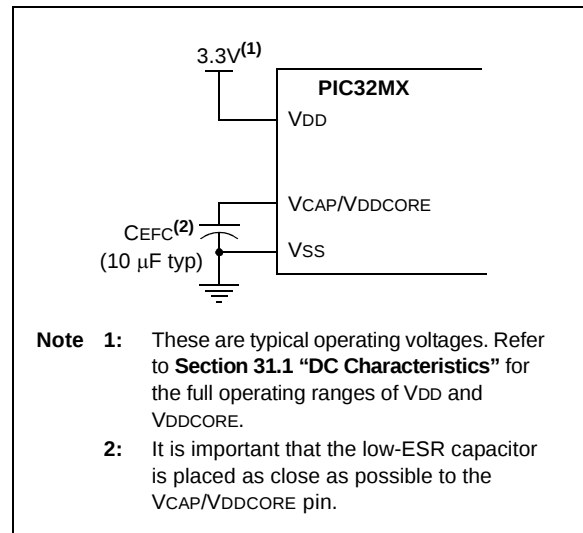

# PIC32MX5XX/6XX/7XX


## 28.4 Programming and Diagnostics

PIC32MX5XX/6XX/7XX devices provide a complete range of programming and diagnostic features that can increase the flexibility of any application using them. These features allow system designers to include:

- Simplified field programmability using two-wire In-Circuit Serial Programming™ (ICSP™) interfaces
- Debugging using ICSP
- Programming and debugging capabilities using the EJTAG extension of JTAG
- JTAG boundary scan testing for device and board diagnostics

PIC32MX devices incorporate two programming and diagnostic modules, and a trace controller, that provide a range of functions to the application developer.

**FIGURE 28-3: BLOCK DIAGRAM OF PROGRAMMING, DEBUGGING, AND TRACE PORTS**

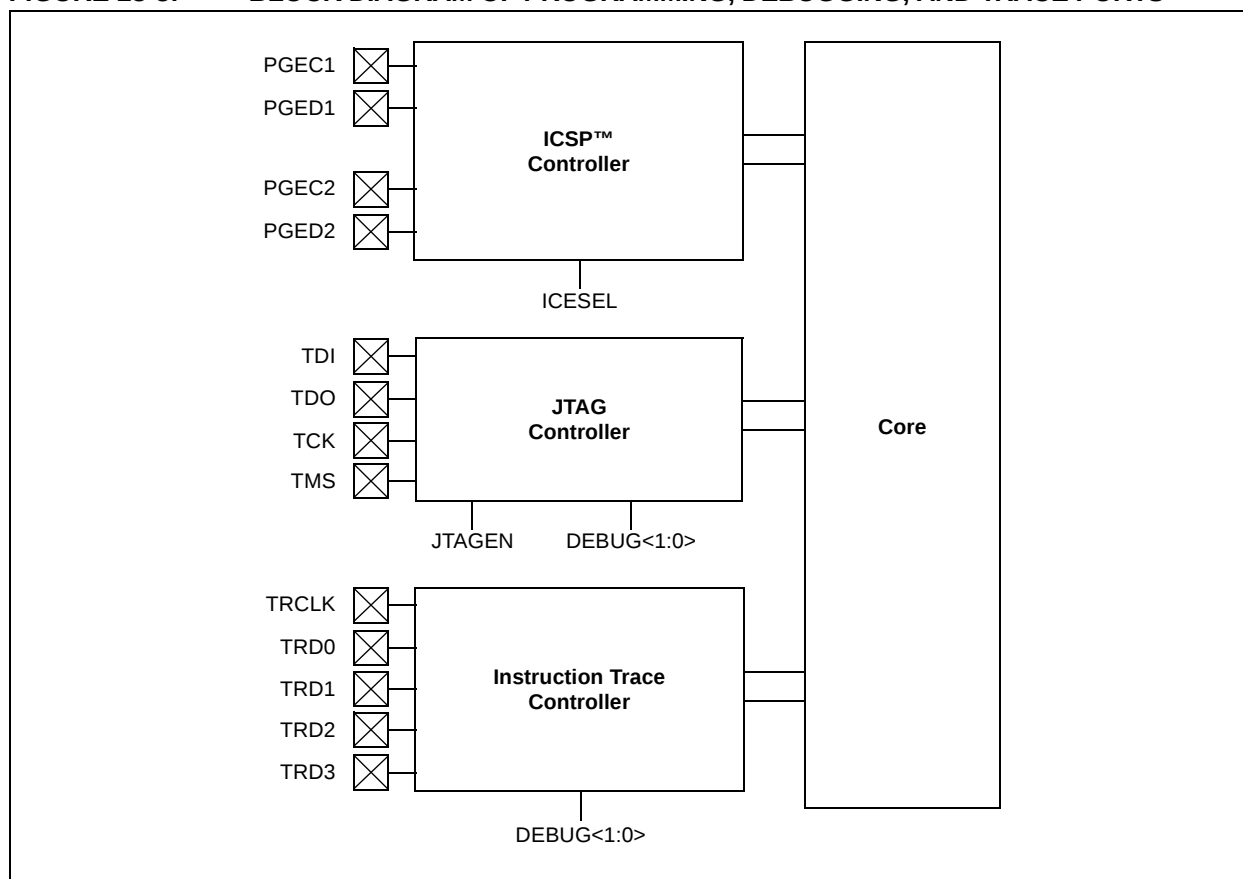

## REGISTER 28-6: DDPCON: DEBUG DATA PORT CONTROL REGISTER

|        |     |     |     |        |     |     |     |
|--------|-----|-----|-----|--------|-----|-----|-----|
| r-X    | r-X | r-X | r-X | r-X    | r-X | r-X | r-X |
| —      | —   | —   | —   | —      | —   | —   | —   |
| bit 31 |     |     |     | bit 24 |     |     |     |

|        |     |     |     |        |     |     |     |
|--------|-----|-----|-----|--------|-----|-----|-----|
| r-X    | r-X | r-X | r-X | r-X    | r-X | r-X | r-X |
| —      | —   | —   | —   | —      | —   | —   | —   |
| bit 23 |     |     |     | bit 16 |     |     |     |

|        |     |     |     |       |     |     |     |
|--------|-----|-----|-----|-------|-----|-----|-----|
| r-X    | r-X | r-X | r-X | r-X   | r-X | r-X | r-X |
| —      | —   | —   | —   | —     | —   | —   | —   |
| bit 15 |     |     |     | bit 8 |     |     |     |

|        |       |       |         |        |       |     |     |
|--------|-------|-------|---------|--------|-------|-----|-----|
| R/W-0  | R/W-0 | R/W-0 | R/W-0   | R/W-1  | R/W-0 | r-x | r-x |
| DDPUSB | DDPU1 | DDPU2 | DDPSPI1 | JTAGEN | TROEN | —   | —   |
| bit 7  |       |       |         | bit 0  |       |     |     |

### Legend:

R = Readable bit      W = Writable bit      P = Programmable bit      r = Reserved bit  
U = Unimplemented bit      -n = Bit Value at POR: ('0', '1', x = Unknown)

- bit 31-8      **Reserved:** Write '0'; ignore read
- bit 7      **DDPUSB:** Debug Data Port Enable for USB bit  
1 = USB peripheral ignores USBFRZ (U1CNFG1<5>) setting  
0 = USB peripheral follows USBFRZ setting.
- bit 6      **DDPU1:** Debug Data Port Enable for UART1 bit  
1 = UART1 peripheral ignores FRZ (U1MODE<14>) setting  
0 = UART1 peripheral follows FRZ setting
- bit 5      **DDPU2:** Debug Data Port Enable for UART2 bit  
1 = UART2 peripheral ignores FRZ (U2MODE<14>) setting  
0 = UART2 peripheral follows FRZ setting
- bit 4      **DDPSPI1:** Debug Data Port Enable for SPI1 bit  
1 = SPI1 peripheral ignores FRZ (SPI1CON<14>) setting  
0 = SPI1 peripheral follows FRZ setting
- bit 3      **JTAGEN:** JTAG Port Enable bit  
1 = Enable JTAG Port  
0 = Disable JTAG Port
- bit 2      **TROEN:** Trace Output Enable bit  
1 = Enable Trace Port  
0 = Disable Trace Port
- bit 1-0      **Reserved:** Write '1'; ignore read

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 29.0 INSTRUCTION SET

The PIC32MX5XX/6XX/7XX family instruction set complies with the MIPS32 Release 2 instruction set architecture. PIC32MX does not support the following features:

- CoreExtend instructions
- Co-processor 1 instructions
- Co-processor 2 instructions

Table 29-1 provides a summary of the instructions that are implemented by the PIC32MX5XX/6XX/7XX family core.

**Note:** Refer to “MIPS32® Architecture for Programmers Volume II: The MIPS32® Instruction Set” at [www.mips.com](http://www.mips.com) for more information.

**TABLE 29-1: MIPS32® INSTRUCTION SET**

| Instruction | Description                                                            | Function                                                                                                   |
|-------------|------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| ADD         | Integer Add                                                            | $Rd = Rs + Rt$                                                                                             |
| ADDI        | Integer Add Immediate                                                  | $Rt = Rs + \text{Immed}$                                                                                   |
| ADDIU       | Unsigned Integer Add Immediate                                         | $Rt = Rs +_U \text{Immed}$                                                                                 |
| ADDU        | Unsigned Integer Add                                                   | $Rd = Rs +_U Rt$                                                                                           |
| AND         | Logical AND                                                            | $Rd = Rs \& Rt$                                                                                            |
| ANDI        | Logical AND Immediate                                                  | $Rt = Rs \& (0_{16} \parallel \text{Immed})$                                                               |
| B           | Unconditional Branch<br>(Assembler idiom for: BEQ r0, r0, offset)      | $PC += (\text{int})\text{offset}$                                                                          |
| BAL         | Branch and Link<br>(Assembler idiom for: BGEZAL r0, offset)            | $GPR[31] = PC + 8$<br>$PC += (\text{int})\text{offset}$                                                    |
| BEQ         | Branch On Equal                                                        | if $Rs == Rt$<br>$PC += (\text{int})\text{offset}$                                                         |
| BEQL        | Branch On Equal Likely <sup>(1)</sup>                                  | if $Rs == Rt$<br>$PC += (\text{int})\text{offset}$<br>else<br>Ignore Next Instruction                      |
| BGEZ        | Branch on Greater Than or Equal To Zero                                | if $!Rs[31]$<br>$PC += (\text{int})\text{offset}$                                                          |
| BGEZAL      | Branch on Greater Than or Equal To Zero And Link                       | $GPR[31] = PC + 8$<br>if $!Rs[31]$<br>$PC += (\text{int})\text{offset}$                                    |
| BGEZALL     | Branch on Greater Than or Equal To Zero And Link Likely <sup>(1)</sup> | $GPR[31] = PC + 8$<br>if $!Rs[31]$<br>$PC += (\text{int})\text{offset}$<br>else<br>Ignore Next Instruction |
| BGEZL       | Branch on Greater Than or Equal To Zero Likely <sup>(1)</sup>          | if $!Rs[31]$<br>$PC += (\text{int})\text{offset}$<br>else<br>Ignore Next Instruction                       |
| BGTZ        | Branch on Greater Than Zero                                            | if $!Rs[31] \&\& Rs != 0$<br>$PC += (\text{int})\text{offset}$                                             |
| BGTZL       | Branch on Greater Than Zero Likely <sup>(1)</sup>                      | if $!Rs[31] \&\& Rs != 0$<br>$PC += (\text{int})\text{offset}$<br>else<br>Ignore Next Instruction          |
| BLEZ        | Branch on Less Than or Equal to Zero                                   | if $Rs[31] \parallel Rs == 0$<br>$PC += (\text{int})\text{offset}$                                         |

**Note 1:** This instruction is deprecated and should not be used.

# PIC32MX5XX/6XX/7XX

**TABLE 29-1: MIPS32® INSTRUCTION SET (CONTINUED)**

| Instruction | Description                                                | Function                                                                                               |
|-------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| BLEZL       | Branch on Less Than or Equal to Zero Likely <sup>(1)</sup> | if Rs[31]    Rs == 0<br>PC += (int)offset<br>else<br>Ignore Next Instruction                           |
| BLTZ        | Branch on Less Than Zero                                   | if Rs[31]<br>PC += (int)offset                                                                         |
| BLTZAL      | Branch on Less Than Zero And Link <sup>(1)</sup>           | GPR[31] = PC + 8<br>if Rs[31]<br>PC += (int)offset                                                     |
| BLTZALL     | Branch on Less Than Zero And Link Likely <sup>(1)</sup>    | GPR[31] = PC + 8<br>if Rs[31]<br>PC += (int)offset<br>else<br>Ignore Next Instruction                  |
| BLTZL       | Branch on Less Than Zero Likely <sup>(1)</sup>             | if Rs[31]<br>PC += (int)offset<br>else<br>Ignore Next Instruction                                      |
| BNE         | Branch on Not Equal                                        | if Rs != Rt<br>PC += (int)offset                                                                       |
| BNEL        | Branch on Not Equal Likely <sup>(1)</sup>                  | if Rs != Rt<br>PC += (int)offset<br>else<br>Ignore Next Instruction                                    |
| BREAK       | Breakpoint                                                 | Break Exception                                                                                        |
| CLO         | Count Leading Ones                                         | Rd = NumLeadingOnes(Rs)                                                                                |
| CLZ         | Count Leading Zeroes                                       | Rd = NumLeadingZeroes(Rs)                                                                              |
| DERET       | Return from Debug Exception                                | PC = DEPC<br>Exit Debug Mode                                                                           |
| DI          | Atomically Disable Interrupts                              | Rt = Status; Status <sub>IE</sub> = 0                                                                  |
| DIV         | Divide                                                     | LO = (int)Rs / (int)Rt<br>HI = (int)Rs % (int)Rt                                                       |
| DIVU        | Unsigned Divide                                            | LO = (uns)Rs / (uns)Rt<br>HI = (uns)Rs % (uns)Rt                                                       |
| EHB         | Execution Hazard Barrier                                   | Stop instruction execution<br>until execution hazards are<br>cleared                                   |
| EI          | Atomically Enable Interrupts                               | Rt = Status; Status <sub>IE</sub> = 1                                                                  |
| ERET        | Return from Exception                                      | if StatusERL[2]<br>PC = ErrorEPC<br>else<br>PC = EPC<br>StatusEXL[1] = 0<br>StatusERL[2] = 0<br>LL = 0 |
| EXT         | Extract Bit Field                                          | Rt = ExtractField(Rs, pos,<br>size)                                                                    |

**Note 1:** This instruction is deprecated and should not be used.

**TABLE 29-1: MIPS32® INSTRUCTION SET (CONTINUED)**

| Instruction | Description                                        | Function                                                                                |
|-------------|----------------------------------------------------|-----------------------------------------------------------------------------------------|
| INS         | Insert Bit Field                                   | $Rt = \text{InsertField}(Rs, Rt, pos, size)$                                            |
| J           | Unconditional Jump                                 | $PC = PC[31:28] \parallel offset \ll 2$                                                 |
| JAL         | Jump and Link                                      | $GPR[31] = PC + 8$<br>$PC = PC[31:28] \parallel offset \ll 2$                           |
| JALR        | Jump and Link Register                             | $Rd = PC + 8$<br>$PC = Rs$                                                              |
| JALR.HB     | Jump and Link Register with Hazard Barrier         | Like JALR, but also clears execution and instruction hazards                            |
| JR          | Jump Register                                      | $PC = Rs$                                                                               |
| JR.HB       | Jump Register with Hazard Barrier                  | Like JR, but also clears execution and instruction hazards                              |
| LB          | Load Byte                                          | $Rt = (\text{byte})\text{Mem}[Rs+offset]$                                               |
| LBU         | Unsigned Load Byte                                 | $Rt = (\text{ubyte})\text{Mem}[Rs+offset]$                                              |
| LH          | Load Halfword                                      | $Rt = (\text{half})\text{Mem}[Rs+offset]$                                               |
| LHU         | Unsigned Load Halfword                             | $Rt = (\text{uhalf})\text{Mem}[Rs+offset]$                                              |
| LL          | Load Linked Word                                   | $Rt = \text{Mem}[Rs+offset]$<br>$LLbit = 1$<br>$LLAdr = Rs + offset$                    |
| LUI         | Load Upper Immediate                               | $Rt = \text{immediate} \ll 16$                                                          |
| LW          | Load Word                                          | $Rt = \text{Mem}[Rs+offset]$                                                            |
| LWPC        | Load Word, PC relative                             | $Rt = \text{Mem}[PC+offset]$                                                            |
| LWL         | Load Word Left                                     | $Rt = Rt \text{ Merge Mem}[Rs+offset]$                                                  |
| LWR         | Load Word Right                                    | $Rt = Rt \text{ Merge Mem}[Rs+offset]$                                                  |
| MADD        | Multiply-Add                                       | $HI \mid LO += (\text{int})Rs * (\text{int})Rt$                                         |
| MADDU       | Multiply-Add Unsigned                              | $HI \mid LO += (\text{uns})Rs * (\text{uns})Rt$                                         |
| MFC0        | Move From Co-processor 0                           | $Rt = CPR[0, Rd, sel]$                                                                  |
| MFHI        | Move From HI                                       | $Rd = HI$                                                                               |
| MFLO        | Move From LO                                       | $Rd = LO$                                                                               |
| MOVN        | Move Conditional on Not Zero                       | if $Rt \neq 0$ then<br>$Rd = Rs$                                                        |
| MOVZ        | Move Conditional on Zero                           | if $Rt = 0$ then<br>$Rd = Rs$                                                           |
| MSUB        | Multiply-Subtract                                  | $HI \mid LO -= (\text{int})Rs * (\text{int})Rt$                                         |
| MSUBU       | Multiply-Subtract Unsigned                         | $HI \mid LO -= (\text{uns})Rs * (\text{uns})Rt$                                         |
| MTC0        | Move To Co-processor 0                             | $CPR[0, n, Sel] = Rt$                                                                   |
| MTHI        | Move To HI                                         | $HI = Rs$                                                                               |
| MTLO        | Move To LO                                         | $LO = Rs$                                                                               |
| MUL         | Multiply with register write                       | $HI \mid LO = \text{Unpredictable}$<br>$Rd = ((\text{int})Rs * (\text{int})Rt)_{31..0}$ |
| MULT        | Integer Multiply                                   | $HI \mid LO = (\text{int})Rs * (\text{int})Rd$                                          |
| MULTU       | Unsigned Multiply                                  | $HI \mid LO = (\text{uns})Rs * (\text{uns})Rd$                                          |
| NOP         | No Operation (Assembler idiom for: SLL r0, r0, r0) |                                                                                         |

**Note 1:** This instruction is deprecated and should not be used.

# PIC32MX5XX/6XX/7XX

**TABLE 29-1: MIPS32® INSTRUCTION SET (CONTINUED)**

| Instruction | Description                                            | Function                                            |
|-------------|--------------------------------------------------------|-----------------------------------------------------|
| NOR         | Logical NOR                                            | $Rd = \sim(Rs \mid Rt)$                             |
| OR          | Logical OR                                             | $Rd = Rs \mid Rt$                                   |
| ORI         | Logical OR Immediate                                   | $Rt = Rs \mid Immed$                                |
| RDHWR       | Read Hardware Register (if enabled by HWREna register) | $Rt = HWR[Rd]$                                      |
| RDPGPR      | Read GPR from Previous Shadow Set                      | $Rt = SGPR[SRSCtl_{pss}, Rd]$                       |
| ROTR        | Rotate Word Right                                      | $Rd = Rt_{sa-1..0} \parallel Rt_{31..sa}$           |
| ROTRV       | Rotate Word Right Variable                             | $Rd = Rt_{Rs-1..0} \parallel Rt_{31..Rs}$           |
| SB          | Store Byte                                             | $(byte)Mem[Rs+offset] = Rt$                         |
| SC          | Store Conditional Word                                 | if LLbit = 1<br>$mem[Rs+offset] = Rt$<br>Rt = LLbit |
| SDBBP       | Software Debug Break Point                             | Trap to SW Debug Handler                            |
| SEB         | Sign-Extend Byte                                       | $Rd = SignExtend(Rs-7..0)$                          |
| SEH         | Sign-Extend Half                                       | $Rd = SignExtend(Rs-15..0)$                         |
| SH          | Store Half                                             | $(half)Mem[Rs+offset] = Rt$                         |
| SLL         | Shift Left Logical                                     | $Rd = Rt \ll sa$                                    |
| SLLV        | Shift Left Logical Variable                            | $Rd = Rt \ll Rs[4:0]$                               |
| SLT         | Set on Less Than                                       | if (int)Rs < (int)Rt<br>Rd = 1<br>else<br>Rd = 0    |
| SLTI        | Set on Less Than Immediate                             | if (int)Rs < (int)Immed<br>Rt = 1<br>else<br>Rt = 0 |
| SLTIU       | Set on Less Than Immediate Unsigned                    | if (uns)Rs < (uns)Immed<br>Rt = 1<br>else<br>Rt = 0 |
| SLTU        | Set on Less Than Unsigned                              | if (uns)Rs < (uns)Immed<br>Rd = 1<br>else<br>Rd = 0 |
| SRA         | Shift Right Arithmetic                                 | $Rd = (int)Rt \gg sa$                               |
| SRAV        | Shift Right Arithmetic Variable                        | $Rd = (int)Rt \gg Rs[4:0]$                          |
| SRL         | Shift Right Logical                                    | $Rd = (uns)Rt \gg sa$                               |
| SRLV        | Shift Right Logical Variable                           | $Rd = (uns)Rt \gg Rs[4:0]$                          |
| SSNOP       | Superscalar Inhibit No Operation                       | NOP                                                 |
| SUB         | Integer Subtract                                       | $Rt = (int)Rs - (int)Rd$                            |
| SUBU        | Unsigned Subtract                                      | $Rt = (uns)Rs - (uns)Rd$                            |
| SW          | Store Word                                             | $Mem[Rs+offset] = Rt$                               |
| SWL         | Store Word Left                                        | $Mem[Rs+offset] = Rt$                               |
| SWR         | Store Word Right                                       | $Mem[Rs+offset] = Rt$                               |

**Note 1:** This instruction is deprecated and should not be used.

**TABLE 29-1: MIPS32® INSTRUCTION SET (CONTINUED)**

| Instruction | Description                                      | Function                                                                                          |
|-------------|--------------------------------------------------|---------------------------------------------------------------------------------------------------|
| SYNC        | Synchronize                                      | Orders the cached coherent and uncached loads and stores for access to shared memory              |
| SYSCALL     | System Call                                      | SystemCallException                                                                               |
| TEQ         | Trap if Equal                                    | if Rs == Rt<br>TrapException                                                                      |
| TEQI        | Trap if Equal Immediate                          | if Rs == (int)Immed<br>TrapException                                                              |
| TGE         | Trap if Greater Than or Equal                    | if (int)Rs >= (int)Rt<br>TrapException                                                            |
| TGEI        | Trap if Greater Than or Equal Immediate          | if (int)Rs >= (int)Immed<br>TrapException                                                         |
| TGEIU       | Trap if Greater Than or Equal Immediate Unsigned | if (uns)Rs >= (uns)Immed<br>TrapException                                                         |
| TGEU        | Trap if Greater Than or Equal Unsigned           | if (uns)Rs >= (uns)Rt<br>TrapException                                                            |
| TLT         | Trap if Less Than                                | if (int)Rs < (int)Rt<br>TrapException                                                             |
| TLTI        | Trap if Less Than Immediate                      | if (int)Rs < (int)Immed<br>TrapException                                                          |
| TLTIU       | Trap if Less Than Immediate Unsigned             | if (uns)Rs < (uns)Immed<br>TrapException                                                          |
| TLTU        | Trap if Less Than Unsigned                       | if (uns)Rs < (uns)Rt<br>TrapException                                                             |
| TNE         | Trap if Not Equal                                | if Rs != Rt<br>TrapException                                                                      |
| TNEI        | Trap if Not Equal Immediate                      | if Rs != (int)Immed<br>TrapException                                                              |
| WAIT        | Wait for Interrupt                               | Go to a low-power mode and stall until an interrupt occurs                                        |
| WRPGPR      | Write to GPR in Previous Shadow Set              | SGPR[SRSCtl <sub>PSS</sub> , Rd] = Rt                                                             |
| WSBH        | Word Swap Bytes Within Halfwords                 | Rd = Rt <sub>23..16</sub>    Rt <sub>31..24</sub>   <br>Rt <sub>7..0</sub>    Rt <sub>15..8</sub> |
| XOR         | Exclusive OR                                     | Rd = Rs ^ Rt                                                                                      |
| XORI        | Exclusive OR Immediate                           | Rt = Rs ^ (uns)Immed                                                                              |

**Note 1:** This instruction is deprecated and should not be used.

# PIC32MX5XX/6XX/7XX

---

NOTES:

## 30.0 DEVELOPMENT SUPPORT

The PIC® microcontrollers and dsPIC® digital signal controllers are supported with a full range of software and hardware development tools:

- Integrated Development Environment
  - MPLAB® IDE Software
- Compilers/Assemblers/Linkers
  - MPLAB C Compiler for Various Device Families
  - HI-TECH C for Various Device Families
  - MPASM™ Assembler
  - MPLINK™ Object Linker/  
MPLIB™ Object Librarian
  - MPLAB Assembler/Linker/Librarian for Various Device Families
- Simulators
  - MPLAB SIM Software Simulator
- Emulators
  - MPLAB REAL ICE™ In-Circuit Emulator
- In-Circuit Debuggers
  - MPLAB ICD 3
  - PICKit™ 3 Debug Express
- Device Programmers
  - PICKit™ 2 Programmer
  - MPLAB PM3 Device Programmer
- Low-Cost Demonstration/Development Boards, Evaluation Kits, and Starter Kits

## 30.1 MPLAB Integrated Development Environment Software

The MPLAB IDE software brings an ease of software development previously unseen in the 8/16/32-bit microcontroller market. The MPLAB IDE is a Windows® operating system-based application that contains:

- A single graphical interface to all debugging tools
  - Simulator
  - Programmer (sold separately)
  - In-Circuit Emulator (sold separately)
  - In-Circuit Debugger (sold separately)
- A full-featured editor with color-coded context
- A multiple project manager
- Customizable data windows with direct edit of contents
- High-level source code debugging
- Mouse over variable inspection
- Drag and drop variables from source to watch windows
- Extensive on-line help
- Integration of select third party tools, such as IAR C Compilers

The MPLAB IDE allows you to:

- Edit your source files (either C or assembly)
- One-touch compile or assemble, and download to emulator and simulator tools (automatically updates all project information)
- Debug using:
  - Source files (C or assembly)
  - Mixed C and assembly
  - Machine code

MPLAB IDE supports multiple debugging tools in a single development paradigm, from the cost-effective simulators, through low-cost in-circuit debuggers, to full-featured emulators. This eliminates the learning curve when upgrading to tools with increased flexibility and power.

## 30.2 MPLAB C Compilers for Various Device Families

The MPLAB C Compiler code development systems are complete ANSI C compilers for Microchip's PIC18, PIC24 and PIC32 families of microcontrollers and the dsPIC30 and dsPIC33 families of digital signal controllers. These compilers provide powerful integration capabilities, superior code optimization and ease of use.

For easy source level debugging, the compilers provide symbol information that is optimized to the MPLAB IDE debugger.

## 30.3 HI-TECH C for Various Device Families

The HI-TECH C Compiler code development systems are complete ANSI C compilers for Microchip's PIC family of microcontrollers and the dsPIC family of digital signal controllers. These compilers provide powerful integration capabilities, omniscient code generation and ease of use.

For easy source level debugging, the compilers provide symbol information that is optimized to the MPLAB IDE debugger.

The compilers include a macro assembler, linker, pre-processor, and one-step driver, and can run on multiple platforms.

## 30.4 MPASM Assembler

The MPASM Assembler is a full-featured, universal macro assembler for PIC10/12/16/18 MCUs.

The MPASM Assembler generates relocatable object files for the MPLINK Object Linker, Intel® standard HEX files, MAP files to detail memory usage and symbol reference, absolute LST files that contain source lines and generated machine code and COFF files for debugging.

The MPASM Assembler features include:

- Integration into MPLAB IDE projects
- User-defined macros to streamline assembly code
- Conditional assembly for multi-purpose source files
- Directives that allow complete control over the assembly process

## 30.5 MPLINK Object Linker/ MPLIB Object Librarian

The MPLINK Object Linker combines relocatable objects created by the MPASM Assembler and the MPLAB C18 C Compiler. It can link relocatable objects from precompiled libraries, using directives from a linker script.

The MPLIB Object Librarian manages the creation and modification of library files of precompiled code. When a routine from a library is called from a source file, only the modules that contain that routine will be linked in with the application. This allows large libraries to be used efficiently in many different applications.

The object linker/library features include:

- Efficient linking of single libraries instead of many smaller files
- Enhanced code maintainability by grouping related modules together
- Flexible creation of libraries with easy module listing, replacement, deletion and extraction

## 30.6 MPLAB Assembler, Linker and Librarian for Various Device Families

MPLAB Assembler produces relocatable machine code from symbolic assembly language for PIC24, PIC32 and dsPIC devices. MPLAB C Compiler uses the assembler to produce its object file. The assembler generates relocatable object files that can then be archived or linked with other relocatable object files and archives to create an executable file. Notable features of the assembler include:

- Support for the entire device instruction set
- Support for fixed-point and floating-point data
- Command line interface
- Rich directive set
- Flexible macro language
- MPLAB IDE compatibility

## 30.7 MPLAB SIM Software Simulator

The MPLAB SIM Software Simulator allows code development in a PC-hosted environment by simulating the PIC MCUs and dsPIC® DSCs on an instruction level. On any given instruction, the data areas can be examined or modified and stimuli can be applied from a comprehensive stimulus controller. Registers can be logged to files for further run-time analysis. The trace buffer and logic analyzer display extend the power of the simulator to record and track program execution, actions on I/O, most peripherals and internal registers.

The MPLAB SIM Software Simulator fully supports symbolic debugging using the MPLAB C Compilers, and the MPASM and MPLAB Assemblers. The software simulator offers the flexibility to develop and debug code outside of the hardware laboratory environment, making it an excellent, economical software development tool.

## 30.8 MPLAB REAL ICE In-Circuit Emulator System

MPLAB REAL ICE In-Circuit Emulator System is Microchip's next generation high-speed emulator for Microchip Flash DSC and MCU devices. It debugs and programs PIC® Flash MCUs and dsPIC® Flash DSCs with the easy-to-use, powerful graphical user interface of the MPLAB Integrated Development Environment (IDE), included with each kit.

The emulator is connected to the design engineer's PC using a high-speed USB 2.0 interface and is connected to the target with either a connector compatible with in-circuit debugger systems (RJ11) or with the new high-speed, noise tolerant, Low-Voltage Differential Signal (LVDS) interconnection (CAT5).

The emulator is field upgradable through future firmware downloads in MPLAB IDE. In upcoming releases of MPLAB IDE, new devices will be supported, and new features will be added. MPLAB REAL ICE offers significant advantages over competitive emulators including low-cost, full-speed emulation, run-time variable watches, trace analysis, complex breakpoints, a ruggedized probe interface and long (up to three meters) interconnection cables.

## 30.9 MPLAB ICD 3 In-Circuit Debugger System

MPLAB ICD 3 In-Circuit Debugger System is Microchip's most cost effective high-speed hardware debugger/programmer for Microchip Flash Digital Signal Controller (DSC) and microcontroller (MCU) devices. It debugs and programs PIC® Flash microcontrollers and dsPIC® DSCs with the powerful, yet easy-to-use graphical user interface of MPLAB Integrated Development Environment (IDE).

The MPLAB ICD 3 In-Circuit Debugger probe is connected to the design engineer's PC using a high-speed USB 2.0 interface and is connected to the target with a connector compatible with the MPLAB ICD 2 or MPLAB REAL ICE systems (RJ-11). MPLAB ICD 3 supports all MPLAB ICD 2 headers.

## 30.10 PICkit 3 In-Circuit Debugger/Programmer and PICkit 3 Debug Express

The MPLAB PICkit 3 allows debugging and programming of PIC® and dsPIC® Flash microcontrollers at a most affordable price point using the powerful graphical user interface of the MPLAB Integrated Development Environment (IDE). The MPLAB PICkit 3 is connected to the design engineer's PC using a full speed USB interface and can be connected to the target via an Microchip debug (RJ-11) connector (compatible with MPLAB ICD 3 and MPLAB REAL ICE). The connector uses two device I/O pins and the reset line to implement in-circuit debugging and In-Circuit Serial Programming™.

The PICkit 3 Debug Express include the PICkit 3, demo board and microcontroller, hookup cables and CDROM with user's guide, lessons, tutorial, compiler and MPLAB IDE software.

## 30.11 PICkit 2 Development Programmer/Debugger and PICkit 2 Debug Express

The PICkit™ 2 Development Programmer/Debugger is a low-cost development tool with an easy to use interface for programming and debugging Microchip's Flash families of microcontrollers. The full featured Windows® programming interface supports baseline (PIC10F, PIC12F5xx, PIC16F5xx), midrange (PIC12F6xx, PIC16F), PIC18F, PIC24, dsPIC30, dsPIC33, and PIC32 families of 8-bit, 16-bit, and 32-bit microcontrollers, and many Microchip Serial EEPROM products. With Microchip's powerful MPLAB Integrated Development Environment (IDE) the PICkit™ 2 enables in-circuit debugging on most PIC® microcontrollers. In-Circuit-Debugging runs, halts and single steps the program while the PIC microcontroller is embedded in the application. When halted at a breakpoint, the file registers can be examined and modified.

The PICkit 2 Debug Express include the PICkit 2, demo board and microcontroller, hookup cables and CDROM with user's guide, lessons, tutorial, compiler and MPLAB IDE software.

## 30.12 MPLAB PM3 Device Programmer

The MPLAB PM3 Device Programmer is a universal, CE compliant device programmer with programmable voltage verification at VDDMIN and VDDMAX for maximum reliability. It features a large LCD display (128 x 64) for menus and error messages and a modular, detachable socket assembly to support various package types. The ICSP™ cable assembly is included as a standard item. In Stand-Alone mode, the MPLAB PM3 Device Programmer can read, verify and program PIC devices without a PC connection. It can also set code protection in this mode. The MPLAB PM3 connects to the host PC via an RS-232 or USB cable. The MPLAB PM3 has high-speed communications and optimized algorithms for quick programming of large memory devices and incorporates an MMC card for file storage and data applications.

## 30.13 Demonstration/Development Boards, Evaluation Kits, and Starter Kits

A wide variety of demonstration, development and evaluation boards for various PIC MCUs and dsPIC DSCs allows quick application development on fully functional systems. Most boards include prototyping areas for adding custom circuitry and provide application firmware and source code for examination and modification.

The boards support a variety of features, including LEDs, temperature sensors, switches, speakers, RS-232 interfaces, LCD displays, potentiometers and additional EEPROM memory.

The demonstration and development boards can be used in teaching environments, for prototyping custom circuits and for learning about various microcontroller applications.

In addition to the PICDEM™ and dsPICDEM™ demonstration/development board series of circuits, Microchip has a line of evaluation kits and demonstration software for analog filter design, KEELOQ® security ICs, CAN, IrDA®, PowerSmart battery management, SEEVAL® evaluation system, Sigma-Delta ADC, flow rate sensing, plus many more.

Also available are starter kits that contain everything needed to experience the specified device. This usually includes a single application and debug capability, all on one board.

Check the Microchip web page ([www.microchip.com](http://www.microchip.com)) for the complete list of demonstration, development and evaluation kits.

## 31.0 ELECTRICAL CHARACTERISTICS

This section provides an overview of PIC32MX5XX/6XX/7XX electrical characteristics. Additional information will be provided in future revisions of this document as it becomes available.

Absolute maximum ratings for the PIC32MX5XX/6XX/7XX are listed below. Exposure to these maximum rating conditions for extended periods may affect device reliability. Functional operation of the device at these or any other conditions above the parameters indicated in the operation listings of this specification is not implied.

### Absolute Maximum Ratings (Note 1)

|                                                                                            |                       |
|--------------------------------------------------------------------------------------------|-----------------------|
| Ambient temperature under bias .....                                                       | -40°C to +85°C        |
| Storage temperature .....                                                                  | -65°C to +150°C       |
| Voltage on VDD with respect to VSS .....                                                   | -0.3V to +4.0V        |
| Voltage on any pin that is not 5V tolerant, with respect to VSS ( <b>Note 3</b> ) .....    | -0.3V to (VDD + 0.3V) |
| Voltage on any 5V tolerant pin with respect to VSS when VDD ≥ 2.3V ( <b>Note 3</b> ) ..... | -0.3V to +5.5V        |
| Voltage on any 5V tolerant pin with respect to VSS when VDD < 2.3V ( <b>Note 3</b> ) ..... | -0.3V to (VDD + 0.3V) |
| Voltage on VDDCORE with respect to VSS .....                                               | -0.3V to 2.0V         |
| Maximum current out of VSS pin(s) .....                                                    | 300 mA                |
| Maximum current into VDD pin(s) ( <b>Note 2</b> ) .....                                    | 300 mA                |
| Maximum output current sunk by any I/O pin .....                                           | 25 mA                 |
| Maximum output current sourced by any I/O pin .....                                        | 25 mA                 |
| Maximum current sunk by all ports .....                                                    | 200 mA                |
| Maximum current sourced by all ports ( <b>Note 2</b> ) .....                               | 200 mA                |

- |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Note 1:</b> Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operation listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.</p> <p><b>2:</b> Maximum allowable current is a function of device maximum power dissipation (see Table 31-2).</p> <p><b>3:</b> See the “Pin Diagrams” section for the 5V tolerant pins.</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

# PIC32MX5XX/6XX/7XX

## 31.1 DC Characteristics

**TABLE 31-1: OPERATING MIPS VS. VOLTAGE**

| Characteristic | VDD Range<br>(in Volts) | Temp. Range<br>(in °C) | Max. Frequency         |
|----------------|-------------------------|------------------------|------------------------|
|                |                         |                        | PIC32MX5XX/6XX/7XX     |
| DC5            | 2.3-3.6V                | -40°C to +85°C         | 80 MHz <b>(Note 1)</b> |

**Note 1:** 40 MHz maximum for PIC32MX 40 MHz family variants.

**TABLE 31-2: THERMAL OPERATING CONDITIONS**

| Rating                                                                                                                                                                                                              | Symbol | Min.                        | Typical | Max. | Unit |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------------------------|---------|------|------|
| PIC32MX5XX/6XX/7XX                                                                                                                                                                                                  |        |                             |         |      |      |
| Operating Junction Temperature Range                                                                                                                                                                                | TJ     | -40                         | —       | +125 | °C   |
| Operating Ambient Temperature Range                                                                                                                                                                                 | TA     | -40                         | —       | +85  | °C   |
| Power Dissipation:<br>Internal Chip Power Dissipation:<br>$P_{INT} = V_{DD} \times (I_{DD} - S I_{OH})$<br>I/O Pin Power Dissipation:<br>$I/O = S \{ (V_{DD} - V_{OH}) \times I_{OH} \} + S (V_{OL} \times I_{OL})$ | PD     | PINT + PI/O                 |         |      | W    |
| Maximum Allowed Power Dissipation                                                                                                                                                                                   | PDMAX  | $(T_J - T_A) / \theta_{JA}$ |         |      | W    |

**TABLE 31-3: THERMAL PACKAGING CHARACTERISTICS**

| Characteristics                                         | Symbol        | Typical | Max. | Unit | Notes    |
|---------------------------------------------------------|---------------|---------|------|------|----------|
| Package Thermal Resistance, 121-Pin XBGA (10x10x1.1 mm) | $\theta_{JA}$ | 40      | —    | °C/W | <b>1</b> |
| Package Thermal Resistance, 100-Pin TQFP (14x14x1 mm)   | $\theta_{JA}$ | 43      | —    | °C/W | <b>1</b> |
| Package Thermal Resistance, 100-Pin TQFP (12x12x1 mm)   | $\theta_{JA}$ | 43      | —    | °C/W | <b>1</b> |
| Package Thermal Resistance, 64-Pin TQFP (10x10x1 mm)    | $\theta_{JA}$ | 47      | —    | °C/W | <b>1</b> |
| Package Thermal Resistance, 64-Pin QFN (9x9x0.9 mm)     | $\theta_{JA}$ | 28      | —    | °C/W | <b>1</b> |

**Note 1:** Junction to ambient thermal resistance, Theta-JA ( $\theta_{JA}$ ) numbers are achieved by package simulations.

**TABLE 31-4: DC TEMPERATURE AND VOLTAGE SPECIFICATIONS**

| DC CHARACTERISTICS       |                       |                                                                         | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |         |       |            |            |
|--------------------------|-----------------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------|------------|------------|
| Param. No.               | Symbol                | Characteristics                                                         | Min.                                                                                                                                                                     | Typical | Max.  | Units      | Conditions |
| <b>Operating Voltage</b> |                       |                                                                         |                                                                                                                                                                          |         |       |            |            |
| DC10                     | <b>Supply Voltage</b> |                                                                         |                                                                                                                                                                          |         |       |            |            |
|                          | VDD                   |                                                                         | 2.3                                                                                                                                                                      | —       | 3.6   | V          |            |
| DC12                     | VDR                   | <b>RAM Data Retention Voltage (Note 1)</b>                              | 1.75                                                                                                                                                                     | —       | —     | V          |            |
| DC16                     | VPOR                  | <b>VDD Start Voltage</b><br>to Ensure Internal<br>Power-on Reset Signal | 1.75                                                                                                                                                                     | —       | 1.95  | V          |            |
| DC17                     | SVDD                  | <b>VDD Rise Rate</b><br>to Ensure Internal<br>Power-on Reset Signal     | 0.00005                                                                                                                                                                  | —       | 0.115 | V/ $\mu$ s |            |

**Note 1:** This is the limit to which VDD can be lowered without losing RAM data.

**TABLE 31-5: DC CHARACTERISTICS: OPERATING CURRENT (IDD)**

| DC CHARACTERISTICS                       |                        |      | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial |                           |      |                           |
|------------------------------------------|------------------------|------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------|---------------------------|
| Parameter No.                            | Typical <sup>(3)</sup> | Max. | Units                                                                                                                                  | Conditions                |      |                           |
| Operating Current (IDD) <sup>(1,2)</sup> |                        |      |                                                                                                                                        |                           |      |                           |
| DC20                                     | 6                      | 9    | mA                                                                                                                                     | Code executing from Flash | —    | 4 MHz                     |
| DC20c                                    | 4                      | —    | mA                                                                                                                                     | Code executing from SRAM  | —    |                           |
| DC21                                     | 37                     | 40   | mA                                                                                                                                     | Code executing from Flash | —    | 25 MHz<br>(Note 4)        |
| DC21c                                    | 25                     | —    | mA                                                                                                                                     | Code executing from SRAM  | —    |                           |
| DC22                                     | 64                     | 70   | mA                                                                                                                                     | Code executing from Flash | —    | 60 MHz<br>(Note 4)        |
| DC22c                                    | 61                     | —    | mA                                                                                                                                     | Code executing from SRAM  | —    |                           |
| DC23                                     | 85                     | 98   | mA                                                                                                                                     | Code executing from Flash | —    | 80 MHz                    |
| DC23c                                    | 85                     | —    | mA                                                                                                                                     | Code executing from SRAM  | —    |                           |
| DC25a                                    | 125                    | 150  | μA                                                                                                                                     | +25°C                     | 3.3V | LPRC (31 kHz)<br>(Note 4) |

- Note 1:** A device's IDD supply current is mainly a function of the operating voltage and frequency. Other factors, such as PBCLK (Peripheral Bus Clock) frequency, number of peripheral modules enabled, internal code execution pattern, execution from Program Flash memory vs. SRAM, I/O pin loading and switching rate, oscillator type as well as temperature can have an impact on the current consumption.
- 2:** The test conditions for IDD measurements are as follows: Oscillator mode = EC+PLL with OSC1 driven by external square wave from rail-to-rail and PBCLK divisor = 1:8. CPU, Program Flash and SRAM data memory are operational, Program Flash memory Wait states = 7, program cache and prefetch are disabled and SRAM data memory Wait states = 1. All peripheral modules are disabled (ON bit = 0). WDT and FSCM are disabled. All I/O pins are configured as inputs and pulled to Vss. MCLR = VDD.
- 3:** Data in "Typical" column is at 3.3V, 25°C at specified operating frequency unless otherwise stated. Parameters are for design guidance only and are not tested.
- 4:** This parameter is characterized, but not tested in manufacturing.

# PIC32MX5XX/6XX/7XX

**TABLE 31-6: DC CHARACTERISTICS: IDLE CURRENT (I<sub>IDLE</sub>)**

| DC CHARACTERISTICS                                            |                        |      | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial |                 |      |                           |
|---------------------------------------------------------------|------------------------|------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|---------------------------|
| Parameter No.                                                 | Typical <sup>(2)</sup> | Max. | Units                                                                                                                                  | Conditions      |      |                           |
| Idle Current (IDLE): Core OFF, Clock ON Base Current (Note 1) |                        |      |                                                                                                                                        |                 |      |                           |
| DC30                                                          | 4.5                    | 6.5  | mA                                                                                                                                     | 4 MHz           |      |                           |
| DC31                                                          | 13                     | 15   | mA                                                                                                                                     | 25 MHz (Note 3) |      |                           |
| DC32                                                          | 28                     | 30   | mA                                                                                                                                     | 60 MHz (Note 3) |      |                           |
| DC33                                                          | 36                     | 42   | mA                                                                                                                                     | 80 MHz          |      |                           |
| DC34                                                          | —                      | 40   | μA                                                                                                                                     | -40°C           | 2.3V | LPRC (31 kHz)<br>(Note 3) |
| DC34a                                                         | —                      | 75   | μA                                                                                                                                     | +25°C           |      |                           |
| DC34b                                                         | —                      | 800  | μA                                                                                                                                     | +85°C           |      |                           |
| DC35                                                          | 35                     | —    | μA                                                                                                                                     | -40°C           | 3.3V |                           |
| DC35a                                                         | 65                     | —    | μA                                                                                                                                     | +25°C           |      |                           |
| DC35b                                                         | 600                    | —    | μA                                                                                                                                     | +85°C           |      |                           |
| DC36                                                          | —                      | 43   | μA                                                                                                                                     | -40°C           | 3.6V |                           |
| DC36a                                                         | —                      | 106  | μA                                                                                                                                     | +25°C           |      |                           |
| DC36b                                                         | —                      | 800  | μA                                                                                                                                     | +85°C           |      |                           |

- Note 1:** The test conditions for base I<sub>IDLE</sub> current measurements are as follows: System clock is enabled and PBCLK divisor = 1:8. CPU in Idle mode (CPU core halted). Only digital peripheral modules are enabled (ON bit = 1) and being clocked. WDT and FSCM are disabled. All I/O pins are configured as inputs and pulled to V<sub>SS</sub>. MCLR = V<sub>DD</sub>.
- 2:** Data in “Typical” column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.
- 3:** This parameter is characterized, but not tested in manufacturing.

**TABLE 31-7: DC CHARACTERISTICS: POWER-DOWN CURRENT (I<sub>PD</sub>)**

| DC CHARACTERISTICS                |                        |      | Standard Operating Conditions: 2.3V to 3.6V (unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial |            |                                                    |
|-----------------------------------|------------------------|------|-------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------|
| Parameter No.                     | Typical <sup>(2)</sup> | Max. | Units                                                                                                                               | Conditions |                                                    |
| Power-Down Current (IPD) (Note 1) |                        |      |                                                                                                                                     |            |                                                    |
| DC40                              | 10                     | 40   | μA                                                                                                                                  | -40°C      | 2.3V<br><br>Base Power-Down Current (Note 6)       |
| DC40a                             | 36                     | 100  | μA                                                                                                                                  | +25°C      |                                                    |
| DC40b                             | 400                    | 720  | μA                                                                                                                                  | +85°C      |                                                    |
| DC40c                             | 41                     | 120  | μA                                                                                                                                  | +25°C      | 3.3V<br><br>Base Power-Down Current                |
| DC40d                             | 22                     | 80   | μA                                                                                                                                  | -40°C      | 3.6V<br><br>Base Power-Down Current                |
| DC40e                             | 42                     | 120  | μA                                                                                                                                  | +25°C      |                                                    |
| DC40g                             | 315                    | 400  | μA                                                                                                                                  | +70°C      |                                                    |
| DC40f                             | 410                    | 800  | μA                                                                                                                                  | +85°C      |                                                    |
| Module Differential Current       |                        |      |                                                                                                                                     |            |                                                    |
| DC41                              | —                      | 10   | μA                                                                                                                                  | 2.3V       | Watchdog Timer Current: ΔIWDT (Notes 3, 6)         |
| DC41c                             | 5                      | —    | μA                                                                                                                                  | 3.3V       | Watchdog Timer Current: ΔIWDT (Note 3)             |
| DC41d                             | —                      | 20   | μA                                                                                                                                  | 3.6V       | Watchdog Timer Current: ΔIWDT (Note 3)             |
| DC42                              | —                      | 40   | μA                                                                                                                                  | 2.3V       | RTCC + Timer1 w/32kHz Crystal: ΔIRTCC (Notes 3, 6) |
| DC42c                             | 23                     | —    | μA                                                                                                                                  | 3.3V       | RTCC + Timer1 w/32kHz Crystal: ΔIRTCC (Note 3)     |
| DC42e                             | —                      | 50   | μA                                                                                                                                  | 3.6V       | RTCC + Timer1 w/32kHz Crystal: ΔIRTCC (Note 3)     |
| DC43                              | —                      | 1300 | μA                                                                                                                                  | 2.5V       | ADC: ΔIADC (Notes 3, 4, 6)                         |
| DC43c                             | 1100                   | —    | μA                                                                                                                                  | 3.3V       | ADC: ΔIADC (Notes 3, 4)                            |
| DC43e                             | —                      | 1300 | μA                                                                                                                                  | 3.6V       | ADC: ΔIADC (Notes 3, 4)                            |

- Note 1:** Base I<sub>PD</sub> is measured with all digital peripheral modules enabled (ON bit = 1) and being clocked, CPU clock is disabled. All I/Os are configured as outputs and pulled low. WDT and FSCM are disabled.
- 2:** Data in the “Typical” column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.
- 3:** The Δ current is the additional current consumed when the module is enabled. This current should be added to the base I<sub>PD</sub> current.
- 4:** Test conditions for ADC module differential current are as follows: Internal ADC RC oscillator enabled.
- 5:** Data is characterized at +70°C and not tested. Parameter is for design guidance only.
- 6:** This parameter is characterized, but not tested in manufacturing.

# PIC32MX5XX/6XX/7XX

**TABLE 31-8: DC CHARACTERISTICS: I/O PIN INPUT SPECIFICATIONS**

| DC CHARACTERISTICS |                 |                                                                 | Standard Operating Conditions: 2.3V to 3.6V (unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                        |                      |       |                                                                                 |
|--------------------|-----------------|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------------------|-------|---------------------------------------------------------------------------------|
| Param. No.         | Symbol          | Characteristics                                                 | Min.                                                                                                                                                                  | Typical <sup>(1)</sup> | Max.                 | Units | Conditions                                                                      |
| DI10               | V <sub>IL</sub> | <b>Input Low Voltage</b><br>I/O pins:<br>with TTL Buffer        | V <sub>SS</sub>                                                                                                                                                       | —                      | 0.15 V <sub>DD</sub> | V     | (Note 4)                                                                        |
|                    |                 | with Schmitt Trigger Buffer                                     | V <sub>SS</sub>                                                                                                                                                       | —                      | 0.2 V <sub>DD</sub>  | V     | (Note 4)                                                                        |
| DI15               |                 | $\overline{\text{MCLR}}$                                        | V <sub>SS</sub>                                                                                                                                                       | —                      | 0.2 V <sub>DD</sub>  | V     | (Note 4)                                                                        |
| DI16               |                 | OSC1 (XT mode)                                                  | V <sub>SS</sub>                                                                                                                                                       | —                      | 0.2 V <sub>DD</sub>  | V     | (Note 4)                                                                        |
| DI17               |                 | OSC1 (HS mode)                                                  | V <sub>SS</sub>                                                                                                                                                       | —                      | 0.2 V <sub>DD</sub>  | V     | (Note 4)                                                                        |
| DI18               |                 | SDAx, SCLx                                                      | V <sub>SS</sub>                                                                                                                                                       | —                      | 0.3 V <sub>DD</sub>  | V     | SMBus disabled<br>(Note 4)                                                      |
| DI19               |                 | SDAx, SCLx                                                      | V <sub>SS</sub>                                                                                                                                                       | —                      | 0.8                  | V     | SMBus enabled<br>(Note 4)                                                       |
| DI20               | V <sub>IH</sub> | <b>Input High Voltage</b><br>I/O pins:<br>with Analog Functions | 0.8 V <sub>DD</sub>                                                                                                                                                   | —                      | V <sub>DD</sub>      | V     | (Note 4)                                                                        |
|                    |                 | Digital Only                                                    | 0.8 V <sub>DD</sub>                                                                                                                                                   | —                      |                      | V     | (Note 4)                                                                        |
|                    |                 | with TTL Buffer                                                 | 0.25V <sub>DD</sub> + 0.8v                                                                                                                                            | —                      | 5.5                  | V     | (Note 4)                                                                        |
|                    |                 | with Schmitt Trigger Buffer                                     | 0.8 V <sub>DD</sub>                                                                                                                                                   | —                      | 5.5                  | V     | (Note 4)                                                                        |
| DI25               |                 | $\overline{\text{MCLR}}$                                        | 0.8 V <sub>DD</sub>                                                                                                                                                   | —                      | V <sub>DD</sub>      | V     | (Note 4)                                                                        |
| DI26               |                 | OSC1 (XT mode)                                                  | 0.7 V <sub>DD</sub>                                                                                                                                                   | —                      | V <sub>DD</sub>      | V     | (Note 4)                                                                        |
| DI27               |                 | OSC1 (HS mode)                                                  | 0.7 V <sub>DD</sub>                                                                                                                                                   | —                      | V <sub>DD</sub>      | V     | (Note 4)                                                                        |
| DI28               |                 | SDAx, SCLx                                                      | 0.7 V <sub>DD</sub>                                                                                                                                                   | —                      | 5.5                  | V     | SMBus disabled<br>(Note 4)                                                      |
| DI29               |                 | SDAx, SCLx                                                      | 2.1                                                                                                                                                                   | —                      | 5.5                  | V     | SMBus enabled,<br>2.3V ≤ V <sub>PIN</sub> ≤ 5.5<br>(Note 4)                     |
| DI30               | ICNPU           | <b>CNxx Pull up Current</b>                                     | 50                                                                                                                                                                    | 250                    | 400                  | μA    | V <sub>DD</sub> = 3.3V, V <sub>PIN</sub> = V <sub>SS</sub>                      |
|                    | I <sub>IL</sub> | <b>Input Leakage Current (Note 3)</b>                           |                                                                                                                                                                       |                        |                      |       |                                                                                 |
| DI50               |                 | I/O Ports                                                       | —                                                                                                                                                                     | —                      | ±1                   | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub> ,<br>Pin at high-impedance |
| DI51               |                 | Analog Input Pins                                               | —                                                                                                                                                                     | —                      | ±1                   | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub> ,<br>Pin at high-impedance |
| DI55               |                 | $\overline{\text{MCLR}}$                                        | —                                                                                                                                                                     | —                      | ±1                   | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub>                            |
| DI56               |                 | OSC1                                                            | —                                                                                                                                                                     | —                      | ±1                   | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub> ,<br>XT and HS modes       |

- Note 1:** Data in "Typical" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.
- 2:** The leakage current on the  $\overline{\text{MCLR}}$  pin is strongly dependent on the applied voltage level. The specified levels represent normal operating conditions. Higher leakage current may be measured at different input voltages.
- 3:** Negative current is defined as current sourced by the pin.
- 4:** This parameter is characterized, but not tested in manufacturing.

**TABLE 31-9: DC CHARACTERISTICS: I/O PIN OUTPUT SPECIFICATIONS**

| DC CHARACTERISTICS |                 |                                         | Standard Operating Conditions: 2.3V to 3.6V (unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |         |      |       |                                                  |
|--------------------|-----------------|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|-------|--------------------------------------------------|
| Param. No.         | Symbol          | Characteristics                         | Min.                                                                                                                                                                  | Typical | Max. | Units | Conditions                                       |
| DO10               | VO <sub>L</sub> | <b>Output Low Voltage</b><br>I/O Ports  | —                                                                                                                                                                     | —       | 0.4  | V     | I <sub>OL</sub> = 7 mA, V <sub>DD</sub> = 3.6V   |
|                    |                 |                                         | —                                                                                                                                                                     | —       | 0.4  | V     | I <sub>OL</sub> = 6 mA, V <sub>DD</sub> = 2.3V   |
| DO16               |                 | OSC2/CLKO                               | —                                                                                                                                                                     | —       | 0.4  | V     | I <sub>OL</sub> = 3.5 mA, V <sub>DD</sub> = 3.6V |
|                    |                 |                                         | —                                                                                                                                                                     | —       | 0.4  | V     | I <sub>OL</sub> = 2.5 mA, V <sub>DD</sub> = 2.3V |
| DO20               | VO <sub>H</sub> | <b>Output High Voltage</b><br>I/O Ports | 2.4                                                                                                                                                                   | —       | —    | V     | I <sub>OH</sub> = -12 mA, V <sub>DD</sub> = 3.6V |
|                    |                 |                                         | 1.4                                                                                                                                                                   | —       | —    | V     | I <sub>OH</sub> = -12 mA, V <sub>DD</sub> = 2.3V |
| DO26               |                 | OSC2/CLKO                               | 2.4                                                                                                                                                                   | —       | —    | V     | I <sub>OH</sub> = -12 mA, V <sub>DD</sub> = 3.6V |
|                    |                 |                                         | 1.4                                                                                                                                                                   | —       | —    | V     | I <sub>OH</sub> = -12 mA, V <sub>DD</sub> = 2.3V |

**TABLE 31-10: DC CHARACTERISTICS: PROGRAM MEMORY<sup>(3)</sup>**

| DC CHARACTERISTICS |                   |                                                         | Standard Operating Conditions: 2.3V to 3.6V (unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>Programming temperature $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$ (25°C recommended) |                        |      |       |                                               |
|--------------------|-------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|-------|-----------------------------------------------|
| Param. No.         | Symbol            | Characteristics                                         | Min.                                                                                                                                                                                                                                                                      | Typical <sup>(1)</sup> | Max. | Units | Conditions                                    |
| D130               | EP                | <b>Program Flash Memory</b><br>Cell Endurance           | 1000                                                                                                                                                                                                                                                                      | —                      | —    | E/W   | -40°C to +85°C                                |
| D131               | V <sub>PR</sub>   | V <sub>DD</sub> for Read                                | V <sub>MIN</sub>                                                                                                                                                                                                                                                          | —                      | 3.6  | V     | V <sub>MIN</sub> = Minimum operating voltage  |
| D132               | V <sub>PEW</sub>  | V <sub>DD</sub> for Erase or Write                      | 3.0                                                                                                                                                                                                                                                                       | —                      | 3.6  | V     | 0°C to +40°C                                  |
| D134               | T <sub>RETD</sub> | Characteristic Retention                                | 20                                                                                                                                                                                                                                                                        | —                      | —    | Year  | Provided no other specifications are violated |
| D135               | I <sub>DDP</sub>  | Supply Current during Programming                       | —                                                                                                                                                                                                                                                                         | 10                     | —    | mA    | 0°C to +40°C                                  |
|                    | T <sub>WW</sub>   | Word Write Cycle Time                                   | 20                                                                                                                                                                                                                                                                        | —                      | 40   | μs    | 0°C to +40°C                                  |
| D136               | T <sub>RW</sub>   | Row Write Cycle Time<br>(Note 2)<br>(128 words per row) | 3                                                                                                                                                                                                                                                                         | 4.5                    | —    | ms    | 0°C to +40°C                                  |
| D137               | T <sub>PE</sub>   | Page Erase Cycle Time                                   | 20                                                                                                                                                                                                                                                                        | —                      | —    | ms    | 0°C to +40°C                                  |
|                    | T <sub>CE</sub>   | Chip Erase Cycle Time                                   | 80                                                                                                                                                                                                                                                                        | —                      | —    | ms    | 0°C to +40°C                                  |

**Note 1:** Data in “Typical” column is at 3.3V, 25°C unless otherwise stated.

**2:** The minimum SYSCLK for row programming is 4 MHz. Care should be taken to minimize bus activities during row programming, such as suspending any memory-to-memory DMA operations. If heavy bus loads are expected, selecting Bus Matrix Arbitration mode 2 (rotating priority) may be necessary. The default Arbitration mode is mode 1 (CPU has lowest priority).

**3:** Refer to “PIC32MX Flash Programming Specification” (DS61145) for operating conditions during programming and erase cycles.

# PIC32MX5XX/6XX/7XX

**TABLE 31-11: PROGRAM FLASH MEMORY WAIT STATE CHARACTERISTICS**

| DC CHARACTERISTICS         |          | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |          |
|----------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| Required Flash wait states | SYSCLK   | Units                                                                                                                                                                    | Comments |
| 0 Wait State               | 0 to 30  | MHz                                                                                                                                                                      |          |
| 1 Wait State               | 31 to 60 |                                                                                                                                                                          |          |
| 2 Wait States              | 61 to 80 |                                                                                                                                                                          |          |

**TABLE 31-12: COMPARATOR SPECIFICATIONS**

| DC CHARACTERISTICS |                   |                                    | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |         |                 |       |                                                                                            |
|--------------------|-------------------|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-------|--------------------------------------------------------------------------------------------|
| Param. No.         | Symbol            | Characteristics                    | Min.                                                                                                                                                                     | Typical | Max.            | Units | Comments                                                                                   |
| D300               | V <sub>IOFF</sub> | Input Offset Voltage               | —                                                                                                                                                                        | ±7.5    | ±25             | mV    | AV <sub>DD</sub> = V <sub>DD</sub> ,<br>AV <sub>SS</sub> = V <sub>SS</sub>                 |
| D301               | V <sub>ICM</sub>  | Input Common Mode Voltage          | 0                                                                                                                                                                        | —       | V <sub>DD</sub> | V     | AV <sub>DD</sub> = V <sub>DD</sub> ,<br>AV <sub>SS</sub> = V <sub>SS</sub><br>(Note 2)     |
| D302               | CMRR              | Common Mode Rejection Ratio        | 55                                                                                                                                                                       | —       | —               | dB    | Max V <sub>ICM</sub> = (V <sub>DD</sub> - 1)V<br>(Note 2)                                  |
| D303               | T <sub>RESP</sub> | Response Time                      | —                                                                                                                                                                        | 150     | 400             | ns    | AV <sub>DD</sub> = V <sub>DD</sub> ,<br>AV <sub>SS</sub> = V <sub>SS</sub><br>(Notes 1, 2) |
| D304               | ON2OV             | Comparator Enabled to Output Valid | —                                                                                                                                                                        | —       | 10              | μs    | Comparator module is configured before setting the comparator ON bit.<br>(Note 2)          |

**Note 1:** Response time measured with one comparator input at  $(V_{DD} - 1.5)/2$ , while the other input transitions from V<sub>SS</sub> to V<sub>DD</sub>.

**2:** These parameters are characterized but not tested.

**TABLE 31-13: VOLTAGE REFERENCE SPECIFICATIONS**

| DC CHARACTERISTICS |        |                              | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |         |        |       |          |
|--------------------|--------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------|--------|-------|----------|
| Param. No.         | Symbol | Characteristics              | Min.                                                                                                                                | Typical | Max.   | Units | Comments |
| D310               | VRES   | Resolution                   | VDD/24                                                                                                                              | —       | VDD/32 | LSb   |          |
| D311               | VRAA   | Absolute Accuracy            | —                                                                                                                                   | —       | 1/2    | LSb   |          |
| D312               | TSET   | Settling Time <sup>(1)</sup> | —                                                                                                                                   | —       | 10     | μs    |          |
| D313               | VIREF  | Internal Voltage Reference   | —                                                                                                                                   | 0.6     | —      | V     |          |

**Note 1:** Settling time measured while CVRR = 1 and CVR3:CVR0 transitions from '0000' to '1111'. This parameter is characterized, but not tested in manufacturing.

**TABLE 31-14: INTERNAL VOLTAGE REGULATOR SPECIFICATIONS**

| DC CHARACTERISTICS |         |                                 | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |         |      |       |                                                 |
|--------------------|---------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------|------|-------|-------------------------------------------------|
| Param. No.         | Symbol  | Characteristics                 | Min.                                                                                                                                | Typical | Max. | Units | Comments                                        |
| D320               | VDDCORE | Regulator Output Voltage        | 1.62                                                                                                                                | 1.80    | 1.98 | V     |                                                 |
| D321               | CEFC    | External Filter Capacitor Value | 8                                                                                                                                   | 10      | —    | μF    | Capacitor must be low series resistance (1 ohm) |
| D322               | TPWRT   | Power-up Timer Period           | —                                                                                                                                   | 64      | —    | ms    |                                                 |

# PIC32MX5XX/6XX/7XX


## 31.2 AC Characteristics and Timing Parameters

The information contained in this section defines PIC32MX5XX/6XX/7XX AC characteristics and timing parameters.

**TABLE 31-15: AC CHARACTERISTICS**

|                           |                                                                                                                                                                                                                   |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AC CHARACTERISTICS</b> | <b>Standard Operating Conditions: 2.3V to 3.6V (unless otherwise stated)</b><br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>Operating voltage $V_{DD}$ range. |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**FIGURE 31-1: LOAD CONDITIONS FOR DEVICE TIMING SPECIFICATIONS**

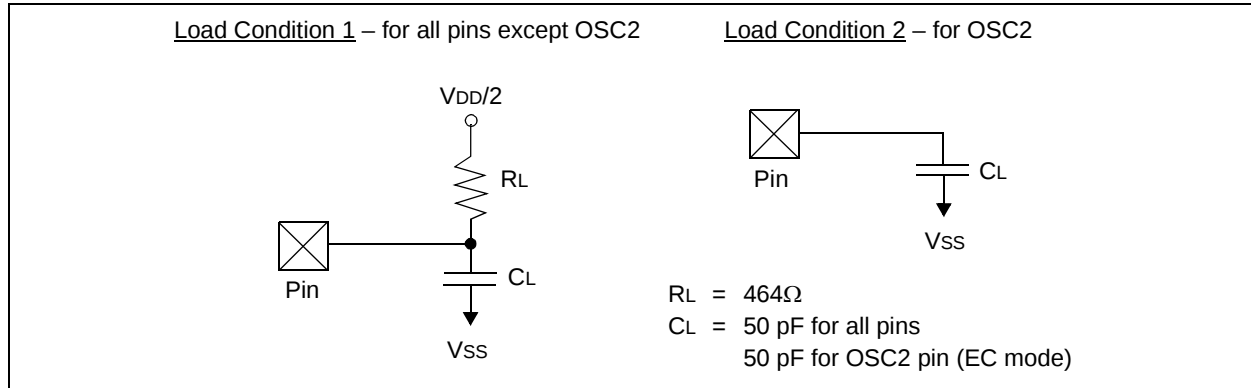


**TABLE 31-16: CAPACITIVE LOADING REQUIREMENTS ON OUTPUT PINS**

| <b>AC CHARACTERISTICS</b> |                 |                       | <b>Standard Operating Conditions: 2.3V to 3.6V (unless otherwise stated)</b><br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                        |      |       |                           |
|---------------------------|-----------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|-------|---------------------------|
| Param. No.                | Symbol          | Characteristics       | Min.                                                                                                                                                                         | Typical <sup>(1)</sup> | Max. | Units | Conditions                |
| DO56                      | C <sub>IO</sub> | All I/O pins and OSC2 | —                                                                                                                                                                            | —                      | 50   | pF    | EC mode                   |
| DO58                      | C <sub>B</sub>  | SCLx, SDAx            | —                                                                                                                                                                            | —                      | 400  | pF    | In I <sup>2</sup> C™ mode |

**Note 1:** Data in "Typical" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**FIGURE 31-2: EXTERNAL CLOCK TIMING**

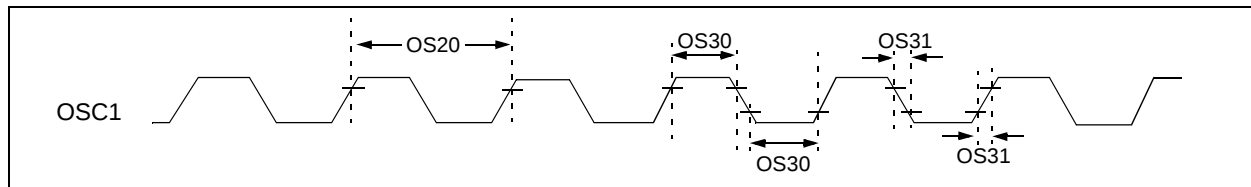

**TABLE 31-17: EXTERNAL CLOCK TIMING REQUIREMENTS**

| AC CHARACTERISTICS |               |                                                                                                                  | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |                        |                            |            |                                      |
|--------------------|---------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------------------------|------------|--------------------------------------|
| Param. No.         | Symbol        | Characteristics                                                                                                  | Min.                                                                                                                                | Typical <sup>(1)</sup> | Max.                       | Units      | Conditions                           |
| OS10               | Fosc          | External CLKI Frequency<br>(External clocks allowed only in EC and ECPLL modes)                                  | DC<br>4                                                                                                                             | —<br>—                 | 50 (Note 3)<br>50 (Note 5) | MHz<br>MHz | EC (Note 5)<br>ECPLL (Note 4)        |
| OS11               |               | Oscillator Crystal Frequency                                                                                     | 3                                                                                                                                   | —                      | 10                         | MHz        | XT (Note 5)                          |
| OS12               |               |                                                                                                                  | 4                                                                                                                                   | —                      | 10                         | MHz        | XTPLL<br>(Notes 4, 5)                |
| OS13               |               |                                                                                                                  | 10                                                                                                                                  | —                      | 25                         | MHz        | HS (Note 5)                          |
| OS14               |               |                                                                                                                  | 10                                                                                                                                  | —                      | 25                         | MHz        | HSPLL<br>(Notes 4, 5)                |
| OS15               |               |                                                                                                                  | 32                                                                                                                                  | 32.768                 | 100                        | kHz        | Sosc (Note 5)                        |
| OS20               | Tosc          | Tosc = 1/Fosc = Tcy (Note 2)                                                                                     | —                                                                                                                                   | —                      | —                          | —          | See parameter OS10 for Fosc value    |
| OS30               | TosL,<br>TosH | External Clock In (OSC1)<br>High or Low Time                                                                     | 0.45 x Tosc                                                                                                                         | —                      | —                          | ns         | EC (Note 5)                          |
| OS31               | TosR,<br>TosF | External Clock In (OSC1)<br>Rise or Fall Time                                                                    | —                                                                                                                                   | —                      | 0.05 x Tosc                | ns         | EC (Note 5)                          |
| OS40               | TOST          | Oscillator Start-up Timer Period<br>(Only applies to HS, HSPLL,<br>XT, XTPLL and Sosc Clock<br>Oscillator modes) | —                                                                                                                                   | 1024                   | —                          | Tosc       | (Note 5)                             |
| OS41               | TFSCM         | Primary Clock Fail Safe<br>Time-out Period                                                                       | —                                                                                                                                   | 2                      | —                          | ms         | (Note 5)                             |
| OS42               | GM            | External Oscillator<br>Transconductance                                                                          | —                                                                                                                                   | 12                     | —                          | mA/V       | VDD = 3.3V<br>TA = +25°C<br>(Note 5) |

- Note 1:** Data in “Typical” column is at 3.3V, 25°C unless otherwise stated. Parameters are characterized but are not tested.
- 2:** Instruction cycle period (Tcy) equals the input oscillator time base period. All specified values are based on characterization data for that particular oscillator type under standard operating conditions with the device executing code. Exceeding these specified limits may result in an unstable oscillator operation and/or higher than expected current consumption. All devices are tested to operate at “min.” values with an external clock applied to the OSC1/CLKI pin.
- 3:** 40 MHz maximum for PIC32MX 40 MHz family variants.
- 4:** PLL input requirements: 4 MHz ≤ F<sub>PLLIN</sub> ≤ 5 MHz (use PLL prescaler to reduce Fosc). This parameter is characterized, but tested at 10 MHz only at manufacturing.
- 5:** This parameter is characterized, but not tested in manufacturing.

# PIC32MX5XX/6XX/7XX

**TABLE 31-18: PLL CLOCK TIMING SPECIFICATIONS (V<sub>DD</sub> = 2.3V TO 3.6V)**

| AC CHARACTERISTICS |        | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |       |                        |       |       |                                   |
|--------------------|--------|-------------------------------------------------------------------------------------------------------------------------------------|-------|------------------------|-------|-------|-----------------------------------|
| Param. No.         | Symbol | Characteristics <sup>(1)</sup>                                                                                                      | Min.  | Typical <sup>(2)</sup> | Max.  | Units | Conditions                        |
| OS50               | FPLLI  | PLL Voltage Controlled Oscillator (VCO) Input Frequency Range                                                                       | 4     | —                      | 5     | MHz   | ECPLL, HSPLL, XTPLL, FRCPLL modes |
| OS51               | FSYS   | On-Chip VCO System Frequency                                                                                                        | 60    | —                      | 120   | MHz   |                                   |
| OS52               | TLOCK  | PLL Start-up Time (Lock Time)                                                                                                       | —     | —                      | 2     | ms    |                                   |
| OS53               | DCLK   | CLKO Stability (Period Jitter or Cumulative)                                                                                        | -0.25 | —                      | +0.25 | %     | Measured over 100 ms period       |

**Note 1:** These parameters are characterized, but not tested in manufacturing.

**Note 2:** Data in “Typical” column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**TABLE 31-19: INTERNAL FRC ACCURACY**

| AC CHARACTERISTICS                        |                 | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for industrial |         |      |       |            |
|-------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------|---------|------|-------|------------|
| Param. No.                                | Characteristics | Min.                                                                                                                                | Typical | Max. | Units | Conditions |
| Internal FRC Accuracy @ 8.00 MHz (Note 1) |                 |                                                                                                                                     |         |      |       |            |
| F20                                       | FRC             | -2                                                                                                                                  | —       | +2   | %     |            |


**Note 1:** Frequency calibrated at 25°C and 3.3V. TUN bits can be used to compensate for temperature drift.

**TABLE 31-20: INTERNAL RC ACCURACY**

| AC CHARACTERISTICS        |                 | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |         |      |       |            |
|---------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------|---------|------|-------|------------|
| Param. No.                | Characteristics | Min.                                                                                                                                | Typical | Max. | Units | Conditions |
| LPRC @ 31.25 kHz (Note 1) |                 |                                                                                                                                     |         |      |       |            |
| F21                       | LPRC            | -15                                                                                                                                 | —       | +15  | %     |            |

**Note 1:** Change of LPRC frequency as V<sub>DD</sub> changes.

**FIGURE 31-3: I/O TIMING CHARACTERISTICS**

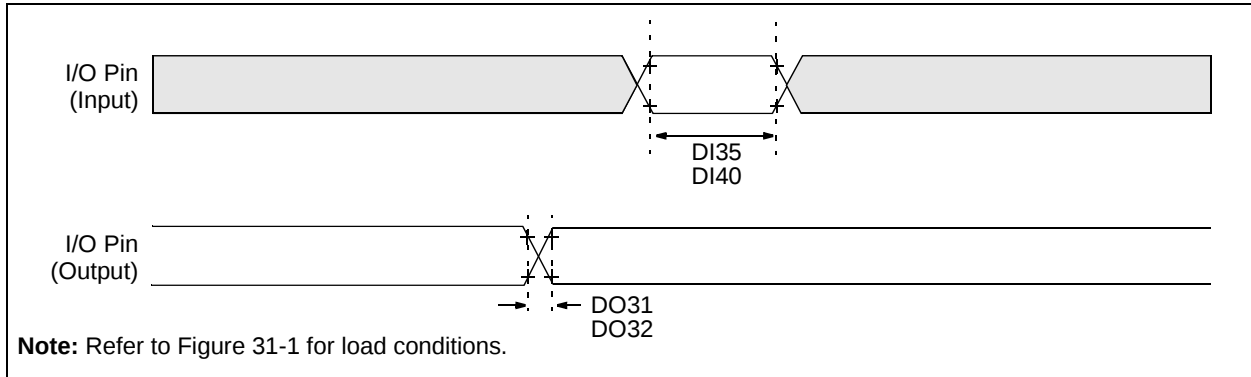

**TABLE 31-21: I/O TIMING REQUIREMENTS**

| AC CHARACTERISTICS |        | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |                        |      |         |            |
|--------------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------------------|------|---------|------------|
| Param. No.         | Symbol | Characteristics <sup>(2)</sup>                                                                                                                                           | Min. | Typical <sup>(1)</sup> | Max. | Units   | Conditions |
| DO31               | TioR   | Port Output Rise Time                                                                                                                                                    | —    | 5                      | 10   | ns      |            |
| DO32               | TioF   | Port Output Fall Time                                                                                                                                                    | —    | 5                      | 10   | ns      |            |
| DI35               | TINP   | INTx Pin High or Low Time                                                                                                                                                | 10   | —                      | —    | ns      |            |
| DI40               | TRBP   | CNx High or Low Time (input)                                                                                                                                             | 2    | —                      | —    | TSYSCLK |            |

**Note 1:** Data in “Typical” column is at 3.3V, 25°C unless otherwise stated.


**Note 2:** This parameter is characterized, but not tested in manufacturing.

# PIC32MX5XX/6XX/7XX

**FIGURE 31-4: POWER-ON RESET TIMING CHARACTERISTICS**


**Internal Voltage Regulator Enabled**

**Clock Sources = (FRC, FRCDIV, FRCDIV16, FRCPLL, EC, ECPLL and LPRC)**

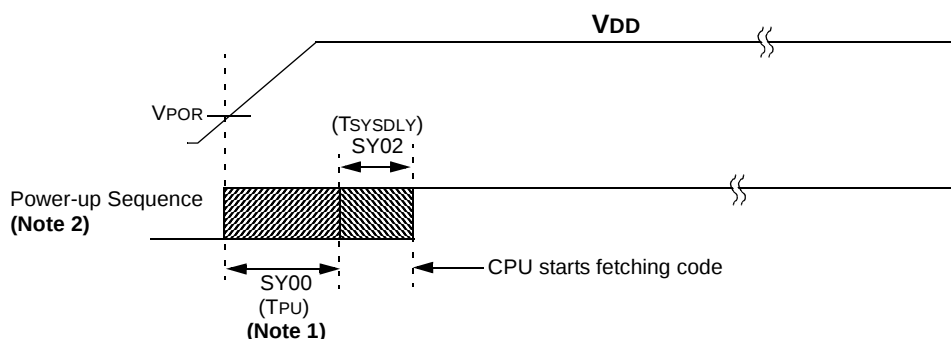


**Internal Voltage Regulator Enabled**

**Clock Sources = (HS, HSPLL, XT, XTPLL and Sosc)**

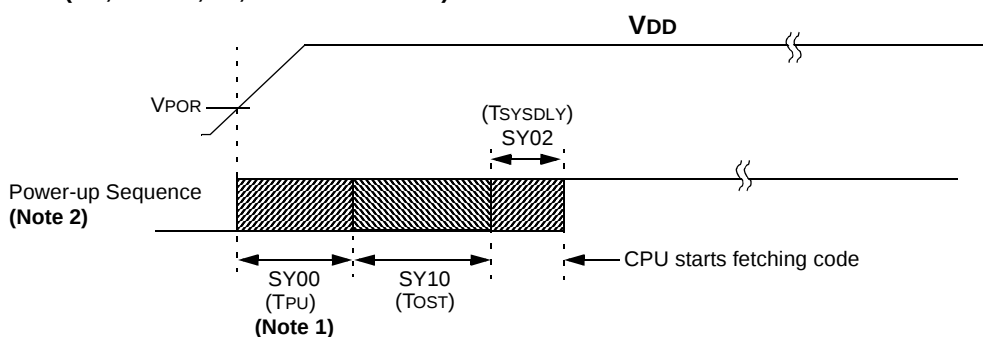

**External VDDCORE Provided**

**Clock Sources = (FRC, FRCDIV, FRCDIV16, FRCPLL, EC, ECPLL and LPRC)**

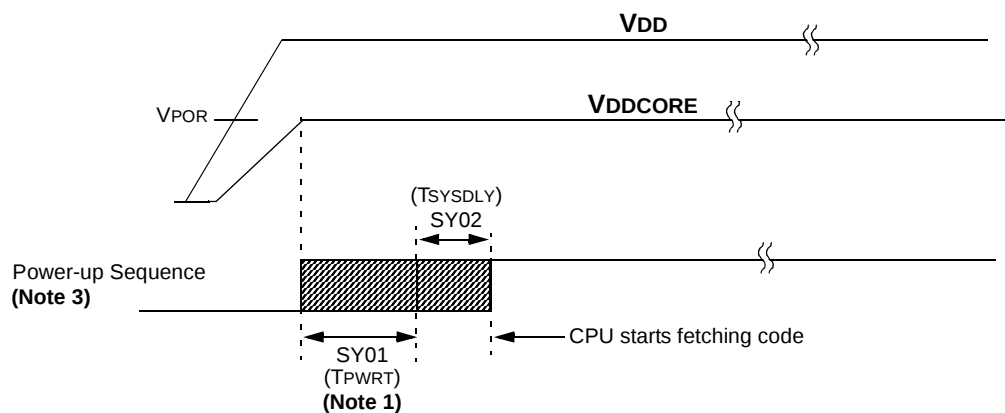


**Note 1:** The power-up period will be extended if the power-up sequence completes before the device exits from BOR ( $V_{DD} < V_{DDMIN}$ ).

**2:** Includes interval voltage regulator stabilization delay.

**3:** Power-Up Timer (PWRT); only active when the internal voltage regulator is disabled.

**FIGURE 31-5: EXTERNAL RESET TIMING CHARACTERISTICS**

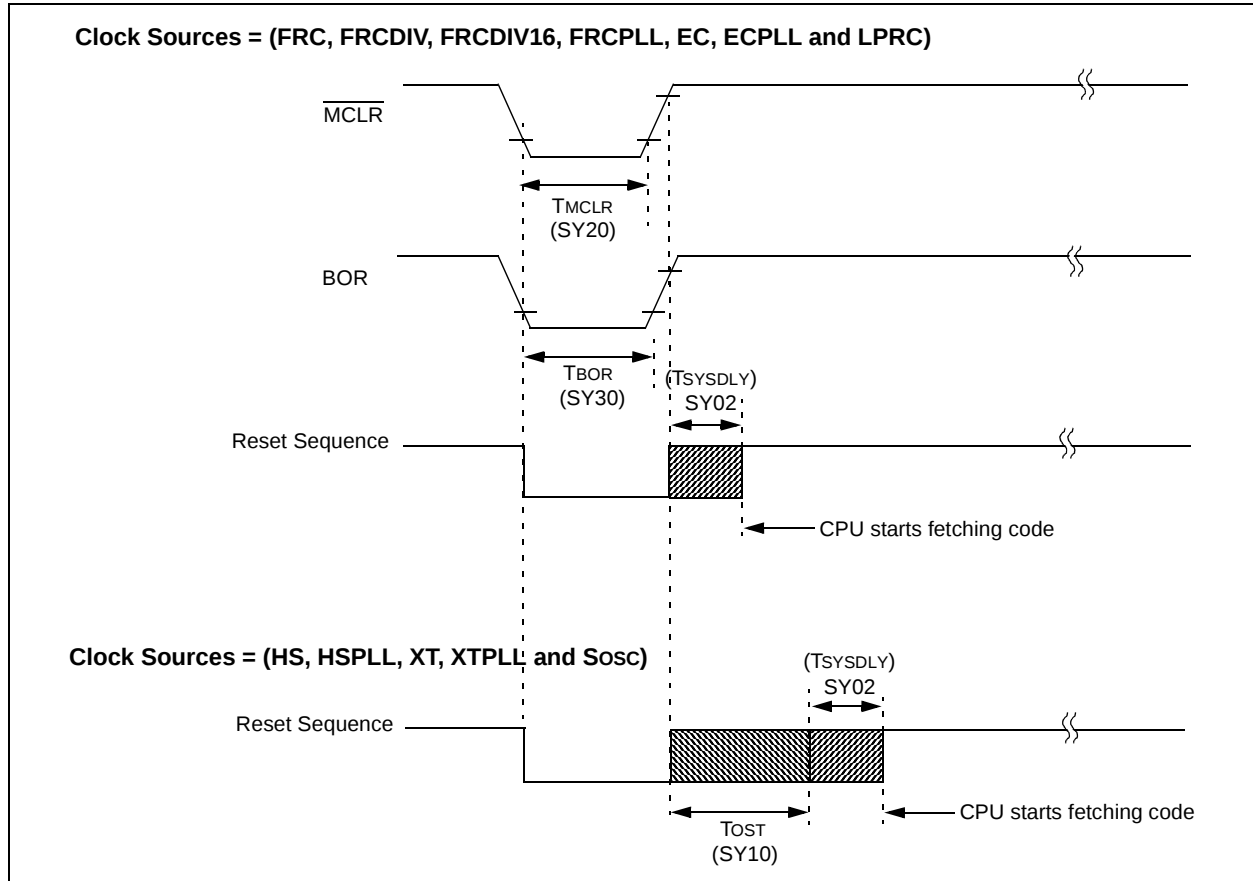

**TABLE 31-22: RESETS TIMING**


| AC CHARACTERISTICS |         |                                                                                                                                            | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                                            |      |               |                                                |
|--------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------|---------------|------------------------------------------------|
| Param. No.         | Symbol  | Characteristics <sup>(1)</sup>                                                                                                             | Min.                                                                                                                                                                     | Typical <sup>(2)</sup>                     | Max. | Units         | Conditions                                     |
| SY00               | TPU     | Power-up Period<br>Internal Voltage Regulator Enabled                                                                                      | —                                                                                                                                                                        | 400                                        | 600  | $\mu\text{s}$ | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ |
| SY01               | TPWRT   | Power-up Period<br>External VDDCORE Applied<br>(Power-Up-Timer Active)                                                                     | 48                                                                                                                                                                       | 64                                         | 80   | ms            | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ |
| SY02               | TSYSDLY | System Delay Period:<br>Time required to reload Device<br>Configuration Fuses plus SYSCLK<br>delay before first instruction is<br>fetched. | —                                                                                                                                                                        | 1 $\mu\text{s}$<br>+<br>8 SYSCLK<br>cycles | —    | —             | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ |
| SY20               | TMCLR   | MCLR Pulse Width (low)                                                                                                                     | —                                                                                                                                                                        | 2                                          | —    | $\mu\text{s}$ | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ |
| SY30               | TBOR    | BOR Pulse Width (low)                                                                                                                      | —                                                                                                                                                                        | 1                                          | —    | $\mu\text{s}$ | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ |

**Note 1:** These parameters are characterized, but not tested in manufacturing.

**2:** Data in "Typ" column is at 3.3V, 25°C unless otherwise stated. Characterized by design but not tested.

# PIC32MX5XX/6XX/7XX

**FIGURE 31-6: TIMER1, 2, 3, 4, 5 EXTERNAL CLOCK TIMING CHARACTERISTICS**

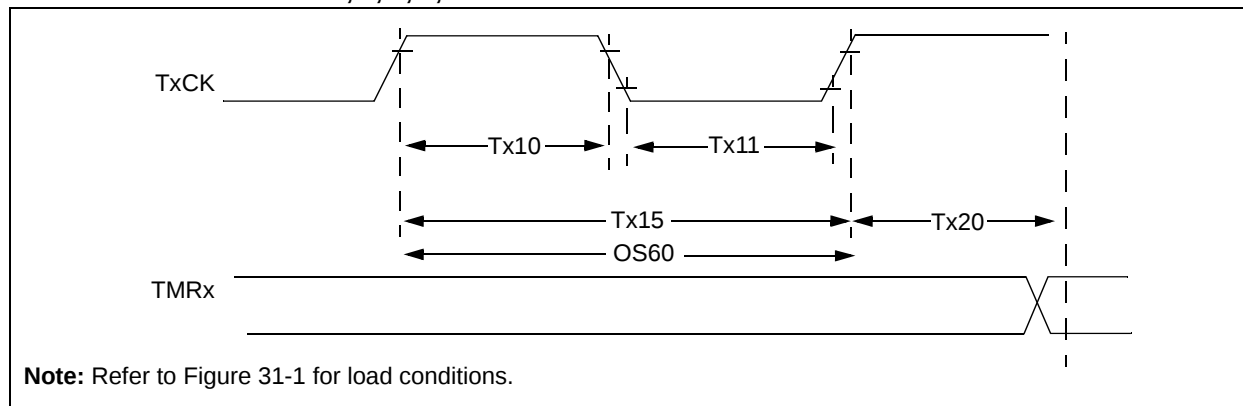

**TABLE 31-23: TIMER1 EXTERNAL CLOCK TIMING REQUIREMENTS<sup>(1)</sup>**

| AC CHARACTERISTICS |            |                                                                                                |                              | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |         |      |       |                                    |
|--------------------|------------|------------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|-------|------------------------------------|
| Param. No.         | Symbol     | Characteristics <sup>(2)</sup>                                                                 |                              | Min.                                                                                                                                                                     | Typical | Max. | Units | Conditions                         |
| TA10               | TtXH       | TxCK High Time                                                                                 | Synchronous, with prescaler  | $[(12.5 \text{ ns or } 1T_{PB}) / N] + 25 \text{ ns}$                                                                                                                    | —       | —    | ns    | Must also meet parameter TA15.     |
|                    |            |                                                                                                | Asynchronous, with prescaler | 10                                                                                                                                                                       | —       | —    | ns    |                                    |
| TA11               | TtXL       | TxCK Low Time                                                                                  | Synchronous, with prescaler  | $[(12.5 \text{ ns or } 1T_{PB}) / N] + 25 \text{ ns}$                                                                                                                    | —       | —    | ns    | Must also meet parameter TA15.     |
|                    |            |                                                                                                | Asynchronous, with prescaler | 10                                                                                                                                                                       | —       | —    | ns    |                                    |
| TA15               | TtXP       | TxCK Input Period                                                                              | Synchronous, with prescaler  | $[(25 \text{ ns or } 2T_{PB}) / N] + 50 \text{ ns}$                                                                                                                      | —       | —    | ns    |                                    |
|                    |            |                                                                                                | Asynchronous, with prescaler | 20                                                                                                                                                                       | —       | —    | ns    | N = prescale value (1, 8, 64, 256) |
| OS60               | Ft1        | SOSC1/T1CK Oscillator Input Frequency Range (oscillator enabled by setting TCS bit (T1CON<1>)) |                              | 32                                                                                                                                                                       | —       | 100  | kHz   |                                    |
| TA20               | TCKEXT-MRL | Delay from External TxCK Clock Edge to Timer Increment                                         |                              | —                                                                                                                                                                        |         | 1    | TPB   |                                    |

**Note 1:** Timer1 is a Type A.

**2:** This parameter is characterized, but not tested in manufacturing.


# PIC32MX5XX/6XX/7XX

**TABLE 31-24: TIMER2, 3, 4, 5 EXTERNAL CLOCK TIMING REQUIREMENTS**

| AC CHARACTERISTICS |            |                                                        |                             | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |       |                                                                                    |
|--------------------|------------|--------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------------------------------------------------------------------------------|
| Param. No.         | Symbol     | Characteristics <sup>(1)</sup>                         |                             | Min.                                                                                                                                                                     | Max. | Units | Conditions                                                                         |
| TB10               | TtXH       | TxCK High Time                                         | Synchronous, with prescaler | $[(12.5 \text{ ns or } 1\text{TPB}) / N] + 25 \text{ ns}$                                                                                                                | —    | ns    | Must also meet parameter TB15.<br>N = prescale value (1, 2, 4, 8, 16, 32, 64, 256) |
| TB11               | TtXL       | TxCK Low Time                                          | Synchronous, with prescaler | $[(12.5 \text{ ns or } 1\text{TPB}) / N] + 25 \text{ ns}$                                                                                                                | —    | ns    |                                                                                    |
| TB15               | TtXP       | TxCK Input Period                                      | Synchronous, with prescaler | $[(25 \text{ ns or } 2\text{TPB}) / N] + 50 \text{ ns}$                                                                                                                  | —    | ns    |                                                                                    |
| TB20               | TCKEXT-MRL | Delay from External TxCK Clock Edge to Timer Increment |                             | —                                                                                                                                                                        | 1    | TPB   |                                                                                    |

**Note 1:** These parameters are characterized, but not tested in manufacturing.

**FIGURE 31-7: INPUT CAPTURE (CAPx) TIMING CHARACTERISTICS**

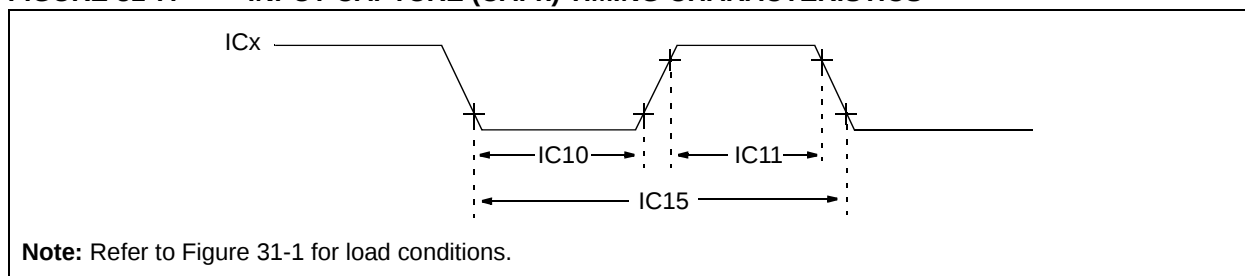

**TABLE 31-25: INPUT CAPTURE MODULE TIMING REQUIREMENTS**

| AC CHARACTERISTICS |        |                                |  | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |       |                                                                 |
|--------------------|--------|--------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|-----------------------------------------------------------------|
| Param. No.         | Symbol | Characteristics <sup>(1)</sup> |  | Min.                                                                                                                                                                     | Max. | Units | Conditions                                                      |
| IC10               | TcCL   | ICx Input Low Time             |  | $[(12.5 \text{ ns or } 1\text{TPB}) / N] + 25 \text{ ns}$                                                                                                                | —    | ns    | Must also meet parameter IC15.<br>N = prescale value (1, 4, 16) |
| IC11               | TcCH   | ICx Input High Time            |  | $[(12.5 \text{ ns or } 1\text{TPB}) / N] + 25 \text{ ns}$                                                                                                                | —    | ns    |                                                                 |
| IC15               | TcCP   | ICx Input Period               |  | $[(25 \text{ ns or } 2\text{TPB}) / N] + 50 \text{ ns}$                                                                                                                  | —    | ns    |                                                                 |

**Note 1:** These parameters are characterized, but not tested in manufacturing.

\_\_\_\_\_

**Note:** Refer to Figure 31-1 for load conditions.

| AC CHARACTERISTICS |        |                                | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |                        |      |       |                     |
|--------------------|--------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|-------|---------------------|
| Param. No.         | Symbol | Characteristics <sup>(1)</sup> | Min.                                                                                                                                | Typical <sup>(2)</sup> | Max. | Units | Conditions          |
| OC10               | TccF   | OCx Output Fall Time           | —                                                                                                                                   | —                      | —    | ns    | See parameter DO32. |
| OC11               | TccR   | OCx Output Rise Time           | —                                                                                                                                   | —                      | —    | ns    | See parameter DO31. |


2: Data in "Typical" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

The diagram shows the timing relationship between the OCFA/OCFB signal and the OCx signals. The OCFA/OCFB signal is an active-low pulse. The OCx signals are complementary square waves. The OC20 period is indicated by a double-headed arrow from the first vertical dashed line to the third. The OC15 period is indicated by a double-headed arrow from the first vertical dashed line to the second. The OCFA/OCFB signal transitions from high to low at the first vertical dashed line and returns to high at the third vertical dashed line. The OCx signals cross at the second vertical dashed line.

| AC CHARACTERISTICS |                  |                                | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                        |     |       |            |
|--------------------|------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-----|-------|------------|
| Param No.          | Symbol           | Characteristics <sup>(1)</sup> | Min                                                                                                                                                                      | Typical <sup>(2)</sup> | Max | Units | Conditions |
| OC15               | T <sub>FD</sub>  | Fault Input to PWM I/O Change  | —                                                                                                                                                                        | —                      | 50  | ns    |            |
| OC20               | T <sub>FLT</sub> | Fault Input Pulse Width        | 50                                                                                                                                                                       | —                      | —   | ns    |            |

2: Data in "Typical" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**FIGURE 31-10: SPIx MODULE MASTER MODE (CKE = 0) TIMING CHARACTERISTICS**

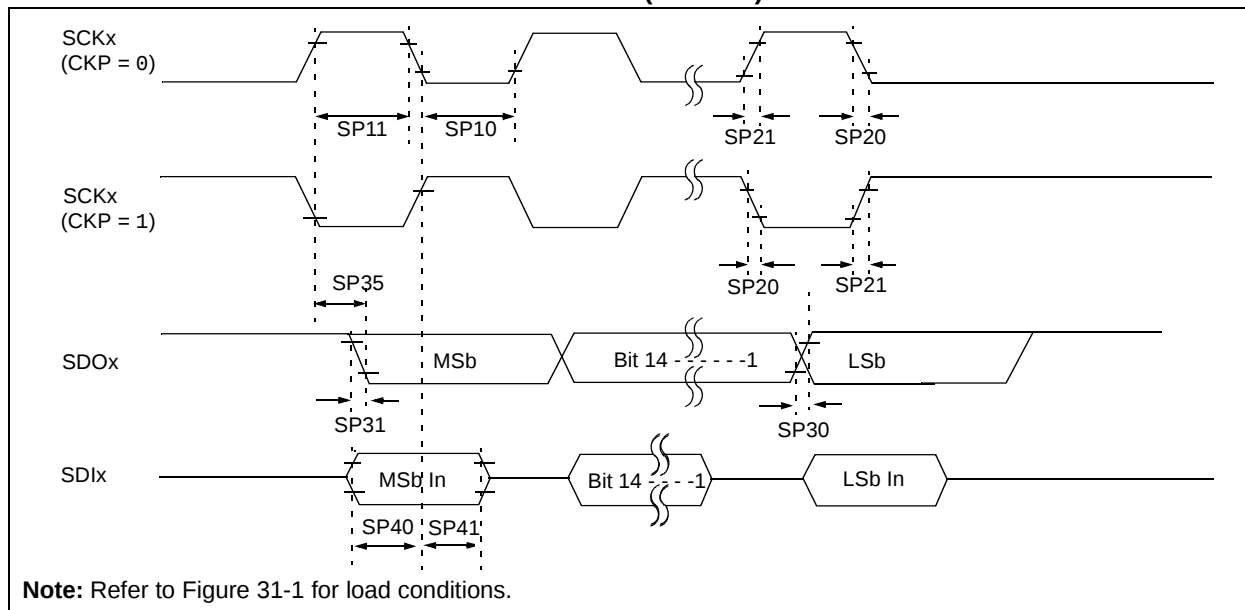

**TABLE 31-28: SPIx MASTER MODE (CKE = 0) TIMING REQUIREMENTS**

| AC CHARACTERISTICS |                       |                                               | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |                        |      |       |                     |
|--------------------|-----------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|-------|---------------------|
| Param. No.         | Symbol                | Characteristics <sup>(1)</sup>                | Min.                                                                                                                                | Typical <sup>(2)</sup> | Max. | Units | Conditions          |
| SP10               | TsCL                  | SCKx Output Low Time<br>(Note 3)              | Tsck/2                                                                                                                              | —                      | —    | ns    |                     |
| SP11               | TsCH                  | SCKx Output High Time<br>(Note 3)             | Tsck/2                                                                                                                              | —                      | —    | ns    |                     |
| SP20               | TscF                  | SCKx Output Fall Time<br>(Note 4)             | —                                                                                                                                   | —                      | —    | ns    | See parameter DO32. |
| SP21               | TscR                  | SCKx Output Rise Time<br>(Note 4)             | —                                                                                                                                   | —                      | —    | ns    | See parameter DO31. |
| SP30               | TdoF                  | SDOx Data Output Fall Time<br>(Note 4)        | —                                                                                                                                   | —                      | —    | ns    | See parameter DO32. |
| SP31               | TdoR                  | SDOx Data Output Rise Time<br>(Note 4)        | —                                                                                                                                   | —                      | —    | ns    | See parameter DO31. |
| SP35               | Tsch2doV,<br>Tscl2doV | SDOx Data Output Valid after<br>SCKx Edge     | —                                                                                                                                   | —                      | 15   | ns    |                     |
| SP40               | TdiV2sch,<br>TdiV2scl | Setup Time of SDIx Data Input<br>to SCKx Edge | 10                                                                                                                                  | —                      | —    | ns    |                     |
| SP41               | Tsch2diL,<br>Tscl2diL | Hold Time of SDIx Data Input<br>to SCKx Edge  | 10                                                                                                                                  | —                      | —    | ns    |                     |

**Note 1:** These parameters are characterized, but not tested in manufacturing.


**2:** Data in "Typical" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**3:** The minimum clock period for SCKx is 40 ns. Therefore, the clock generated in Master mode must not violate this specification.

**4:** Assumes 50 pF load on all SPIx pins.

# PIC32MX5XX/6XX/7XX

**FIGURE 31-11: SPIx MODULE MASTER MODE (CKE = 1) TIMING CHARACTERISTICS**

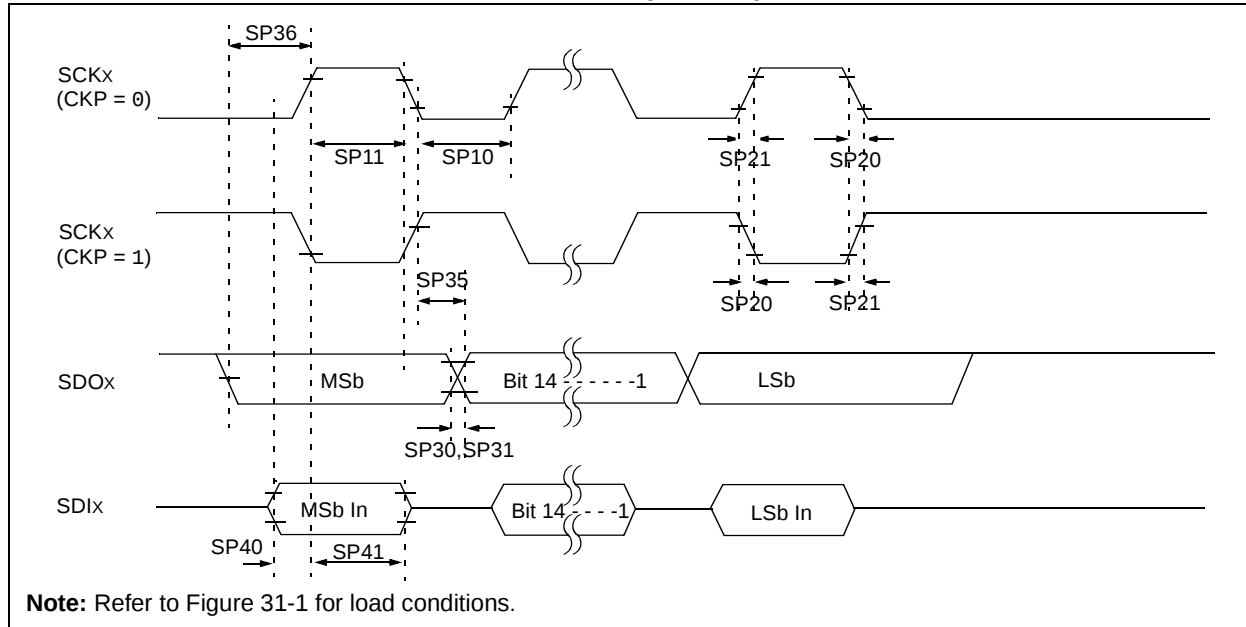

**TABLE 31-29: SPIx MODULE MASTER MODE (CKE = 1) TIMING REQUIREMENTS**

| AC CHARACTERISTICS |                    |                                              | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                     |      |       |                     |
|--------------------|--------------------|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|-------|---------------------|
| Param. No.         | Symbol             | Characteristics <sup>(1)</sup>               | Min.                                                                                                                                                                     | Typ. <sup>(2)</sup> | Max. | Units | Conditions          |
| SP10               | TsCL               | SCKx Output Low Time ( <b>Note 3</b> )       | $T_{\text{SCK}}/2$                                                                                                                                                       | —                   | —    | ns    |                     |
| SP11               | TsCH               | SCKx Output High Time ( <b>Note 3</b> )      | $T_{\text{SCK}}/2$                                                                                                                                                       | —                   | —    | ns    |                     |
| SP20               | TsCF               | SCKx Output Fall Time ( <b>Note 4</b> )      | —                                                                                                                                                                        | —                   | —    | ns    | See parameter DO32. |
| SP21               | TsCR               | SCKx Output Rise Time ( <b>Note 4</b> )      | —                                                                                                                                                                        | —                   | —    | ns    | See parameter DO31. |
| SP30               | TdOF               | SDOx Data Output Fall Time ( <b>Note 4</b> ) | —                                                                                                                                                                        | —                   | —    | ns    | See parameter DO32. |
| SP31               | TdOR               | SDOx Data Output Rise Time ( <b>Note 4</b> ) | —                                                                                                                                                                        | —                   | —    | ns    | See parameter DO31. |
| SP35               | TsCH2dOV, TsCL2dOV | SDOx Data Output Valid after SCKx Edge       | —                                                                                                                                                                        | —                   | 15   | ns    |                     |
| SP36               | TdOV2sc, TdOV2scL  | SDOx Data Output Setup to First SCKx Edge    | 15                                                                                                                                                                       | —                   | —    | ns    |                     |
| SP40               | TdIV2sch, TdIV2scL | Setup Time of SDIx Data Input to SCKx Edge   | 10                                                                                                                                                                       | —                   | —    | ns    |                     |
| SP41               | TsCH2dIL, TsCL2dIL | Hold Time of SDIx Data Input to SCKx Edge    | 10                                                                                                                                                                       | —                   | —    | ns    |                     |


**Note 1:** These parameters are characterized, but not tested in manufacturing.

**Note 2:** Data in "Typical" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**Note 3:** The minimum clock period for SCKx is 40 ns. Therefore, the clock generated in Master mode must not violate this specification.

**Note 4:** Assumes 50 pF load on all SPIx pins.

**FIGURE 31-12: SPIx MODULE SLAVE MODE (CKE = 0) TIMING CHARACTERISTICS**

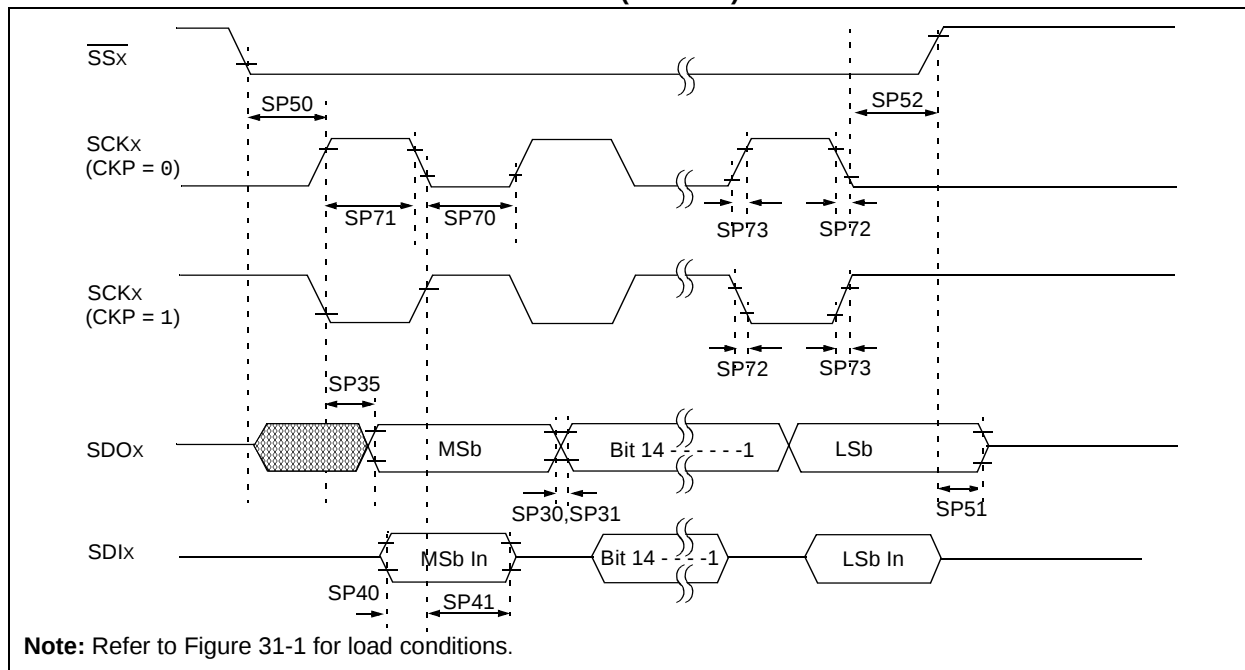

**TABLE 31-30: SPIx MODULE SLAVE MODE (CKE = 0) TIMING REQUIREMENTS**

| AC CHARACTERISTICS |                       |                                                                         |                       | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |       |                     |
|--------------------|-----------------------|-------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|---------------------|
| Param. No.         | Symbol                | Characteristics <sup>(1)</sup>                                          | Min.                  | Typ. <sup>(2)</sup>                                                                                                                                                      | Max. | Units | Conditions          |
| SP70               | TscL                  | SCKx Input Low Time (Note 3)                                            | $T_{\text{SCK}}/2$    | —                                                                                                                                                                        | —    | ns    |                     |
| SP71               | TscH                  | SCKx Input High Time (Note 3)                                           | $T_{\text{SCK}}/2$    | —                                                                                                                                                                        | —    | ns    |                     |
| SP72               | TscF                  | SCKx Input Fall Time                                                    | —                     | 5                                                                                                                                                                        | 10   | ns    |                     |
| SP73               | TscR                  | SCKx Input Rise Time                                                    | —                     | 5                                                                                                                                                                        | 10   | ns    |                     |
| SP30               | TdoF                  | SDOx Data Output Fall Time (Note 4)                                     | —                     | —                                                                                                                                                                        | —    | ns    | See parameter DO32. |
| SP31               | TdoR                  | SDOx Data Output Rise Time (Note 4)                                     | —                     | —                                                                                                                                                                        | —    | ns    | See parameter DO31. |
| SP35               | Tsch2doV,<br>TscL2doV | SDOx Data Output Valid after SCKx Edge                                  | —                     | —                                                                                                                                                                        | 15   | ns    |                     |
| SP40               | TdIV2sch,<br>TdIV2scL | Setup Time of SDIx Data Input to SCKx Edge                              | 10                    | —                                                                                                                                                                        | —    | ns    |                     |
| SP41               | Tsch2diL,<br>TscL2diL | Hold Time of SDIx Data Input to SCKx Edge                               | 10                    | —                                                                                                                                                                        | —    | ns    |                     |
| SP50               | TssL2sch,<br>TssL2scL | $\overline{\text{SSx}} \downarrow$ to SCKx $\uparrow$ or SCKx Input     | 60                    | —                                                                                                                                                                        | —    | ns    |                     |
| SP51               | TssH2doZ              | $\overline{\text{SSx}} \uparrow$ to SDOx Output High-Impedance (Note 3) | 5                     | —                                                                                                                                                                        | 25   | ns    |                     |
| SP52               | Tsch2ssH,<br>TscL2ssH | $\overline{\text{SSx}}$ after SCKx Edge                                 | $T_{\text{SCK}} + 20$ | —                                                                                                                                                                        | —    | ns    | —                   |

**Note 1:** These parameters are characterized, but not tested in manufacturing.


**2:** Data in "Typical" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**3:** The minimum clock period for SCKx is 40 ns.

**4:** Assumes 50 pF load on all SPIx pins.

# PIC32MX5XX/6XX/7XX

**FIGURE 31-13: SPIx MODULE SLAVE MODE (CKE = 1) TIMING CHARACTERISTICS**

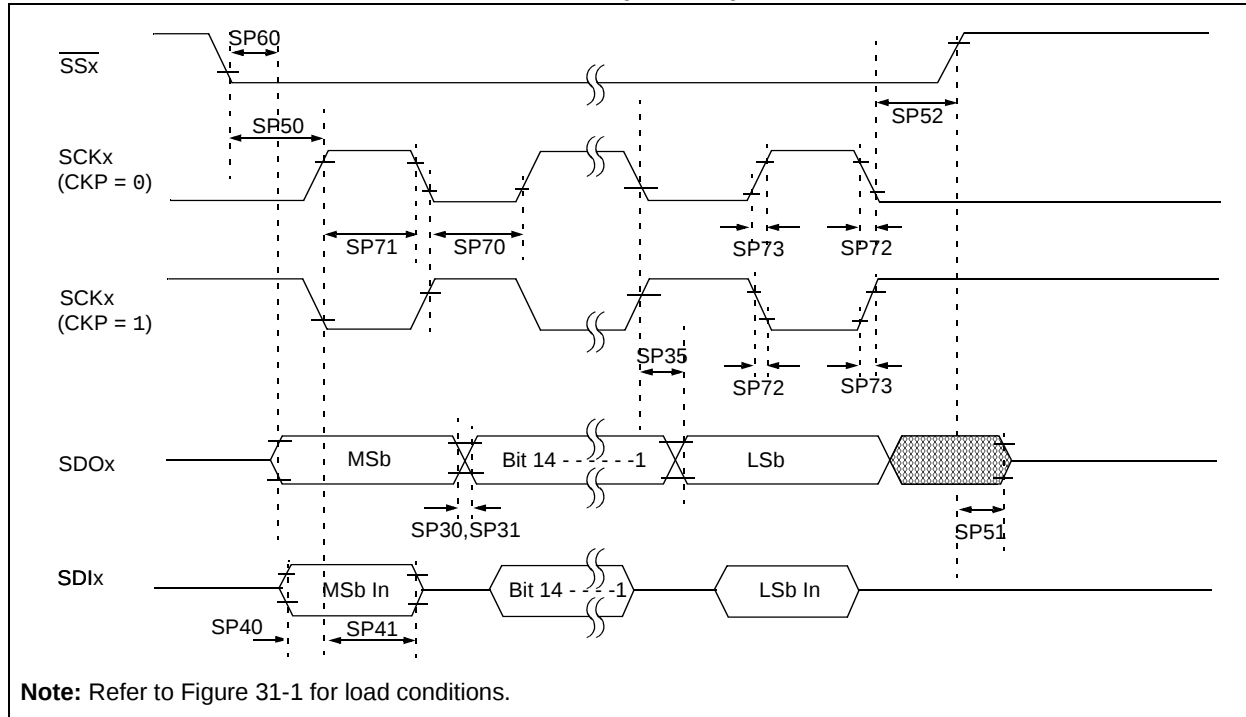

**TABLE 31-31: SPIx MODULE SLAVE MODE (CKE = 1) TIMING REQUIREMENTS**

| AC CHARACTERISTICS |                       |                                               | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                        |      |       |                     |
|--------------------|-----------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|-------|---------------------|
| Param. No.         | Symbol                | Characteristics <sup>(1)</sup>                | Min.                                                                                                                                                                     | Typical <sup>(2)</sup> | Max. | Units | Conditions          |
| SP70               | TsCL                  | SCKx Input Low Time<br>(Note 3)               | $T_{\text{SCK}}/2$                                                                                                                                                       | —                      | —    | ns    |                     |
| SP71               | TsCH                  | SCKx Input High Time<br>(Note 3)              | $T_{\text{SCK}}/2$                                                                                                                                                       | —                      | —    | ns    |                     |
| SP72               | TscF                  | SCKx Input Fall Time                          | —                                                                                                                                                                        | 5                      | 10   | ns    |                     |
| SP73               | TscR                  | SCKx Input Rise Time                          | —                                                                                                                                                                        | 5                      | 10   | ns    |                     |
| SP30               | TdOF                  | SDOx Data Output Fall Time<br>(Note 4)        | —                                                                                                                                                                        | —                      | —    | ns    | See parameter DO32. |
| SP31               | TdOR                  | SDOx Data Output Rise Time<br>(Note 4)        | —                                                                                                                                                                        | —                      | —    | ns    | See parameter DO31. |
| SP35               | TsCH2dOV,<br>TsCL2dOV | SDOx Data Output Valid after<br>SCKx Edge     | —                                                                                                                                                                        | —                      | 15   | ns    |                     |
| SP40               | TdIV2sCH,<br>TdIV2sCL | Setup Time of SDIx Data Input<br>to SCKx Edge | 10                                                                                                                                                                       | —                      | —    | ns    |                     |
| SP41               | TsCH2dIL,<br>TsCL2dIL | Hold Time of SDIx Data Input<br>to SCKx Edge  | 10                                                                                                                                                                       | —                      | —    | ns    |                     |

**Note 1:** These parameters are characterized, but not tested in manufacturing.

**2:** Data in "Typical" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**3:** The minimum clock period for SCKx is 40 ns.

**4:** Assumes 50 pF load on all SPIx pins.


**TABLE 31-31: SPIx MODULE SLAVE MODE (CKE = 1) TIMING REQUIREMENTS (CONTINUED)**

| AC CHARACTERISTICS |                    |                                                                                   | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                        |      |       |            |
|--------------------|--------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|-------|------------|
| Param. No.         | Symbol             | Characteristics <sup>(1)</sup>                                                    | Min.                                                                                                                                                                     | Typical <sup>(2)</sup> | Max. | Units | Conditions |
| SP50               | TssL2sCH, TssL2sCL | $\overline{\text{SS}}_x \downarrow$ to SCKx $\downarrow$ or SCKx $\uparrow$ Input | 60                                                                                                                                                                       | —                      | —    | ns    |            |
| SP51               | TssH2doZ           | $\overline{\text{SS}}_x \uparrow$ to SDOx Output High-Impedance (Note 4)          | 5                                                                                                                                                                        | —                      | 25   | ns    |            |
| SP52               | Tsch2ssH TscL2ssH  | $\overline{\text{SS}}_x \uparrow$ after SCKx Edge                                 | Tsck + 20                                                                                                                                                                | —                      | —    | ns    |            |
| SP60               | TssL2doV           | SDOx Data Output Valid after $\overline{\text{SS}}_x$ Edge                        | —                                                                                                                                                                        | —                      | 25   | ns    |            |


- Note 1:** These parameters are characterized, but not tested in manufacturing.
- 2:** Data in "Typical" column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.
- 3:** The minimum clock period for SCKx is 40 ns.
- 4:** Assumes 50 pF load on all SPIx pins.

# PIC32MX5XX/6XX/7XX

**FIGURE 31-14: I2Cx BUS START/STOP BITS TIMING CHARACTERISTICS (MASTER MODE)**

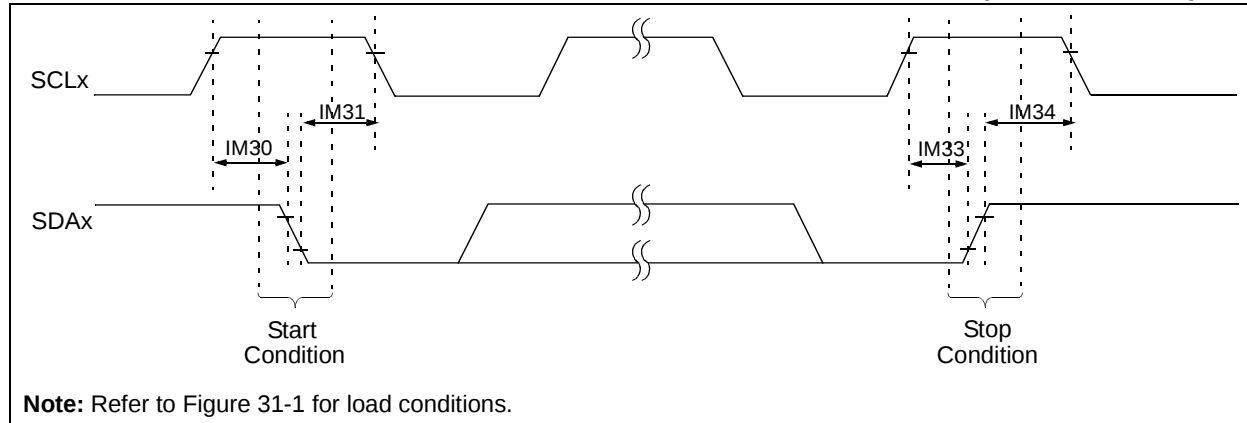

**FIGURE 31-15: I2Cx BUS DATA TIMING CHARACTERISTICS (MASTER MODE)**

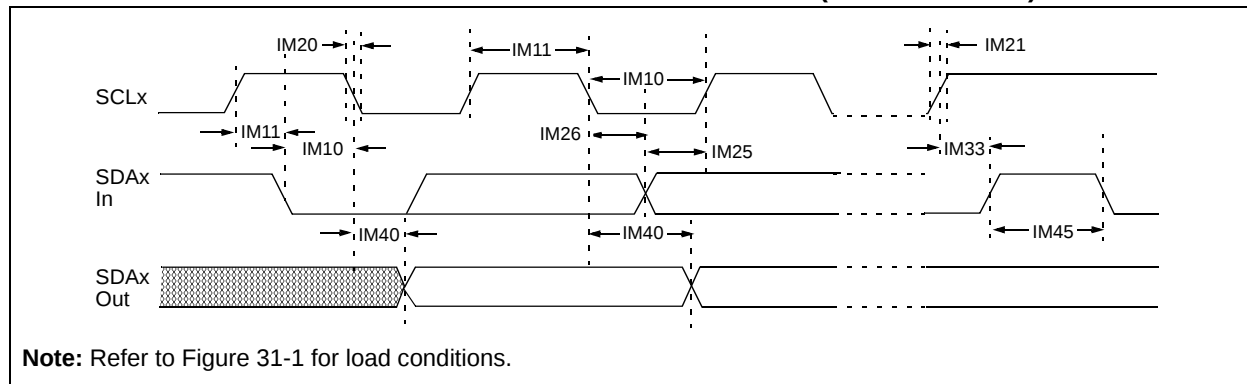

**TABLE 31-32: I2Cx BUS DATA TIMING REQUIREMENTS (MASTER MODE)**

| AC CHARACTERISTICS |         |                               |                        | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |               |                                                              |
|--------------------|---------|-------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------------|--------------------------------------------------------------|
| Param. No.         | Symbol  | Characteristics               |                        | Min. <sup>(1)</sup>                                                                                                                                                      | Max. | Units         | Conditions                                                   |
| IM10               | TLO:SCL | Clock Low Time                | 100 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ | —                                                            |
|                    |         |                               | 400 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ | —                                                            |
|                    |         |                               | 1 MHz mode<br>(Note 2) | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ | —                                                            |
| IM11               | THI:SCL | Clock High Time               | 100 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ | —                                                            |
|                    |         |                               | 400 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ | —                                                            |
|                    |         |                               | 1 MHz mode<br>(Note 2) | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ | —                                                            |
| IM20               | TF:SCL  | SDAx and SCLx<br>Fall Time    | 100 kHz mode           | —                                                                                                                                                                        | 300  | ns            | Cb is specified to be<br>from 10 to 400 pF.                  |
|                    |         |                               | 400 kHz mode           | $20 + 0.1 C_b$                                                                                                                                                           | 300  | ns            |                                                              |
|                    |         |                               | 1 MHz mode<br>(Note 2) | —                                                                                                                                                                        | 100  | ns            |                                                              |
| IM21               | TR:SCL  | SDAx and SCLx<br>Rise Time    | 100 kHz mode           | —                                                                                                                                                                        | 1000 | ns            | Cb is specified to be<br>from 10 to 400 pF.                  |
|                    |         |                               | 400 kHz mode           | $20 + 0.1 C_b$                                                                                                                                                           | 300  | ns            |                                                              |
|                    |         |                               | 1 MHz mode<br>(Note 2) | —                                                                                                                                                                        | 300  | ns            |                                                              |
| IM25               | TSU:DAT | Data Input<br>Setup Time      | 100 kHz mode           | 250                                                                                                                                                                      | —    | ns            | —                                                            |
|                    |         |                               | 400 kHz mode           | 100                                                                                                                                                                      | —    | ns            |                                                              |
|                    |         |                               | 1 MHz mode<br>(Note 2) | 100                                                                                                                                                                      | —    | ns            |                                                              |
| IM26               | THD:DAT | Data Input<br>Hold Time       | 100 kHz mode           | 0                                                                                                                                                                        | —    | $\mu\text{S}$ | —                                                            |
|                    |         |                               | 400 kHz mode           | 0                                                                                                                                                                        | 0.9  | $\mu\text{S}$ |                                                              |
|                    |         |                               | 1 MHz mode<br>(Note 2) | 0                                                                                                                                                                        | 0.3  | $\mu\text{S}$ |                                                              |
| IM30               | TSU:STA | Start Condition<br>Setup Time | 100 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ | Only relevant for<br>Repeated Start<br>condition.            |
|                    |         |                               | 400 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ |                                                              |
|                    |         |                               | 1 MHz mode<br>(Note 2) | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ |                                                              |
| IM31               | THD:STA | Start Condition<br>Hold Time  | 100 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ | After this period, the<br>first clock pulse is<br>generated. |
|                    |         |                               | 400 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ |                                                              |
|                    |         |                               | 1 MHz mode<br>(Note 2) | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ |                                                              |
| IM33               | TSU:STO | Stop Condition<br>Setup Time  | 100 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ | —                                                            |
|                    |         |                               | 400 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ |                                                              |
|                    |         |                               | 1 MHz mode<br>(Note 2) | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | $\mu\text{S}$ |                                                              |
| IM34               | THD:STO | Stop Condition<br>Hold Time   | 100 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | ns            | —                                                            |
|                    |         |                               | 400 kHz mode           | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | ns            |                                                              |
|                    |         |                               | 1 MHz mode<br>(Note 2) | $T_{PB} * (BRG + 2)$                                                                                                                                                     | —    | ns            |                                                              |

**Note 1:** BRG is the value of the I<sup>2</sup>C™ Baud Rate Generator.

**2:** Maximum pin capacitance = 10 pF for all I2Cx pins (for 1 MHz mode only).

# PIC32MX5XX/6XX/7XX


**TABLE 31-32: I2Cx BUS DATA TIMING REQUIREMENTS (MASTER MODE) (CONTINUED)**

| AC CHARACTERISTICS |         |                         |                        | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |      |       |                                                                              |
|--------------------|---------|-------------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------------------------------------------------------------------------|
| Param. No.         | Symbol  | Characteristics         |                        | Min. <sup>(1)</sup>                                                                                                                 | Max. | Units | Conditions                                                                   |
| IM40               | TAA:SCL | Output Valid From Clock | 100 kHz mode           | —                                                                                                                                   | 3500 | ns    | —                                                                            |
|                    |         |                         | 400 kHz mode           | —                                                                                                                                   | 1000 | ns    | —                                                                            |
|                    |         |                         | 1 MHz mode<br>(Note 2) | —                                                                                                                                   | 350  | ns    | —                                                                            |
| IM45               | TBF:SDA | Bus Free Time           | 100 kHz mode           | 4.7                                                                                                                                 | —    | μs    | The amount of time the bus must be free before a new transmission can start. |
|                    |         |                         | 400 kHz mode           | 1.3                                                                                                                                 | —    | μs    |                                                                              |
|                    |         |                         | 1 MHz mode<br>(Note 2) | 0.5                                                                                                                                 | —    | μs    |                                                                              |
| IM50               | CB      | Bus Capacitive Loading  |                        | —                                                                                                                                   | 400  | pF    |                                                                              |


**Note 1:** BRG is the value of the I<sup>2</sup>C™ Baud Rate Generator.

**Note 2:** Maximum pin capacitance = 10 pF for all I2Cx pins (for 1 MHz mode only).

**FIGURE 31-16: I2Cx BUS START/STOP BITS TIMING CHARACTERISTICS (SLAVE MODE)**

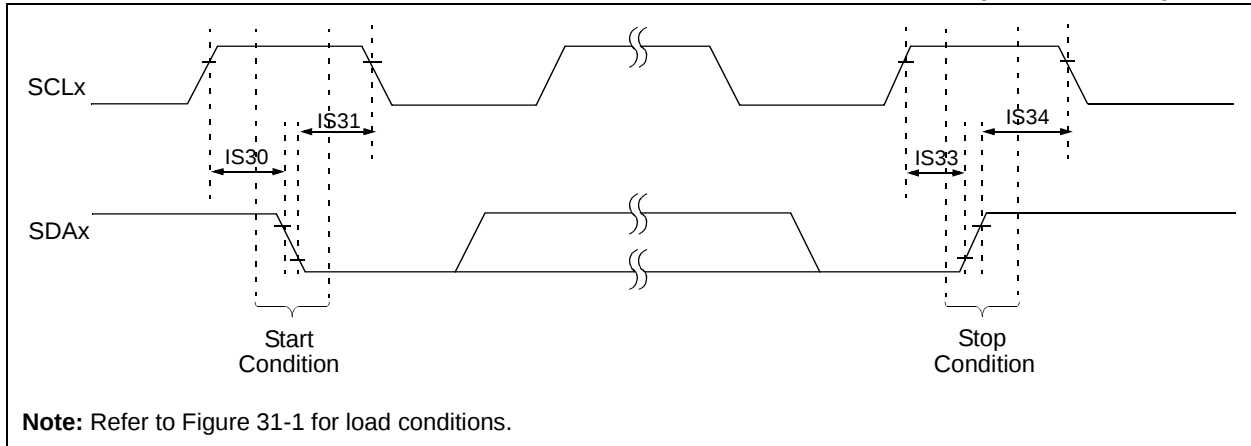

**FIGURE 31-17: I2Cx BUS DATA TIMING CHARACTERISTICS (SLAVE MODE)**

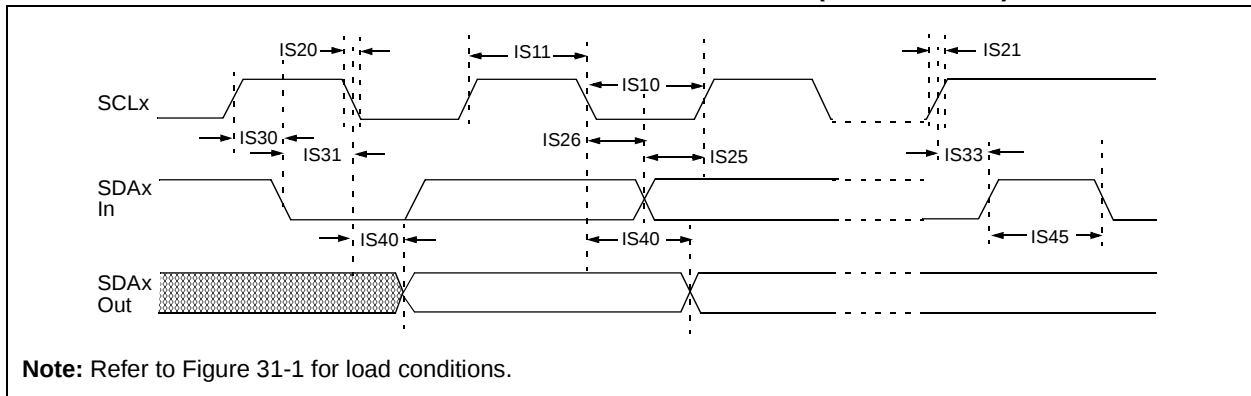

# PIC32MX5XX/6XX/7XX

**TABLE 31-33: I2Cx BUS DATA TIMING REQUIREMENTS (SLAVE MODE)**

| AC CHARACTERISTICS |         |                            |                        | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |               |                                                        |
|--------------------|---------|----------------------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------------|--------------------------------------------------------|
| Param. No.         | Symbol  | Characteristics            |                        | Min.                                                                                                                                                                     | Max. | Units         | Conditions                                             |
| IS10               | TLO:SCL | Clock Low Time             | 100 kHz mode           | 4.7                                                                                                                                                                      | —    | $\mu\text{s}$ | PBCLK must operate at a minimum of 800 kHz.            |
|                    |         |                            | 400 kHz mode           | 1.3                                                                                                                                                                      | —    | $\mu\text{s}$ | PBCLK must operate at a minimum of 3.2 MHz.            |
|                    |         |                            | 1 MHz mode<br>(Note 1) | 0.5                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                        |
| IS11               | THI:SCL | Clock High Time            | 100 kHz mode           | 4.0                                                                                                                                                                      | —    | $\mu\text{s}$ | PBCLK must operate at a minimum of 800 kHz.            |
|                    |         |                            | 400 kHz mode           | 0.6                                                                                                                                                                      | —    | $\mu\text{s}$ | PBCLK must operate at a minimum of 3.2 MHz.            |
|                    |         |                            | 1 MHz mode<br>(Note 1) | 0.5                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                        |
| IS20               | TF:SCL  | SDAx and SCLx Fall Time    | 100 kHz mode           | —                                                                                                                                                                        | 300  | ns            | Cb is specified to be from 10 to 400 pF.               |
|                    |         |                            | 400 kHz mode           | $20 + 0.1 C_B$                                                                                                                                                           | 300  | ns            |                                                        |
|                    |         |                            | 1 MHz mode<br>(Note 1) | —                                                                                                                                                                        | 100  | ns            |                                                        |
| IS21               | TR:SCL  | SDAx and SCLx Rise Time    | 100 kHz mode           | —                                                                                                                                                                        | 1000 | ns            | Cb is specified to be from 10 to 400 pF.               |
|                    |         |                            | 400 kHz mode           | $20 + 0.1 C_B$                                                                                                                                                           | 300  | ns            |                                                        |
|                    |         |                            | 1 MHz mode<br>(Note 1) | —                                                                                                                                                                        | 300  | ns            |                                                        |
| IS25               | TSU:DAT | Data Input Setup Time      | 100 kHz mode           | 250                                                                                                                                                                      | —    | ns            |                                                        |
|                    |         |                            | 400 kHz mode           | 100                                                                                                                                                                      | —    | ns            |                                                        |
|                    |         |                            | 1 MHz mode<br>(Note 1) | 100                                                                                                                                                                      | —    | ns            |                                                        |
| IS26               | THD:DAT | Data Input Hold Time       | 100 kHz mode           | 0                                                                                                                                                                        | —    | ns            |                                                        |
|                    |         |                            | 400 kHz mode           | 0                                                                                                                                                                        | 0.9  | $\mu\text{s}$ |                                                        |
|                    |         |                            | 1 MHz mode<br>(Note 1) | 0                                                                                                                                                                        | 0.3  | $\mu\text{s}$ |                                                        |
| IS30               | TSU:STA | Start Condition Setup Time | 100 kHz mode           | 4700                                                                                                                                                                     | —    | $\mu\text{s}$ | Only relevant for Repeated Start condition.            |
|                    |         |                            | 400 kHz mode           | 600                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                        |
|                    |         |                            | 1 MHz mode<br>(Note 1) | 250                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                        |
| IS31               | THD:STA | Start Condition Hold Time  | 100 kHz mode           | 4000                                                                                                                                                                     | —    | $\mu\text{s}$ | After this period, the first clock pulse is generated. |
|                    |         |                            | 400 kHz mode           | 600                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                        |
|                    |         |                            | 1 MHz mode<br>(Note 1) | 250                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                        |
| IS33               | TSU:STO | Stop Condition Setup Time  | 100 kHz mode           | 4000                                                                                                                                                                     | —    | $\mu\text{s}$ |                                                        |
|                    |         |                            | 400 kHz mode           | 600                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                        |
|                    |         |                            | 1 MHz mode<br>(Note 1) | 600                                                                                                                                                                      | —    | $\mu\text{s}$ |                                                        |

**Note 1:** Maximum pin capacitance = 10 pF for all I2Cx pins (for 1 MHz mode only).

**TABLE 31-33: I2Cx BUS DATA TIMING REQUIREMENTS (SLAVE MODE) (CONTINUED)**

| AC CHARACTERISTICS |         |                          |              | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |      |       |                                                                              |
|--------------------|---------|--------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------------------------------------------------------------------------|
| Param. No.         | Symbol  | Characteristics          |              | Min.                                                                                                                                | Max. | Units | Conditions                                                                   |
| IS34               | THD:STO | Stop Condition Hold Time | 100 kHz mode | 4000                                                                                                                                | —    | ns    |                                                                              |
|                    |         |                          | 400 kHz mode | 600                                                                                                                                 | —    | ns    |                                                                              |
|                    |         |                          | 1 MHz mode   | 250                                                                                                                                 |      | ns    |                                                                              |
|                    |         |                          | (Note 1)     |                                                                                                                                     |      |       |                                                                              |
| IS40               | TAA:SCL | Output Valid From Clock  | 100 kHz mode | 0                                                                                                                                   | 3500 | ns    |                                                                              |
|                    |         |                          | 400 kHz mode | 0                                                                                                                                   | 1000 | ns    |                                                                              |
|                    |         |                          | 1 MHz mode   | 0                                                                                                                                   | 350  | ns    |                                                                              |
|                    |         |                          | (Note 1)     |                                                                                                                                     |      |       |                                                                              |
| IS45               | TBF:SDA | Bus Free Time            | 100 kHz mode | 4.7                                                                                                                                 | —    | μs    | The amount of time the bus must be free before a new transmission can start. |
|                    |         |                          | 400 kHz mode | 1.3                                                                                                                                 | —    | μs    |                                                                              |
|                    |         |                          | 1 MHz mode   | 0.5                                                                                                                                 | —    | μs    |                                                                              |
|                    |         |                          | (Note 1)     |                                                                                                                                     |      |       |                                                                              |
| IS50               | Cb      | Bus Capacitive Loading   |              | —                                                                                                                                   | 400  | pF    |                                                                              |

**Note 1:** Maximum pin capacitance = 10 pF for all I2Cx pins (for 1 MHz mode only).

# PIC32MX5XX/6XX/7XX

FIGURE 31-18: CAN MODULE I/O TIMING CHARACTERISTICS

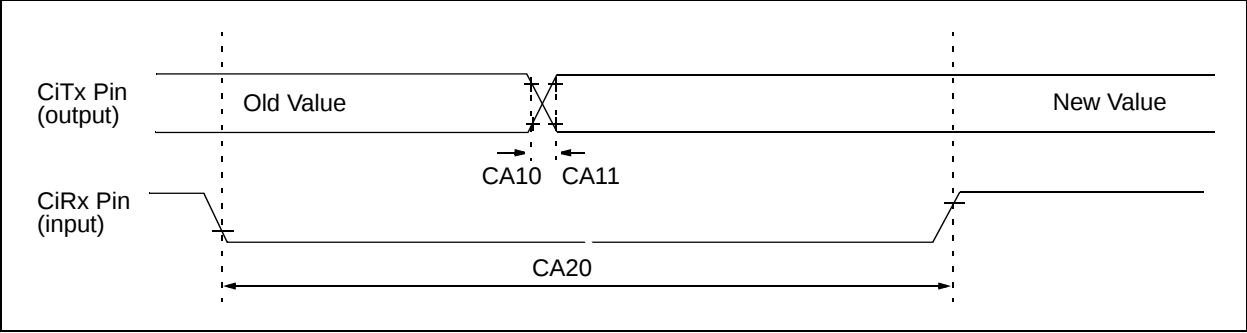


TABLE 31-34: CAN MODULE I/O TIMING REQUIREMENTS

| AC CHARACTERISTICS |        |                                           | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |                    |     |       |                    |
|--------------------|--------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-------|--------------------|
| Param No.          | Symbol | Characteristic <sup>(1)</sup>             | Min                                                                                                                                 | Typ <sup>(2)</sup> | Max | Units | Conditions         |
| CA10               | TioF   | Port Output Fall Time                     | —                                                                                                                                   | —                  | —   | ns    | See parameter D032 |
| CA11               | TioR   | Port Output Rise Time                     | —                                                                                                                                   | —                  | —   | ns    | See parameter D031 |
| CA20               | Tcwf   | Pulse Width to Trigger CAN Wake-up Filter | 500                                                                                                                                 | —                  | —   | ns    | —                  |

- Note 1:** These parameters are characterized but not tested in manufacturing.
- 2:** Data in “Typ” column is at 3.3V, 25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**TABLE 31-35: ETHERNET MODULE SPECIFICATIONS**

| AC CHARACTERISTICS              |                            | Standard Operating Conditions: 2.5V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |         |      |       |                    |
|---------------------------------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|-------|--------------------|
| Param. No.                      | Characteristic             | Min.                                                                                                                                                                     | Typical | Max. | Units | Conditions         |
| <b>Device Supply</b>            |                            |                                                                                                                                                                          |         |      |       |                    |
| ET20a                           | Module VDD Supply          | 2.5                                                                                                                                                                      | —       | 3.6  | V     |                    |
| ET20b                           | Module VDD Supply          | 2.7                                                                                                                                                                      | —       | 3.6  | V     | For RMII mode only |
| <b>MIIM Timing Requirements</b> |                            |                                                                                                                                                                          |         |      |       |                    |
| ET1                             | MDC Duty Cycle             | 40                                                                                                                                                                       | —       | 60   | %     |                    |
| ET2                             | MDC Period                 | 400                                                                                                                                                                      | —       | —    | ns    |                    |
| ET3                             | MDIO Output Delay          | 10                                                                                                                                                                       | —       | 10   | ns    |                    |
| ET4                             | MDIO Input Delay           | 0                                                                                                                                                                        | —       | 300  | ns    |                    |
| <b>MII Timing Requirements</b>  |                            |                                                                                                                                                                          |         |      |       |                    |
| ET5                             | TX Clock Frequency         | —                                                                                                                                                                        | 25      | —    | MHz   |                    |
| ET6                             | TX Clock Duty Cycle        | 35                                                                                                                                                                       | —       | 65   | %     |                    |
| ET7                             | ETXDx, ETEN, ETXERR Delay  | 0                                                                                                                                                                        | —       | 25   | ns    |                    |
| ET8                             | RX Clock Frequency         | —                                                                                                                                                                        | 25      | —    | MHz   |                    |
| ET9                             | RX Clock Duty Cycle        | 35                                                                                                                                                                       | —       | 65   | %     |                    |
| ET10                            | ERXDx, ERXDv, ERXERR Delay | 10                                                                                                                                                                       | —       | 30   | ns    |                    |
| <b>RMII Timing Requirements</b> |                            |                                                                                                                                                                          |         |      |       |                    |
| ET11                            | Reference Clock Frequency  | —                                                                                                                                                                        | 50      | —    | MHz   |                    |
| ET12                            | Reference Clock Duty Cycle | 35                                                                                                                                                                       | —       | 65   | %     |                    |
| ET13                            | ETXDx, ETEN, Delay         | 2                                                                                                                                                                        | —       | 16   | ns    |                    |
| ET14                            | ERXDx, ERXDv, ERXERR Delay | 2                                                                                                                                                                        | —       | 16   | ns    |                    |

# PIC32MX5XX/6XX/7XX

**TABLE 31-36: ADC MODULE SPECIFICATIONS**

| AC CHARACTERISTICS                                           |                                    |                                                | Standard Operating Conditions: 2.5V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |           |                            |               |                                                                                                 |
|--------------------------------------------------------------|------------------------------------|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------|---------------|-------------------------------------------------------------------------------------------------|
| Param. No.                                                   | Symbol                             | Characteristics                                | Min.                                                                                                                                                                     | Typical   | Max.                       | Units         | Conditions                                                                                      |
| <b>Device Supply</b>                                         |                                    |                                                |                                                                                                                                                                          |           |                            |               |                                                                                                 |
| AD01                                                         | AVDD                               | Module VDD Supply                              | Greater of VDD – 0.3 or 2.5                                                                                                                                              | —         | Lesser of VDD + 0.3 or 3.6 | V             |                                                                                                 |
| AD02                                                         | AVSS                               | Module Vss Supply                              | Vss                                                                                                                                                                      | —         | Vss + 0.3                  | V             |                                                                                                 |
| <b>Reference Inputs</b>                                      |                                    |                                                |                                                                                                                                                                          |           |                            |               |                                                                                                 |
| AD05                                                         | VREFH                              | Reference Voltage High                         | AVSS + 2.0                                                                                                                                                               | —         | AVDD                       | V             | (Note 1)                                                                                        |
| AD05a                                                        |                                    |                                                | 2.5                                                                                                                                                                      | —         | 3.6                        | V             | VREFH = AVDD (Note 3)                                                                           |
| AD06                                                         | VREFL                              | Reference Voltage Low                          | AVSS                                                                                                                                                                     | —         | VREFH – 2.0                | V             | (Note 1)                                                                                        |
| AD07                                                         | VREF                               | Absolute Reference Voltage (VREFH – VREFL)     | 2.0                                                                                                                                                                      | —         | AVDD                       | V             | (Note 3)                                                                                        |
| AD08                                                         | IREF                               | Current Drain                                  | —                                                                                                                                                                        | 250       | 400                        | $\mu\text{A}$ | ADC operating<br>ADC off                                                                        |
|                                                              |                                    |                                                |                                                                                                                                                                          | —         | 3                          | $\mu\text{A}$ |                                                                                                 |
| <b>Analog Input</b>                                          |                                    |                                                |                                                                                                                                                                          |           |                            |               |                                                                                                 |
| AD12                                                         | VIN <sub>H</sub> -VIN <sub>L</sub> | Full-Scale Input Span                          | VREFL                                                                                                                                                                    | —         | VREFH                      | V             |                                                                                                 |
|                                                              | VIN <sub>L</sub>                   | Absolute VIN <sub>L</sub> Input Voltage        | AVSS – 0.3                                                                                                                                                               | —         | AVDD/2                     | V             |                                                                                                 |
|                                                              | VIN                                | Absolute Input Voltage                         | AVSS – 0.3                                                                                                                                                               | —         | AVDD + 0.3                 | V             |                                                                                                 |
|                                                              |                                    | Leakage Current                                | —                                                                                                                                                                        | +/- 0.001 | +/-0.610                   | $\mu\text{A}$ | VIN <sub>L</sub> = AVSS = VREFL = 0V,<br>AVDD = VREFH = 3.3V<br>Source Impedance = 10K $\Omega$ |
| AD17                                                         | RIN                                | Recommended Impedance of Analog Voltage Source | —                                                                                                                                                                        | —         | 5K                         | $\Omega$      | (Note 1)                                                                                        |
| <b>ADC Accuracy – Measurements with External VREF+/VREF-</b> |                                    |                                                |                                                                                                                                                                          |           |                            |               |                                                                                                 |
| AD20c                                                        | Nr                                 | Resolution                                     | 10 data bits                                                                                                                                                             |           |                            | bits          |                                                                                                 |
| AD21c                                                        | INL                                | Integral Nonlinearity                          | > -1                                                                                                                                                                     | —         | < 1                        | LSb           | VIN <sub>L</sub> = AVSS = VREFL = 0V,<br>AVDD = VREFH = 3.3V                                    |
| AD22c                                                        | DNL                                | Differential Nonlinearity                      | > -1                                                                                                                                                                     | —         | < 1                        | LSb           | VIN <sub>L</sub> = AVSS = VREFL = 0V,<br>AVDD = VREFH = 3.3V<br>(Note 2)                        |
| AD23c                                                        | GERR                               | Gain Error                                     | > -1                                                                                                                                                                     | —         | < 1                        | LSb           | VIN <sub>L</sub> = AVSS = VREFL = 0V,<br>AVDD = VREFH = 3.3V                                    |
| AD24n                                                        | EOFF                               | Offset Error                                   | > -1                                                                                                                                                                     | —         | < 1                        | LSb           | VIN <sub>L</sub> = AVSS = 0V,<br>AVDD = 3.3V                                                    |
| AD25c                                                        | —                                  | Monotonicity                                   | —                                                                                                                                                                        | —         | —                          | —             | Guaranteed                                                                                      |

**Note 1:** These parameters are not characterized or tested in manufacturing.

**2:** With no missing codes.

**3:** These parameters are characterized, but not tested in manufacturing.

**TABLE 31-36: ADC MODULE SPECIFICATIONS (CONTINUED)**

| AC CHARACTERISTICS                                           |                  |                           | Standard Operating Conditions: 2.5V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |         |      |       |                                                                                              |
|--------------------------------------------------------------|------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|-------|----------------------------------------------------------------------------------------------|
| Param. No.                                                   | Symbol           | Characteristics           | Min.                                                                                                                                                                     | Typical | Max. | Units | Conditions                                                                                   |
| <b>ADC Accuracy – Measurements with Internal VREF+/VREF-</b> |                  |                           |                                                                                                                                                                          |         |      |       |                                                                                              |
| AD20d                                                        | Nr               | Resolution                | 10 data bits                                                                                                                                                             |         |      | bits  | (Note 3)                                                                                     |
| AD21d                                                        | INL              | Integral Nonlinearity     | > -1                                                                                                                                                                     | —       | < 1  | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V,<br>AV <sub>DD</sub> = 2.5V to 3.6V<br>(Note 3)     |
| AD22d                                                        | DNL              | Differential Nonlinearity | > -1                                                                                                                                                                     | —       | < 1  | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V,<br>AV <sub>DD</sub> = 2.5V to 3.6V<br>(Notes 2, 3) |
| AD23d                                                        | GERR             | Gain Error                | > -4                                                                                                                                                                     | —       | < 4  | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V,<br>AV <sub>DD</sub> = 2.5V to 3.6V<br>(Note 3)     |
| AD24d                                                        | E <sub>OFF</sub> | Offset Error              | > -2                                                                                                                                                                     | —       | < 2  | LSb   | V <sub>INL</sub> = AV <sub>SS</sub> = 0V,<br>AV <sub>DD</sub> = 2.5V to 3.6V<br>(Note 3)     |
| AD25d                                                        | —                | Monotonicity              | —                                                                                                                                                                        | —       | —    | —     | Guaranteed                                                                                   |




**Note 1:** These parameters are not characterized or tested in manufacturing.

**2:** With no missing codes.

**3:** These parameters are characterized, but not tested in manufacturing.

# PIC32MX5XX/6XX/7XX

**TABLE 31-37: 10-BIT CONVERSION RATE PARAMETERS**
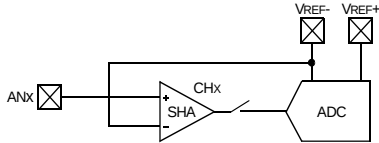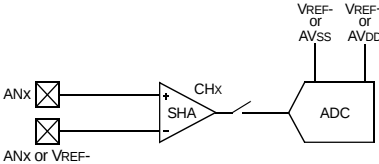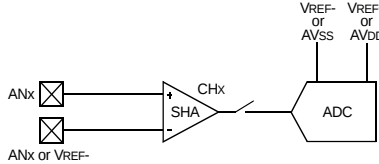
| PIC32MX 10-bit A/D Converter Conversion Rates (Note 2) |             |                   |        |              |                |                                                                                      |
|--------------------------------------------------------|-------------|-------------------|--------|--------------|----------------|--------------------------------------------------------------------------------------|
| ADC Speed                                              | TAD Minimum | Sampling Time Min | Rs Max | VDD          | Temperature    | ADC Channels Configuration                                                           |
| 1 Msps to 400 ksps<br>(Note 1)                         | 65 ns       | 132 ns            | 500Ω   | 3.0V to 3.6V | -40°C to +85°C |   |
| Up to 400 ksps                                         | 200 ns      | 200 ns            | 5.0 kΩ | 2.5V to 3.6V | -40°C to +85°C |   |
| Up to 300 ksps                                         | 200 ns      | 200 ns            | 5.0 kΩ | 2.5V to 3.6V | -40°C to +85°C |  |

**Note 1:** External VREF- and VREF+ pins must be used for correct operation.

**2:** These parameters are characterized, but not tested in manufacturing.

**TABLE 31-38: A/D CONVERSION TIMING REQUIREMENTS**

| AC CHARACTERISTICS       |        |                                                                            | Standard Operating Conditions: 2.5V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |                        |         |               |                                                      |
|--------------------------|--------|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------|---------------|------------------------------------------------------|
| Param. No.               | Symbol | Characteristics                                                            | Min.                                                                                                                                                                     | Typical <sup>(1)</sup> | Max.    | Units         | Conditions                                           |
| <b>Clock Parameters</b>  |        |                                                                            |                                                                                                                                                                          |                        |         |               |                                                      |
| AD50                     | TAD    | A/D Clock Period ( <b>Note 2</b> )                                         | 65                                                                                                                                                                       | —                      | —       | ns            | See Table 31-37.                                     |
| <b>Conversion Rate</b>   |        |                                                                            |                                                                                                                                                                          |                        |         |               |                                                      |
| AD55                     | TCONV  | Conversion Time                                                            | —                                                                                                                                                                        | 12 TAD                 | —       | —             | —                                                    |
| AD56                     | FCNV   | Throughput Rate<br>(Sampling Speed)                                        | —                                                                                                                                                                        | —                      | 1000    | ksps          | AVDD = 3.0V to 3.6V                                  |
|                          |        |                                                                            | —                                                                                                                                                                        | —                      | 400     | ksps          | AVDD = 2.5V to 3.6V                                  |
| AD57                     | TSAMP  | Sample Time                                                                | 1                                                                                                                                                                        | —                      | 31      | TAD           | TSAMP must be $\geq 132$ ns.                         |
| <b>Timing Parameters</b> |        |                                                                            |                                                                                                                                                                          |                        |         |               |                                                      |
| AD60                     | TPCS   | Conversion Start from Sample Trigger <sup>(3)</sup>                        | —                                                                                                                                                                        | 1.0 TAD                | —       | —             | Auto-Convert Trigger (SSRC<2:0> = 111) not selected. |
| AD61                     | TPSS   | Sample Start from Setting Sample (SAMP) bit                                | 0.5 TAD                                                                                                                                                                  | —                      | 1.5 TAD | —             | —                                                    |
| AD62                     | TCSS   | Conversion Completion to Sample Start (ASAM = 1)<br>( <b>Note 3</b> )      | —                                                                                                                                                                        | 0.5 TAD                | —       | —             | —                                                    |
| AD63                     | TDPU   | Time to Stabilize Analog Stage from A/D OFF to A/D ON<br>( <b>Note 3</b> ) | —                                                                                                                                                                        | —                      | 2       | $\mu\text{s}$ | —                                                    |


**Note 1:** These parameters are characterized, but not tested in manufacturing.

**2:** Because the sample caps will eventually lose charge, clock rates below 10 kHz can affect linearity performance, especially at elevated temperatures.

**3:** Characterized by design but not tested.


# PIC32MX5XX/6XX/7XX

**FIGURE 31-19: A/D CONVERSION (10-BIT MODE) TIMING CHARACTERISTICS**  
(CHPS<1:0> = 01, SIMSAM = 0, ASAM = 0, SSRC<2:0> = 000)

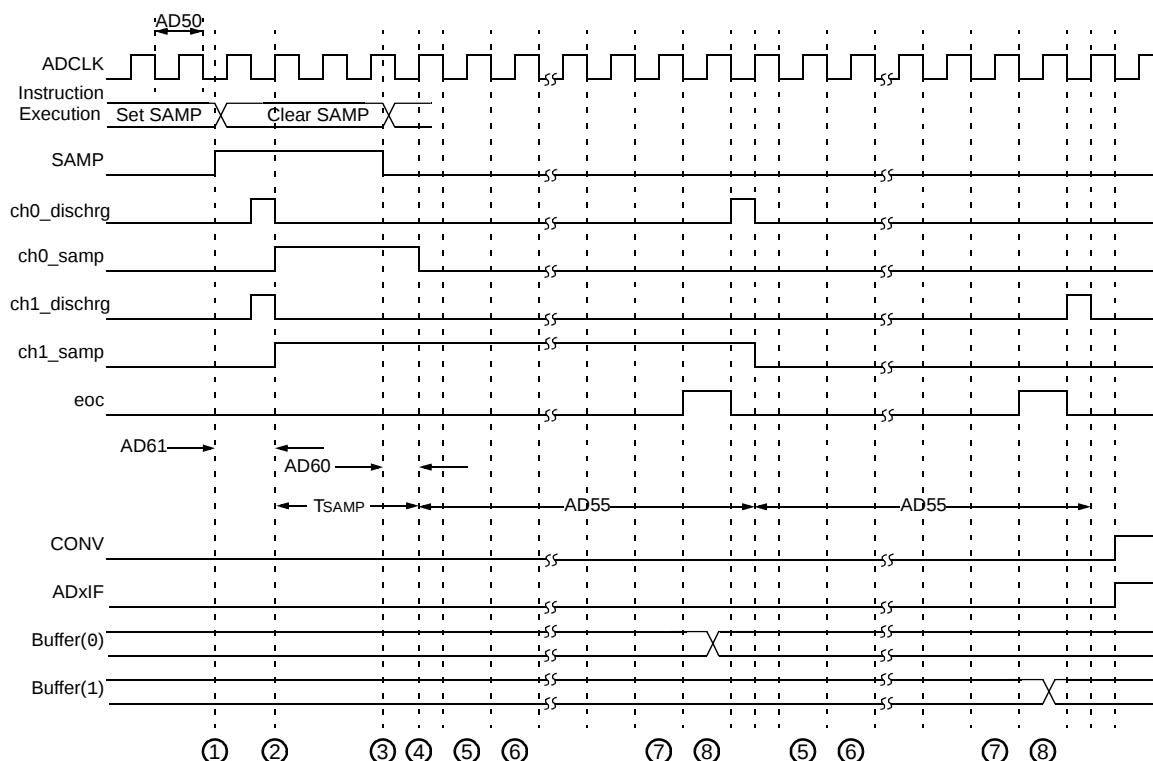


- ① – Software sets ADxCON.SAMP to start sampling.
- ② – Sampling starts after discharge period. TSAMP is described in the “PIC32MX Family Reference Manual” (DS61132).
- ③ – Software clears ADxCON.SAMP to start conversion.
- ④ – Sampling ends, conversion sequence starts.
- ⑤ – Convert bit 9.
- ⑥ – Convert bit 8.
- ⑦ – Convert bit 0.
- ⑧ – One TAD for end of conversion.

**FIGURE 31-20: A/D CONVERSION (10-BIT MODE) TIMING CHARACTERISTICS (CHPS<1:0> = 01, SIMSAM = 0, ASAM = 1, SSRC<2:0> = 111, SAMC<4:0> = 00001**

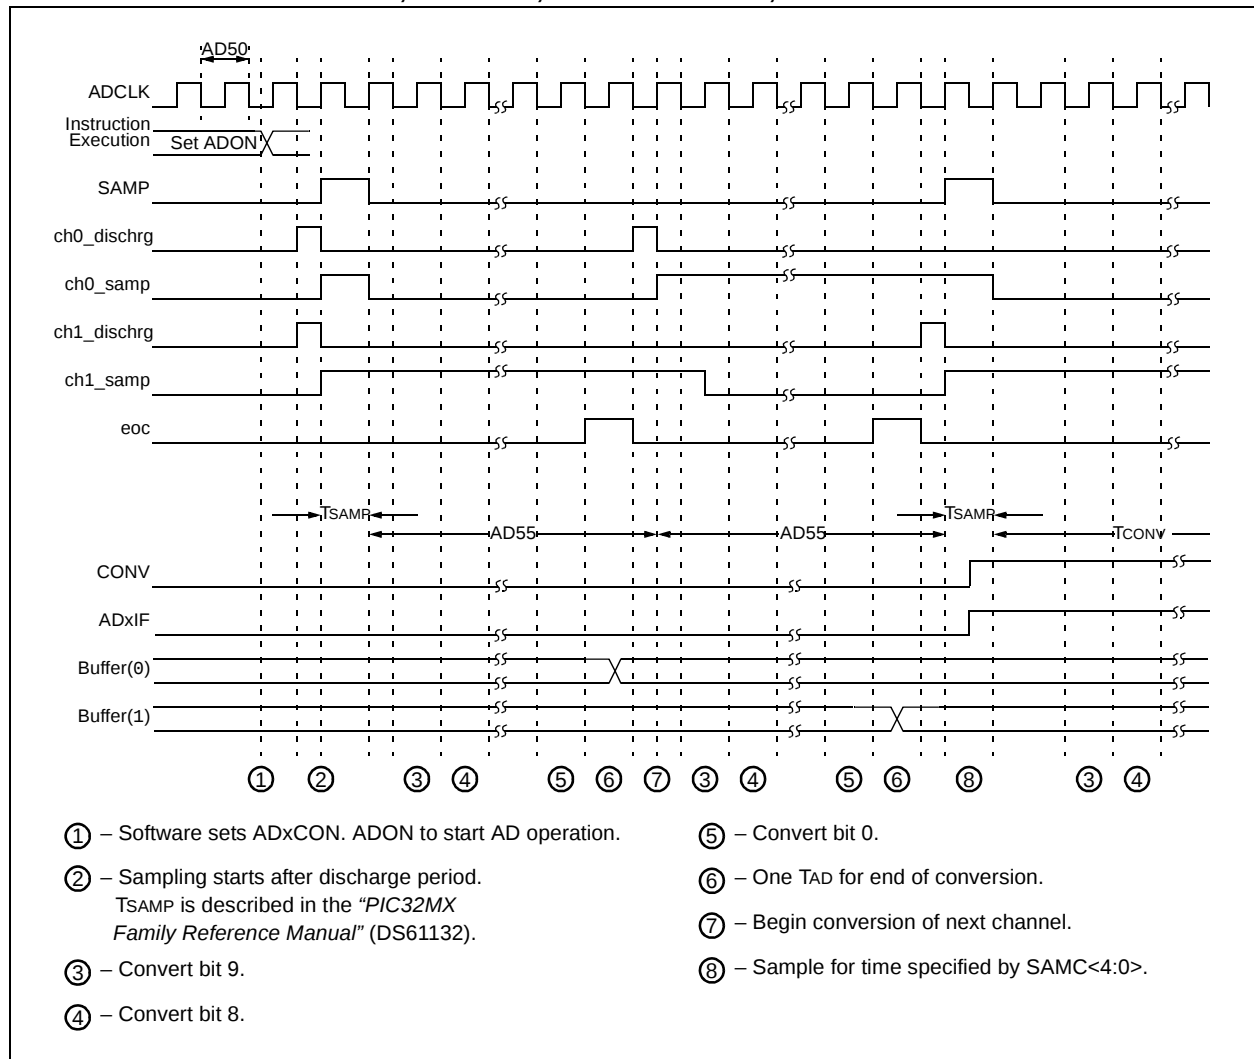

# PIC32MX5XX/6XX/7XX

**FIGURE 31-21: PARALLEL SLAVE PORT TIMING**

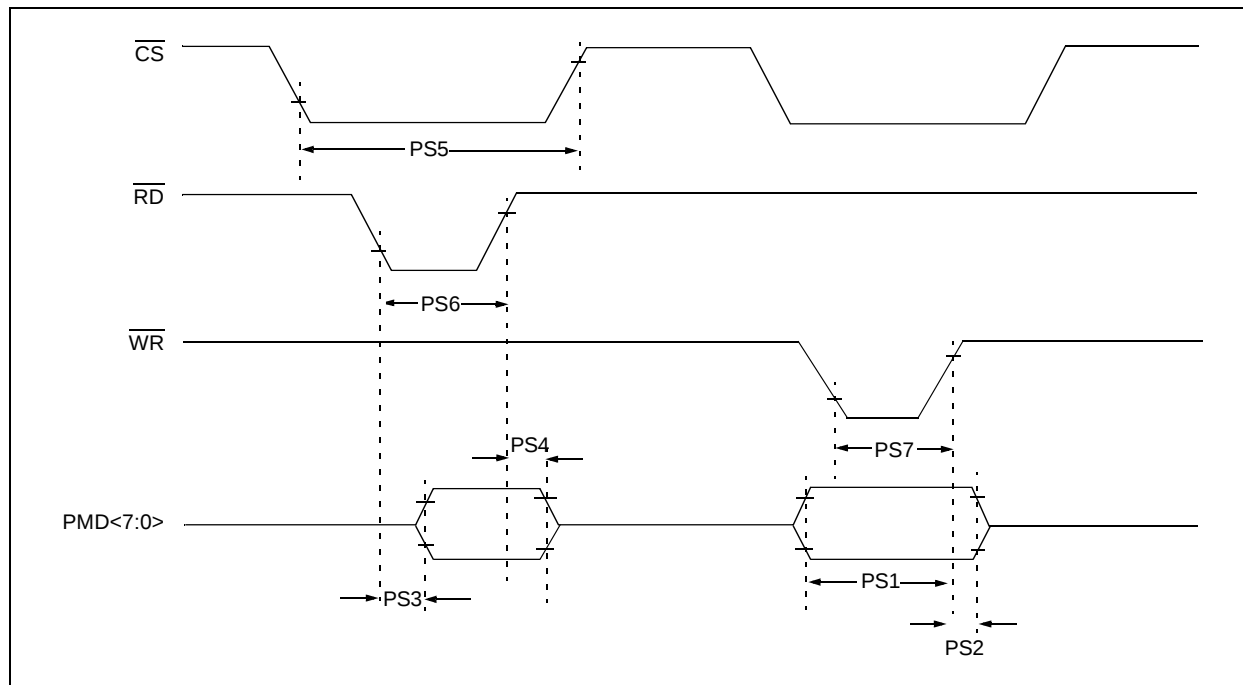


**TABLE 31-39: PARALLEL SLAVE PORT REQUIREMENTS**

| AC CHARACTERISTICS |          |                                                                               |      | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |       |            |
|--------------------|----------|-------------------------------------------------------------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------|
| Param. No.         | Symbol   | Characteristics <sup>(1)</sup>                                                | Min. | Typical                                                                                                                                                                  | Max. | Units | Conditions |
| PS1                | TdtV2wrH | Data In Valid before $\overline{WR}$ or $\overline{CS}$ Inactive (setup time) | 20   | —                                                                                                                                                                        | —    | ns    |            |
| PS2                | TwrH2dtI | $\overline{WR}$ or $\overline{CS}$ Inactive to Data-In Invalid (hold time)    | 20   | —                                                                                                                                                                        | —    | ns    |            |
| PS3                | TrdL2dtV | $\overline{RD}$ and $\overline{CS}$ Active to Data-Out Valid                  | —    | —                                                                                                                                                                        | 60   | ns    |            |
| PS4                | TrdH2dtI | $\overline{RD}$ Active or $\overline{CS}$ Inactive to Data-Out Invalid        | 0    | —                                                                                                                                                                        | 10   | ns    |            |
| PS5                | Tcs      | $\overline{CS}$ Active Time                                                   | 25   | —                                                                                                                                                                        | —    | ns    |            |
| PS6                | TWR      | $\overline{WR}$ Active Time                                                   | 25   | —                                                                                                                                                                        | —    | ns    |            |
| PS7                | TRD      | $\overline{RD}$ Active Time                                                   | 25   | —                                                                                                                                                                        | —    | ns    |            |

**Note 1:** These parameters are characterized, but not tested in manufacturing.

**FIGURE 31-22: PARALLEL MASTER PORT READ TIMING DIAGRAM**

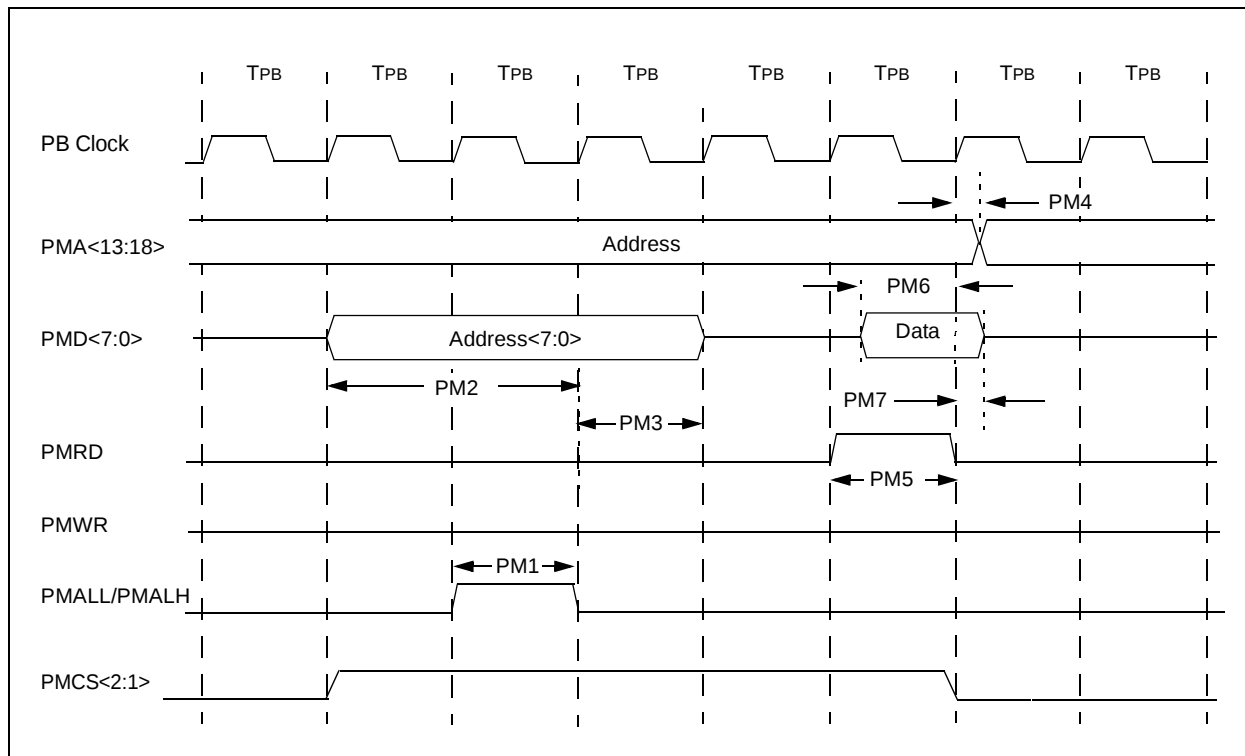

**TABLE 31-40: PARALLEL MASTER PORT READ TIMING REQUIREMENTS**

| AC CHARACTERISTICS |         |                                                                | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial |         |      |       |            |
|--------------------|---------|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------|------|-------|------------|
| Param. No.         | Symbol  | Characteristics <sup>(1)</sup>                                 | Min.                                                                                                                                | Typical | Max. | Units | Conditions |
| PM1                | TLAT    | PMALL/PMALH Pulse Width                                        | —                                                                                                                                   | 1 TPB   | —    | —     |            |
| PM2                | TDSU    | Address Out Valid to PMALL/PMALH Invalid (address setup time)  | —                                                                                                                                   | 2 TPB   | —    | —     |            |
| PM3                | TADHOLD | PMALL/PMALH Invalid to Address Out Invalid (address hold time) | —                                                                                                                                   | 1 TPB   | —    | —     |            |
| PM4                | TAHOLD  | PMRD Inactive to Address Out Invalid (address hold time)       | 1                                                                                                                                   | —       | —    | ns    |            |
| PM5                | TRD     | PMRD Pulse Width                                               | —                                                                                                                                   | 1 TPB   | —    | —     |            |
| PM6                | Tdsu    | PMRD or PMENB Active to Data In Valid (data setup time)        | 5                                                                                                                                   | —       | —    | ns    |            |
| PM7                | TDHOLD  | PMRD or PMENB Inactive to Data In Invalid (data hold time)     | —                                                                                                                                   | 0       | —    | ns    |            |

**Note 1:** These parameters are characterized, but not tested in manufacturing.

# PIC32MX5XX/6XX/7XX

FIGURE 31-23: PARALLEL MASTER PORT WRITE TIMING DIAGRAM

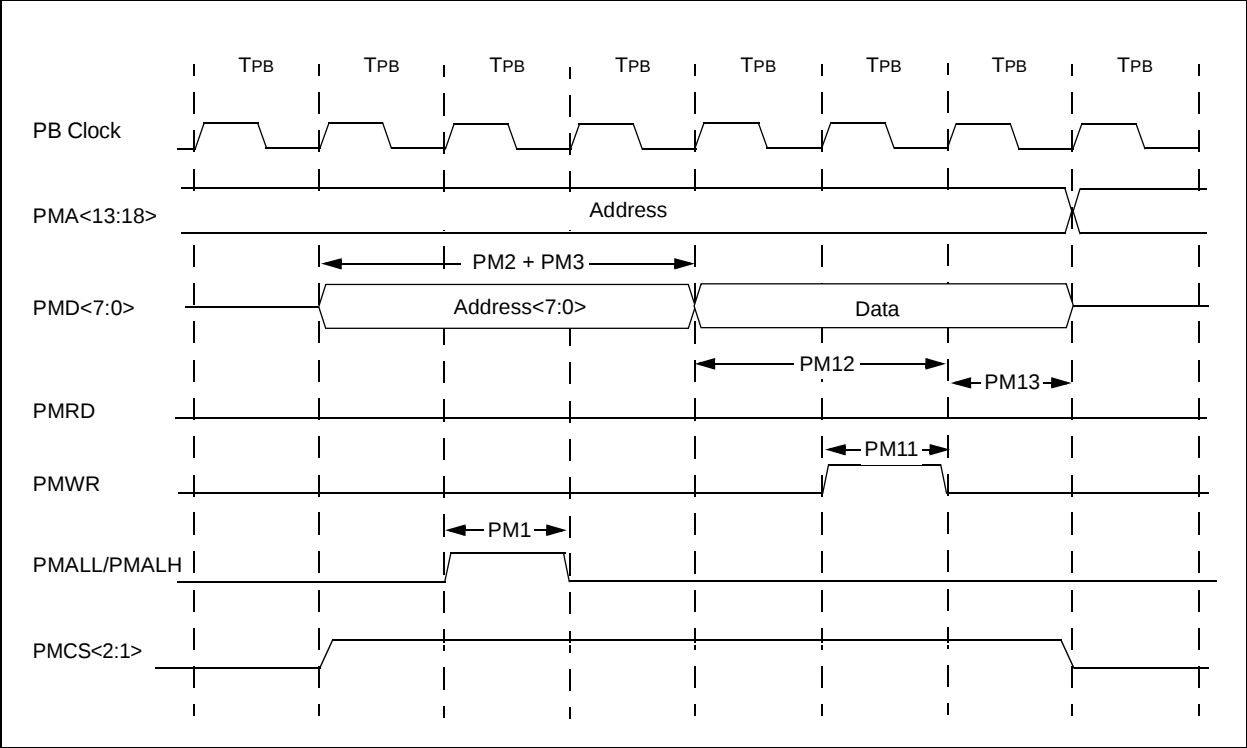


TABLE 31-41: PARALLEL MASTER PORT WRITE TIMING REQUIREMENTS

| AC CHARACTERISTICS |         |                                                                     | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |         |      |       |            |
|--------------------|---------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|-------|------------|
| Param. No.         | Symbol  | Characteristics <sup>(1)</sup>                                      | Min.                                                                                                                                                                     | Typical | Max. | Units | Conditions |
| PM11               | TWR     | PMWR Pulse Width                                                    | —                                                                                                                                                                        | 1 $TPB$ | —    | —     |            |
| PM12               | TdVSU   | Data Out Valid before PMWR or PMENB goes Inactive (data setup time) | —                                                                                                                                                                        | 2 $TPB$ | —    | —     |            |
| PM13               | TdVHOLD | PMWR or PMEMB Invalid to Data Out Invalid (data hold time)          | —                                                                                                                                                                        | 1 $TPB$ | —    | —     |            |

**Note 1:** These parameters are characterized, but not tested in manufacturing.


**TABLE 31-42: OTG ELECTRICAL SPECIFICATIONS**

| AC CHARACTERISTICS |        |                                   | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |         |      |          |                                                                           |
|--------------------|--------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|----------|---------------------------------------------------------------------------|
| Param. No.         | Symbol | Characteristics <sup>(1)</sup>    | Min.                                                                                                                                                                     | Typical | Max. | Units    | Conditions                                                                |
| USB313             | VUSB   | USB Voltage                       | 3.0                                                                                                                                                                      | —       | 3.6  | V        | Voltage on bus must be in this range for proper USB operation.            |
| USB315             | VILUSB | Input Low Voltage for USB Buffer  | —                                                                                                                                                                        | —       | 0.8  | V        |                                                                           |
| USB316             | VIHUSB | Input High Voltage for USB Buffer | 2.0                                                                                                                                                                      | —       | —    | V        |                                                                           |
| USB318             | VDIFS  | Differential Input Sensitivity    | —                                                                                                                                                                        | —       | 0.2  | V        |                                                                           |
| USB319             | VCM    | Differential Common Mode Range    | 0.8                                                                                                                                                                      | —       | 2.5  | V        | The difference between D+ and D- must exceed this value while VCM is met. |
| USB320             | ZOUT   | Driver Output Impedance           | 28.0                                                                                                                                                                     | —       | 44.0 | $\Omega$ |                                                                           |
| USB321             | VoL    | Voltage Output Low                | 0.0                                                                                                                                                                      | —       | 0.3  | V        | 14.25 k $\Omega$ load connected to 3.6V                                   |
| USB322             | VoH    | Voltage Output High               | 2.8                                                                                                                                                                      | —       | 3.6  | V        | 14.25 k $\Omega$ load connected to ground                                 |

**Note 1:** These parameters are characterized, but not tested in manufacturing.

# PIC32MX5XX/6XX/7XX

**FIGURE 31-24: EJTAG TIMING CHARACTERISTICS**

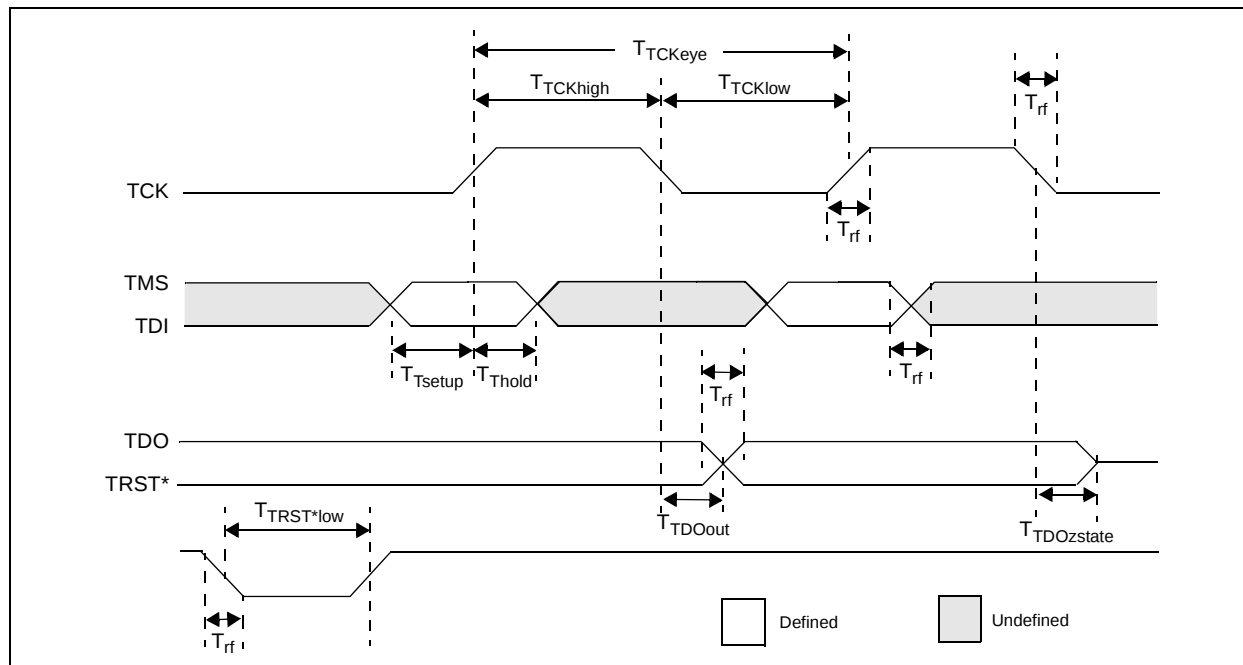

**TABLE 31-43: EJTAG TIMING REQUIREMENTS**


| AC CHARACTERISTICS |            |                                                  | Standard Operating Conditions: 2.3V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial |      |       |            |
|--------------------|------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------|
| Param. No.         | Symbol     | Description <sup>(1)</sup>                       | Min.                                                                                                                                                                     | Max. | Units | Conditions |
| EJ1                | TTCKCYC    | TCK Cycle Time                                   | 25                                                                                                                                                                       | —    | ns    |            |
| EJ2                | TTCKHIGH   | TCK High Time                                    | 10                                                                                                                                                                       | —    | ns    |            |
| EJ3                | TTCKLOW    | TCK Low Time                                     | 10                                                                                                                                                                       | —    | ns    |            |
| EJ4                | TTSETUP    | TAP Signals Setup Time Before Rising TCK         | 5                                                                                                                                                                        | —    | ns    |            |
| EJ5                | TTHOLD     | TAP Signals Hold Time After Rising TCK           | 3                                                                                                                                                                        | —    | ns    |            |
| EJ6                | TTDOOUT    | TDO Output Delay Time From Falling TCK           | —                                                                                                                                                                        | 5    | ns    |            |
| EJ7                | TTDOZSTATE | TDO 3-State Delay Time From Falling TCK          | —                                                                                                                                                                        | 5    | ns    |            |
| EJ8                | TTRSTLOW   | TRST Low Time                                    | 25                                                                                                                                                                       | —    | ns    |            |
| EJ9                | TRF        | TAP Signals Rise/Fall Time, All Input and Output | —                                                                                                                                                                        | —    | ns    |            |

**Note 1:** These parameters are characterized, but not tested in manufacturing.


## 32.0 PACKAGING INFORMATION

### 32.1 Package Marking Information

64-Lead TQFP (10x10x1 mm)



Example



100-Lead TQFP (14x14x1 mm)



Example



100-Lead TQFP (12x12x1 mm)



Example




|                |        |                                                                                                                  |
|----------------|--------|------------------------------------------------------------------------------------------------------------------|
| <b>Legend:</b> | XX...X | Customer-specific information                                                                                    |
|                | Y      | Year code (last digit of calendar year)                                                                          |
|                | YY     | Year code (last 2 digits of calendar year)                                                                       |
|                | WW     | Week code (week of January 1 is week '01')                                                                       |
|                | NNN    | Alphanumeric traceability code                                                                                   |
|                |        | Pb-free JEDEC designator for Matte Tin (Sn)                                                                      |
|                | *      | This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package. |

**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

# PIC32MX5XX/6XX/7XX

## 32.1 Package Marking Information (Continued)


64-Lead QFN (9x9x0.9 mm)



Example



121-Lead XBGA (10x10x1.1 mm)



Example




|                |                                                                                                                                                                                                         |                                                                                                                  |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Legend:</b> | XX...X                                                                                                                                                                                                  | Customer-specific information                                                                                    |
|                | Y                                                                                                                                                                                                       | Year code (last digit of calendar year)                                                                          |
|                | YY                                                                                                                                                                                                      | Year code (last 2 digits of calendar year)                                                                       |
|                | WW                                                                                                                                                                                                      | Week code (week of January 1 is week '01')                                                                       |
|                | NNN                                                                                                                                                                                                     | Alphanumeric traceability code                                                                                   |
|                | *                                                                                                                                                                                                       | Pb-free JEDEC designator for Matte Tin (Sn)                                                                      |
|                |                                                                                                                                                                                                         | This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package. |
| <b>Note:</b>   | In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. |                                                                                                                  |

## 32.2 Package Details

The following sections give the technical details of the packages.

### 64-Lead Plastic Thin Quad Flatpack (PT) – 10x10x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

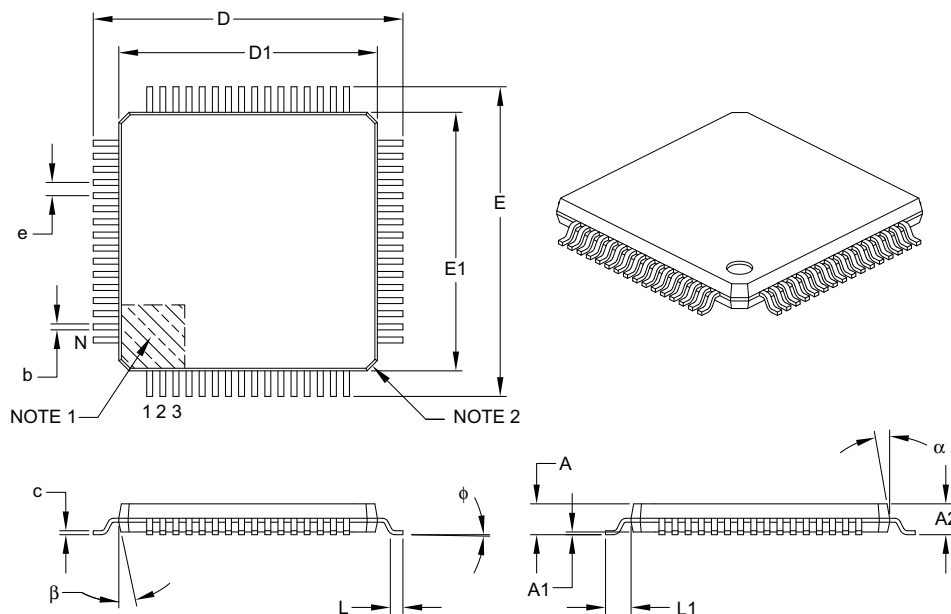

| Units                    |          | MILLIMETERS |      |      |
|--------------------------|----------|-------------|------|------|
| Dimension Limits         |          | MIN         | NOM  | MAX  |
| Number of Leads          | N        | 64          |      |      |
| Lead Pitch               | e        | 0.50 BSC    |      |      |
| Overall Height           | A        | –           | –    | 1.20 |
| Molded Package Thickness | A2       | 0.95        | 1.00 | 1.05 |
| Standoff                 | A1       | 0.05        | –    | 0.15 |
| Foot Length              | L        | 0.45        | 0.60 | 0.75 |
| Footprint                | L1       | 1.00 REF    |      |      |
| Foot Angle               | $\phi$   | 0°          | 3.5° | 7°   |
| Overall Width            | E        | 12.00 BSC   |      |      |
| Overall Length           | D        | 12.00 BSC   |      |      |
| Molded Package Width     | E1       | 10.00 BSC   |      |      |
| Molded Package Length    | D1       | 10.00 BSC   |      |      |
| Lead Thickness           | c        | 0.09        | –    | 0.20 |
| Lead Width               | b        | 0.17        | 0.22 | 0.27 |
| Mold Draft Angle Top     | $\alpha$ | 11°         | 12°  | 13°  |
| Mold Draft Angle Bottom  | $\beta$  | 11°         | 12°  | 13°  |

#### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Chamfers at corners are optional; size may vary.
- Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25 mm per side.
- Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-085B

# PIC32MX5XX/6XX/7XX

## 64-Lead Plastic Thin Quad Flatpack (PT) – 10x10x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

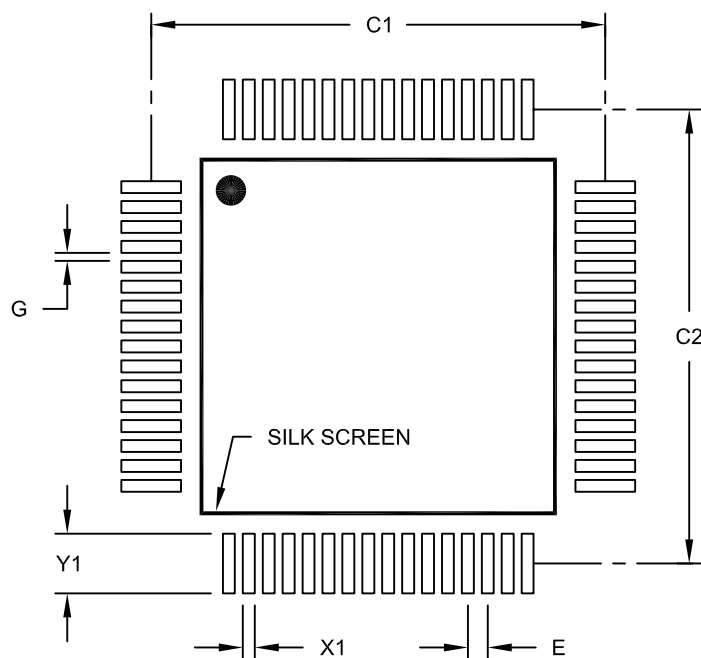

RECOMMENDED LAND PATTERN

| Units                    |    | MILLIMETERS |       |      |
|--------------------------|----|-------------|-------|------|
| Dimension Limits         |    | MIN         | NOM   | MAX  |
| Contact Pitch            | E  | 0.50 BSC    |       |      |
| Contact Pad Spacing      | C1 |             | 11.40 |      |
| Contact Pad Spacing      | C2 |             | 11.40 |      |
| Contact Pad Width (X64)  | X1 |             |       | 0.30 |
| Contact Pad Length (X64) | Y1 |             |       | 1.50 |
| Distance Between Pads    | G  | 0.20        |       |      |

**Notes:**


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2085A

## 64-Lead Plastic Quad Flat, No Lead Package (MR) – 9x9x0.9 mm Body [QFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

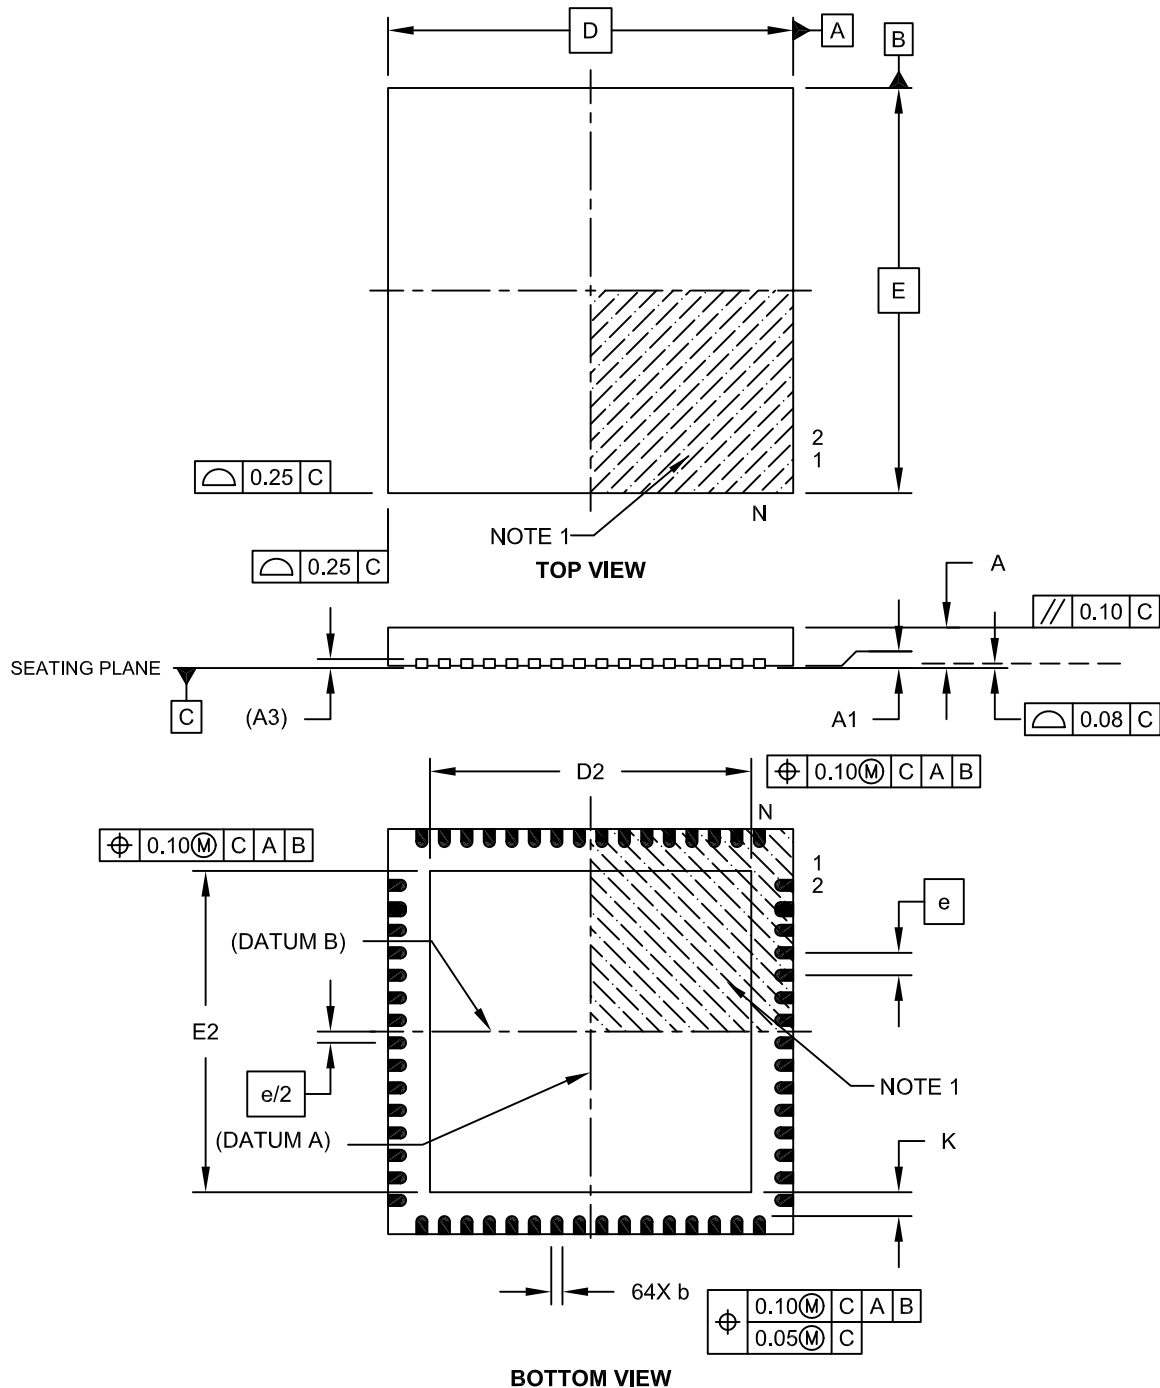


Microchip Technology Drawing C04-149B Sheet 1 of 2

# PIC32MX5XX/6XX/7XX

## 64-Lead Plastic Quad Flat, No Lead Package (MR) – 9x9x0.9 mm Body [QFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

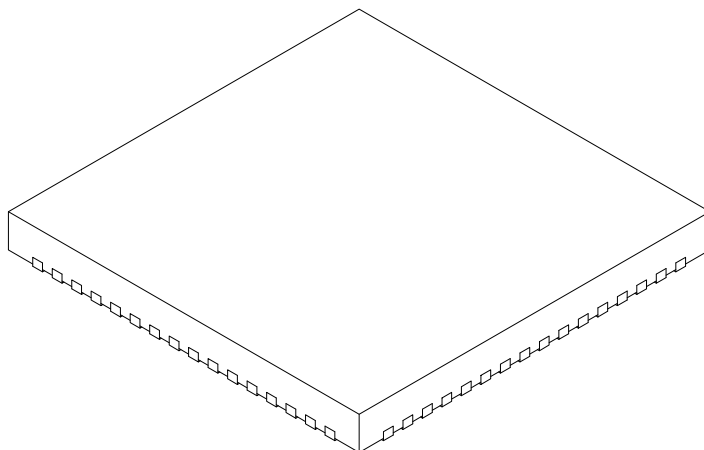

|                        |    | Units            | MILLIMETERS |      |      |
|------------------------|----|------------------|-------------|------|------|
|                        |    | Dimension Limits | MIN         | NOM  | MAX  |
| Number of Pins         | N  |                  | 64          |      |      |
| Pitch                  | e  |                  | 0.50 BSC    |      |      |
| Overall Height         | A  |                  | 0.80        | 0.90 | 1.00 |
| Standoff               | A1 |                  | 0.00        | 0.02 | 0.05 |
| Contact Thickness      | A3 |                  | 0.20 REF    |      |      |
| Overall Width          | E  |                  | 9.00 BSC    |      |      |
| Exposed Pad Width      | E2 |                  | 7.05        | 7.15 | 7.50 |
| Overall Length         | D  |                  | 9.00 BSC    |      |      |
| Exposed Pad Length     | D2 |                  | 7.05        | 7.15 | 7.50 |
| Contact Width          | b  |                  | 0.18        | 0.25 | 0.30 |
| Contact Length         | L  |                  | 0.30        | 0.40 | 0.50 |
| Contact-to-Exposed Pad | K  |                  | 0.20        | -    | -    |

### Notes:


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated.
- Dimensioning and tolerancing per ASME Y14.5M.
  - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
  - REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-149B Sheet 2 of 2

# PIC32MX5XX/6XX/7XX

64-Lead Plastic Quad Flat, No Lead Package (MR) – 9x9x0.9 mm Body [QFN]  
With 0.40 mm Contact Length

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

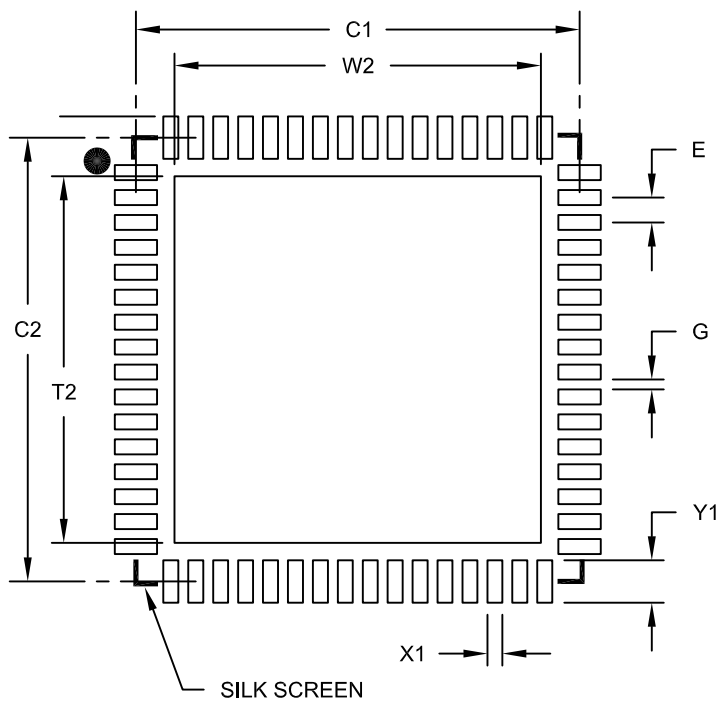

RECOMMENDED LAND PATTERN

| Units                      |    | MILLIMETERS |      |      |
|----------------------------|----|-------------|------|------|
| Dimension Limits           |    | MIN         | NOM  | MAX  |
| Contact Pitch              | E  | 0.50 BSC    |      |      |
| Optional Center Pad Width  | W2 |             |      | 7.35 |
| Optional Center Pad Length | T2 |             |      | 7.35 |
| Contact Pad Spacing        | C1 |             | 8.90 |      |
| Contact Pad Spacing        | C2 |             | 8.90 |      |
| Contact Pad Width (X64)    | X1 |             |      | 0.30 |
| Contact Pad Length (X64)   | Y1 |             |      | 0.85 |
| Distance Between Pads      | G  | 0.20        |      |      |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2149A

# PIC32MX5XX/6XX/7XX

## 100-Lead Plastic Thin Quad Flatpack (PF) – 14x14x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

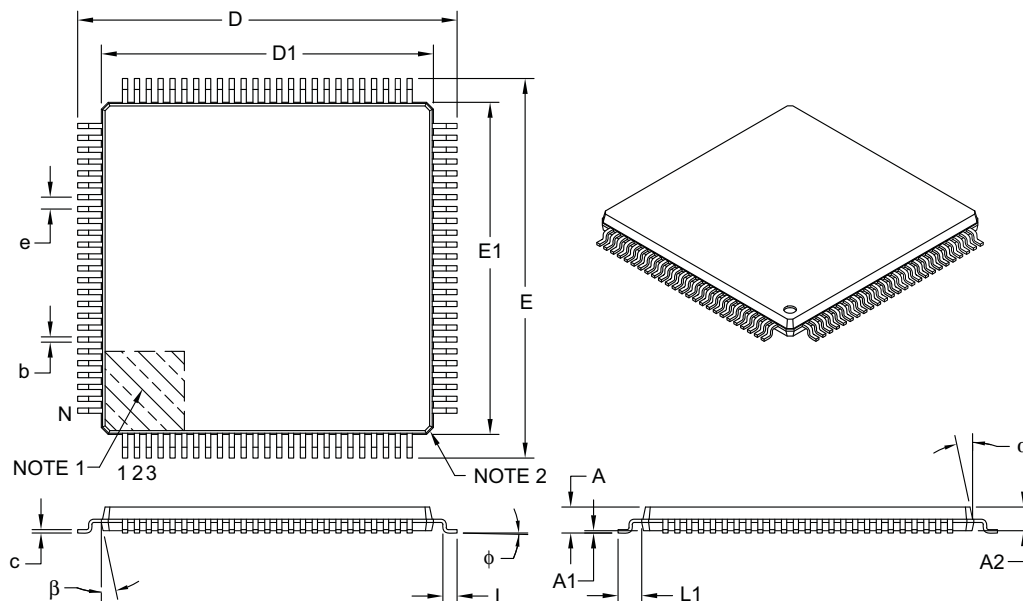

|                          |    | Units | MILLIMETERS |      |      |
|--------------------------|----|-------|-------------|------|------|
| Dimension Limits         |    |       | MIN         | NOM  | MAX  |
| Number of Leads          | N  |       | 100         |      |      |
| Lead Pitch               | e  |       | 0.50 BSC    |      |      |
| Overall Height           | A  |       | –           | –    | 1.20 |
| Molded Package Thickness | A2 |       | 0.95        | 1.00 | 1.05 |
| Standoff                 | A1 |       | 0.05        | –    | 0.15 |
| Foot Length              | L  |       | 0.45        | 0.60 | 0.75 |
| Footprint                | L1 |       | 1.00 REF    |      |      |
| Foot Angle               | φ  |       | 0°          | 3.5° | 7°   |
| Overall Width            | E  |       | 16.00 BSC   |      |      |
| Overall Length           | D  |       | 16.00 BSC   |      |      |
| Molded Package Width     | E1 |       | 14.00 BSC   |      |      |
| Molded Package Length    | D1 |       | 14.00 BSC   |      |      |
| Lead Thickness           | c  |       | 0.09        | –    | 0.20 |
| Lead Width               | b  |       | 0.17        | 0.22 | 0.27 |
| Mold Draft Angle Top     | α  |       | 11°         | 12°  | 13°  |
| Mold Draft Angle Bottom  | β  |       | 11°         | 12°  | 13°  |

### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Chamfers at corners are optional; size may vary.
- Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25 mm per side.
- Dimensioning and tolerancing per ASME Y14.5M.


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-110B

## 100-Lead Plastic Thin Quad Flatpack (PF) – 14x14x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

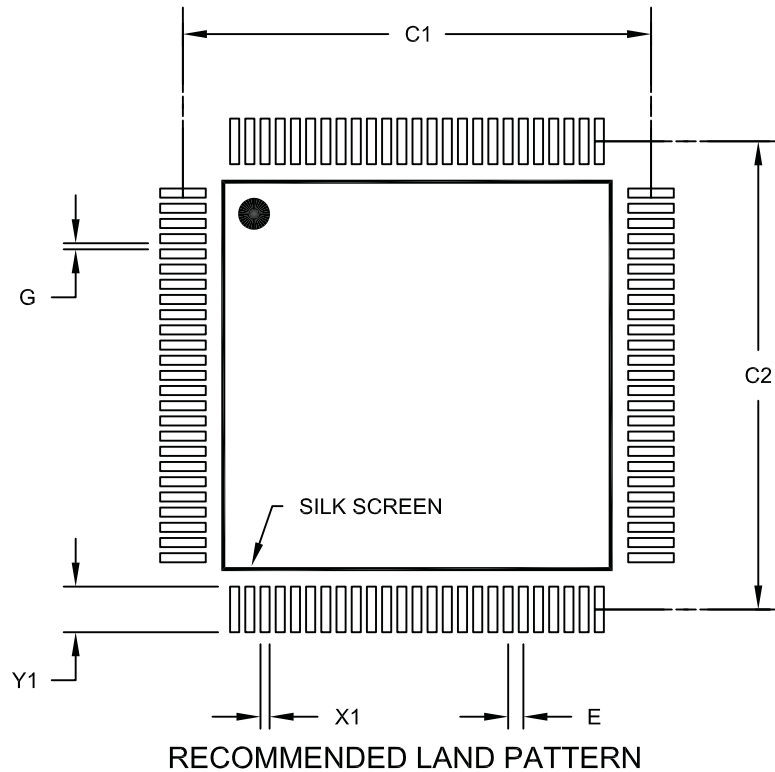

| Units                     |    | MILLIMETERS |       |      |
|---------------------------|----|-------------|-------|------|
| Dimension Limits          |    | MIN         | NOM   | MAX  |
| Contact Pitch             | E  | 0.50 BSC    |       |      |
| Contact Pad Spacing       | C1 |             | 15.40 |      |
| Contact Pad Spacing       | C2 |             | 15.40 |      |
| Contact Pad Width (X100)  | X1 |             |       | 0.30 |
| Contact Pad Length (X100) | Y1 |             |       | 1.50 |
| Distance Between Pads     | G  | 0.20        |       |      |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2110A

# PIC32MX5XX/6XX/7XX

## 100-Lead Plastic Thin Quad Flatpack (PT) – 12x12x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

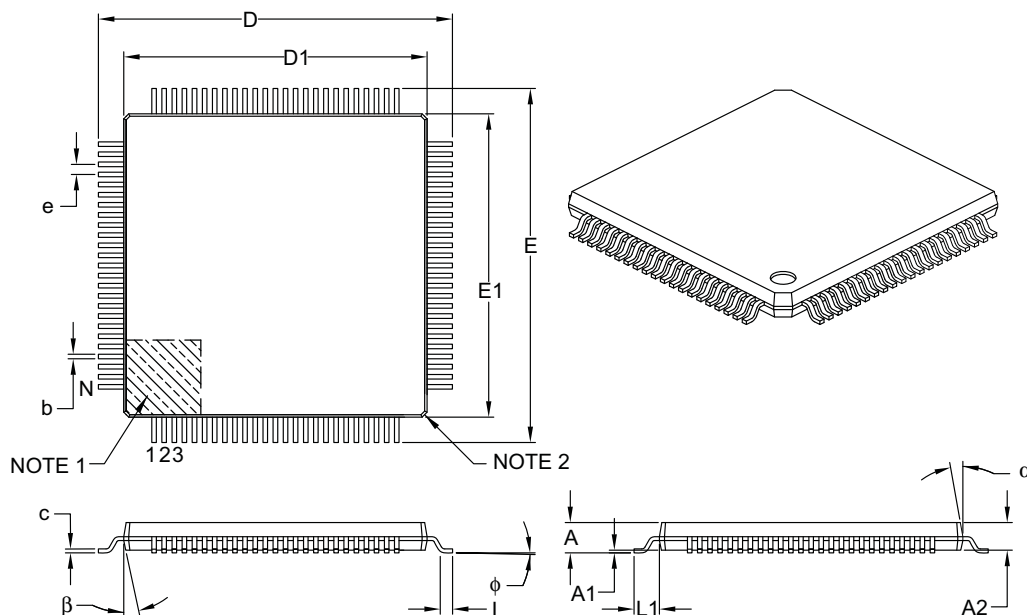

| Units                    |    | MILLIMETERS |      |      |
|--------------------------|----|-------------|------|------|
| Dimension Limits         |    | MIN         | NOM  | MAX  |
| Number of Leads          | N  | 100         |      |      |
| Lead Pitch               | e  | 0.40 BSC    |      |      |
| Overall Height           | A  | –           | –    | 1.20 |
| Molded Package Thickness | A2 | 0.95        | 1.00 | 1.05 |
| Standoff                 | A1 | 0.05        | –    | 0.15 |
| Foot Length              | L  | 0.45        | 0.60 | 0.75 |
| Footprint                | L1 | 1.00 REF    |      |      |
| Foot Angle               | φ  | 0°          | 3.5° | 7°   |
| Overall Width            | E  | 14.00 BSC   |      |      |
| Overall Length           | D  | 14.00 BSC   |      |      |
| Molded Package Width     | E1 | 12.00 BSC   |      |      |
| Molded Package Length    | D1 | 12.00 BSC   |      |      |
| Lead Thickness           | c  | 0.09        | –    | 0.20 |
| Lead Width               | b  | 0.13        | 0.18 | 0.23 |
| Mold Draft Angle Top     | α  | 11°         | 12°  | 13°  |
| Mold Draft Angle Bottom  | β  | 11°         | 12°  | 13°  |

### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Chamfers at corners are optional; size may vary.
- Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25 mm per side.
- Dimensioning and tolerancing per ASME Y14.5M.


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-100B

## 100-Lead Plastic Thin Quad Flatpack (PT) – 12x12x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

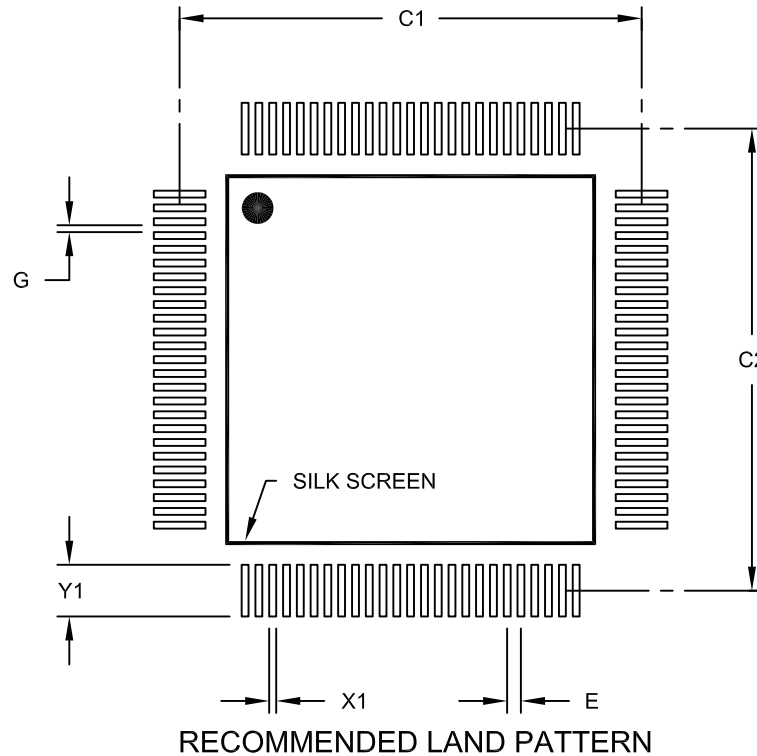

| Dimension Limits          | Units | MILLIMETERS |       |      |
|---------------------------|-------|-------------|-------|------|
|                           |       | MIN         | NOM   | MAX  |
| Contact Pitch             | E     | 0.40 BSC    |       |      |
| Contact Pad Spacing       | C1    |             | 13.40 |      |
| Contact Pad Spacing       | C2    |             | 13.40 |      |
| Contact Pad Width (X100)  | X1    |             |       | 0.20 |
| Contact Pad Length (X100) | Y1    |             |       | 1.50 |
| Distance Between Pads     | G     | 0.20        |       |      |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2100A

# PIC32MX5XX/6XX/7XX

### 121-Lead Plastic Thin Profile Ball Grid Array (BG) - 10x10x1.10 mm Body [XBGA]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

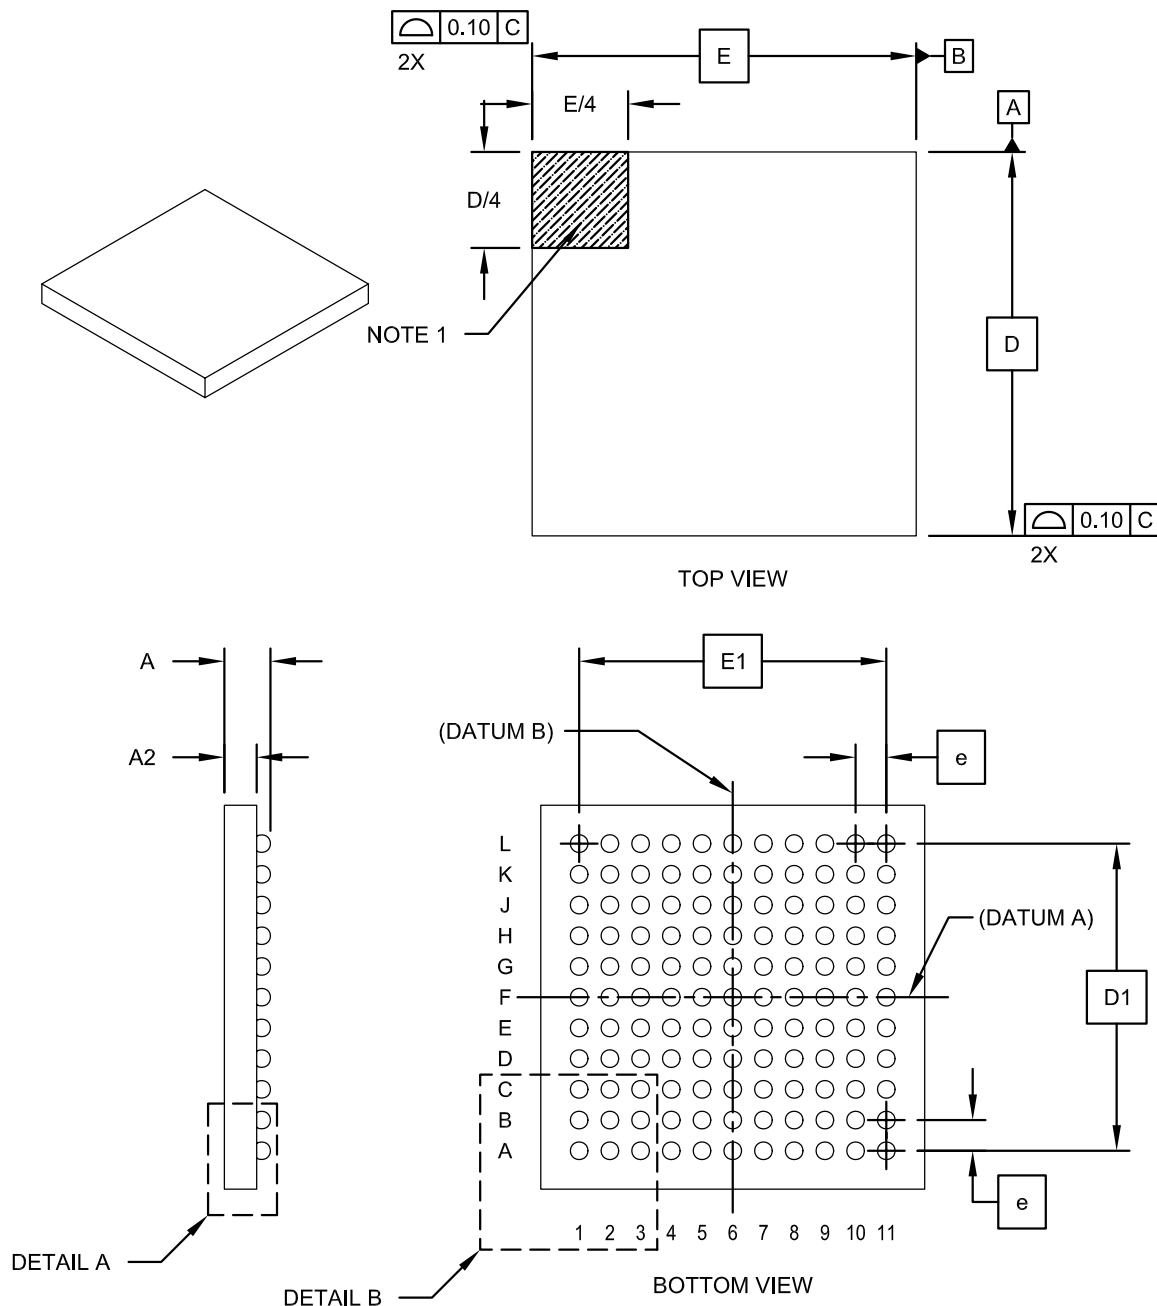

Microchip Technology Drawing C04-148A Sheet 1 of 2

## 121-Lead Plastic Thin Profile Ball Grid Array (BG) - 10x10x1.10 mm Body [XBGA]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

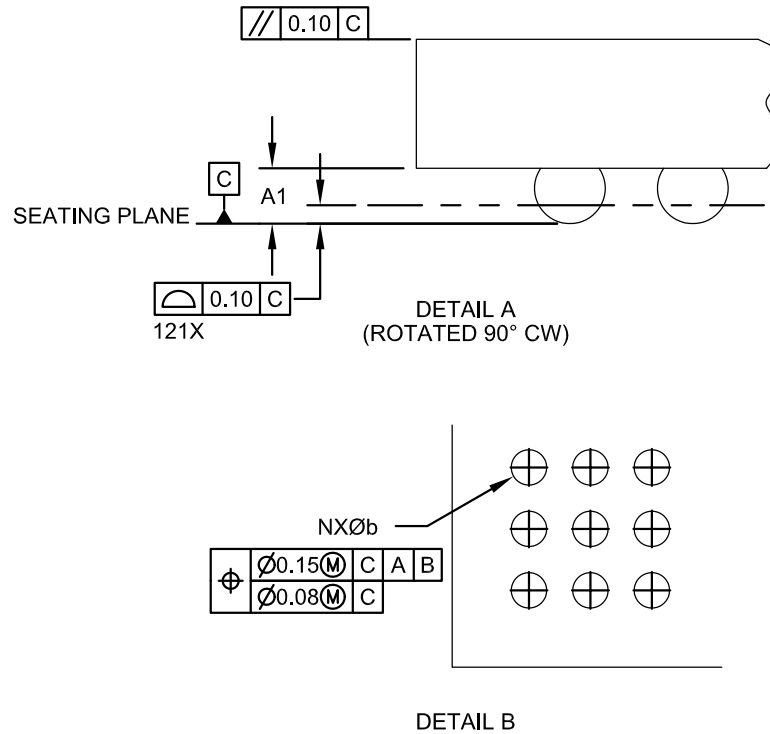

| Units                    |    | MILLIMETERS |      |      |
|--------------------------|----|-------------|------|------|
| Dimension Limits         |    | MIN         | NOM  | MAX  |
| Number of Contacts       | N  | 121         |      |      |
| Contact Pitch            | e  | 0.80 BSC    |      |      |
| Overall Height           | A  | 1.00        | 1.10 | 1.20 |
| Standoff                 | A1 | 0.25        | 0.30 | 0.35 |
| Molded Package Thickness | A2 | 0.55        | 0.60 | 0.65 |
| Overall Width            | E  | 10.00 BSC   |      |      |
| Array Width              | E1 | 8.00 BSC    |      |      |
| Overall Length           | D  | 10.00 BSC   |      |      |
| Array Length             | D1 | 8.00 BSC    |      |      |
| Contact Diameter         | b  | 0.40 TYP    |      |      |

### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M.  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.
- The outer rows and columns of balls are located with respect to datums A and B.

Microchip Technology Drawing C04-148 Rev A Sheet 2 of 2

# PIC32MX5XX/6XX/7XX

---

NOTES:

## APPENDIX A: MIGRATING FROM PIC32MX3XX/4XX TO PIC32MX5XX/6XX/7XX DEVICES

This appendix provides an overview of considerations for migrating from PIC32MX3XX/4XX devices to the PIC32MX5XX/6XX/7XX family of devices. The code developed for the PIC32MX3XX/4XX devices can be ported to the PIC32MX5XX/6XX/7XX devices after making the appropriate changes outlined below.

### A.1 DMA

PIC32MX5XX/6XX/7XX devices do not support stopping DMA transfers in Idle mode.

### A.2 Interrupts

PIC32MX5XX/6XX/7XX devices have persistent interrupts for some of the peripheral modules. This means that the interrupt condition for these peripherals must be cleared before the interrupt flag can be cleared.

For example, to clear a UART receive interrupt, the user application must first read the UART Receive register to clear the interrupt condition, and then clear the associated UxIF flag to clear the pending UART interrupt. In other words, the UxIF flag cannot be cleared by software until the UART Receive register is read.

Table 32-1 outlines the peripherals and associated interrupts that are implemented differently on PIC32MX5XX/6XX/7XX versus PIC32MX3XX/4XX devices.

In addition, on the SPI module, the IRQ numbers for the receive done interrupts were changed from 25 to 24 and the transfer done interrupts were changed from 24 to 25.

**TABLE A-1: PIC32MX3XX/4XX VS. PIC32MX5XX/6XX/7XX INTERRUPT IMPLEMENTATION DIFFERENCES**

| Module        | Interrupt Implementation                                                                                                                                                                                                                                                                                                                                                                                |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input Capture | To clear an interrupt source, read the Buffer Result (ICxBUF) register to obtain the number of capture results in the buffer that are below the interrupt threshold (specified by ICI<1:0> bits).                                                                                                                                                                                                       |
| SPI           | Receive and transmit interrupts are controlled by the SRXISEL<1:0> and STXISEL<1:0> bits, respectively. To clear an interrupt source, data must be written to, or read from, the SPIxBUF register to obtain the number of data to receive/transmit below the level specified by the SRXISEL<1:0> and STXISEL<1:0> bits.                                                                                 |
| UART          | TX interrupt will be generated as soon as the UART module is enabled. Receive and Transmit interrupts are controlled by the URXISEL<1:0> and UTXISEL<1:0> bits, respectively. To clear an interrupt source, data must be read from or written to the UxRXREG or UxTXREG registers to obtain the number of data to receive/transmit below the level specified by the URXISEL<1:0> and UTXISEL<1:0> bits. |
| ADC           | All samples must be read from the result registers (ADC1BUFx) to clear the interrupt source.                                                                                                                                                                                                                                                                                                            |
| PMP           | To clear an interrupt source, read the Parallel Master Port Data Input/Output (PMDIN/PMDOUT) register.                                                                                                                                                                                                                                                                                                  |

# PIC32MX5XX/6XX/7XX

## APPENDIX B: REVISION HISTORY

### Revision A (August 2009)

This is the initial revision of this document.

### Revision B (November 2009)

The revision includes the following global update:

- Added Note 2 to the shaded table that appears at the beginning of each chapter. This new note provides information regarding the availability of registers and their associated bits

Other major changes are referenced by their respective chapter/section in Table 32-2.

**TABLE B-1: MAJOR SECTION UPDATES**

| Section Name                                                                     | Update Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“High-Performance USB, CAN, and Ethernet 32-bit Flash Microcontrollers”</b>   | <p>Added the following devices:</p> <ul style="list-style-type: none"><li>- PIC32MX575F256L</li><li>- PIC32MX695F512L</li><li>- PIC32MX695F512H</li></ul> <p>The 100-pin TQFP pin diagrams have been updated to reflect the current pin name locations (see the <b>“Pin Diagrams”</b> section).</p> <p>Added the 121-pin Ball Grid Array (XBGA) pin diagram.</p> <p>Updated Table 1: “PIC32MX Features”</p> <p>Added the following tables:</p> <ul style="list-style-type: none"><li>- Table 2: “Pin Names: PIC32MX575F256L and PIC32MX575F512L Devices”,</li><li>- Table 3: “Pin Names: PIC32MX675F512L and PIC32MX695F512L Devices”</li><li>- Table 4: “Pin Names: PIC32MX795F512L Device”</li></ul> <p>Updated the following pins as 5V tolerant:</p> <ul style="list-style-type: none"><li>- 64-pin QFN: Pin 36 (D-/RG3) and Pin 37 (D+/RG2)</li><li>- 64-pin TQFP: Pin 36 (D-/RG3) and Pin 37 (D+/RG2)</li><li>- 100-pin TQFP: Pin 56 (D-/RG3) and Pin 57 (D+/RG2)</li></ul> |
| <b>Section 2.0 “Guidelines for Getting Started with 32-bit Microcontrollers”</b> | <p>Removed the last sentence of <b>Section 2.3.1 “Internal Regulator Mode”</b>.</p> <p>Removed Section 2.3.2 “External Regulator Mode”</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Section 4.0 “Memory Organization”</b>                                         | <p>Updated all register tables to include the Virtual Address and All Resets columns.</p> <p>Updated the title of Figure 4-1 to include the PIC32MX575F256L device.</p> <p>Updated the title of Figure 4-3 to include the PIC32MX695F512L and PIC32MX695F512H devices. Also changed PIC32MX795F512L to PIC32MX795F512H.</p> <p>Updated the title of Table 4-3 to include the PIC32MX695F512H device.</p> <p>Updated the title of Table 4-5 to include the PIC32MX575F256L device.</p> <p>Updated the title of Table 4-6 to include the PIC32MX695F512L device.</p> <p>Reversed the order of Table 4-11 and Table 4-12.</p> <p>Reversed the order of Table 4-14 and Table 4-15.</p> <p>Updated the title of Table 4-15 to include the PIC32MX575F256L and PIC32MX695F512L devices.</p> <p>Updated the title of Table 4-45 to include the PIC32MX575F256L device.</p> <p>Updated the title of Table 4-47 to include the PIC32MX695F512H and PIC32MX695F512L devices.</p>            |

**TABLE B-1: MAJOR SECTION UPDATES (CONTINUED)**

| Section Name                                                   | Update Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Section 12.0 “I/O Ports”</b>                                | Updated the second paragraph of <b>Section 12.1.2 “Digital Inputs”</b> and removed Table 12-1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Section 22.0 “10-bit Analog-to-Digital Converter (ADC)”</b> | Updated the ADC Conversion Clock Period Block Diagram (see Figure 22-2).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Section 28.0 “Special Features”</b>                         | <p>Removed references to the ENVREG pin in <b>Section 28.3 “On-Chip Voltage Regulator”</b>.</p> <p>Updated the first sentence of <b>Section 28.3.1 “On-Chip Regulator and POR”</b> and <b>Section 28.3.2 “On-Chip Regulator and BOR”</b>.</p> <p>Updated the Connections for the On-Chip Regulator (see Figure 28-2).</p>                                                                                                                                                                                                                                                                                                                                            |
| <b>Section 31.0 “Electrical Characteristics”</b>               | <p>Updated the Absolute Maximum Ratings and added Note 3.</p> <p>Added Thermal Packaging Characteristics for the 121-pin XBGA package (see Table 31-3).</p> <p>Updated the Operating Current (IDD) DC Characteristics (see Table 31-5).</p> <p>Updated the Idle Current (Iidle) DC Characteristics (see Table 31-6).</p> <p>Updated the Power-Down Current (IPD) DC Characteristics (see Table 31-7).</p> <p>Removed Note 1 from the Program Flash Memory Wait State Characteristics (see Table 31-11).</p> <p>Updated the SPIx Module Slave Mode (CKE = 1) Timing Characteristics, changing SP52 to SP35 between the MSb and Bit 14 on SDOx (see Figure 31-13).</p> |
| <b>Section 32.0 “Packaging Information”</b>                    | Added the 121-pin XBGA package marking information and package details.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>“Product Identification System”</b>                         | <p>Added the definition for BG (121-lead 10x10x1.1 mm, XBGA).</p> <p>Added the definition for Speed.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

# PIC32MX5XX/6XX/7XX

---

NOTES:

## INDEX

### A

|                                              |     |
|----------------------------------------------|-----|
| AC Characteristics .....                     | 186 |
| Internal RC Accuracy .....                   | 188 |
| AC Electrical Specifications                 |     |
| Parallel Master Port Read Requirements ..... | 215 |
| Parallel Master Port Write Requirements..... | 216 |
| Parallel Slave Port Requirements .....       | 214 |
| Assembler                                    |     |
| MPASM Assembler .....                        | 174 |

### B

|                                                |              |
|------------------------------------------------|--------------|
| Block Diagrams                                 |              |
| A/D Module .....                               | 141          |
| Comparator I/O Operating Modes.....            | 147          |
| Comparator Voltage Reference .....             | 149          |
| Connections for On-Chip Voltage Regulator..... | 163          |
| Input Capture .....                            | 127          |
| JTAG Compliant Application Showing             |              |
| Daisy-Chaining of Components .....             | 164          |
| Output Compare Module.....                     | 129          |
| Reset System.....                              | 107          |
| RTCC .....                                     | 139          |
| Type B Timer .....                             | 39, 115, 125 |
| UART .....                                     | 135          |
| WDT.....                                       | 162          |
| Brown-out Reset (BOR)                          |              |
| and On-Chip Voltage Regulator .....            | 163          |

### C

|                              |               |
|------------------------------|---------------|
| C Compilers                  |               |
| MPLAB C18 .....              | 174           |
| Comparator                   |               |
| Operation .....              | 144, 146, 148 |
| Comparator Voltage Reference |               |
| Configuring.....             | 150           |
| CPU Module.....              | 35, 39        |

### D

|                                              |     |
|----------------------------------------------|-----|
| DC Characteristics .....                     | 178 |
| I/O Pin Input Specifications.....            | 182 |
| I/O Pin Output Specifications .....          | 183 |
| Idle Current (I <sub>IDLE</sub> ) .....      | 180 |
| Operating Current (I <sub>DD</sub> ).....    | 179 |
| Power-Down Current (I <sub>PD</sub> ) .....  | 181 |
| Program Memory .....                         | 183 |
| Temperature and Voltage Specifications ..... | 178 |
| Development Support .....                    | 173 |

### E

|                                 |     |
|---------------------------------|-----|
| Electrical Characteristics..... | 177 |
| AC.....                         | 186 |
| Errata .....                    | 21  |

### F

|                            |     |
|----------------------------|-----|
| Flash Program Memory ..... | 105 |
| RTSP Operation.....        | 105 |

### I

|                         |          |
|-------------------------|----------|
| I/O Ports .....         | 121, 135 |
| Parallel I/O (PIO)..... | 122      |

### M

|                                                      |     |
|------------------------------------------------------|-----|
| MPLAB ASM30 Assembler, Linker, Librarian .....       | 174 |
| MPLAB Integrated Development Environment Software .. | 173 |

|                                                   |     |
|---------------------------------------------------|-----|
| MPLAB PM3 Device Programmer .....                 | 176 |
| MPLAB REAL ICE In-Circuit Emulator System .....   | 175 |
| MPLINK Object Linker/MPLIB Object Librarian ..... | 174 |

### N

|                          |     |
|--------------------------|-----|
| Non-Maskable Traps ..... | 110 |
|--------------------------|-----|

### O

|                               |     |
|-------------------------------|-----|
| Open-Drain Configuration..... | 122 |
|-------------------------------|-----|

### P

|                                           |     |
|-------------------------------------------|-----|
| Packaging .....                           | 219 |
| Details.....                              | 221 |
| PIC32MX Family USB Interface Diagram..... | 120 |
| Pinout I/O Descriptions (table).....      | 24  |
| Power-on Reset (POR)                      |     |
| and On-Chip Voltage Regulator .....       | 163 |

### S

|                                        |                         |
|----------------------------------------|-------------------------|
| Serial Peripheral Interface (SPI)..... | 107, 117, 131, 137, 139 |
| Software Simulator (MPLAB SIM) .....   | 175                     |
| Special Features.....                  | 153                     |

### T

|                                                     |                    |
|-----------------------------------------------------|--------------------|
| Timer1 Module.....                                  | 109, 115, 123, 125 |
| Timing Diagrams                                     |                    |
| 10-bit A/D Conversion (CHPS = 01, SIMSAM = 0,       |                    |
| ASAM = 0, SSRC = 000) .....                         | 212                |
| ECAN I/O .....                                      | 206                |
| I2Cx Bus Data (Master Mode) .....                   | 200                |
| I2Cx Bus Data (Slave Mode) .....                    | 203                |
| I2Cx Bus Start/Stop Bits (Master Mode).....         | 200                |
| I2Cx Bus Start/Stop Bits (Slave Mode).....          | 203                |
| Input Capture (CAPx) .....                          | 193                |
| OC/PWM .....                                        | 194                |
| Output Compare (OCx) .....                          | 194                |
| Parallel Master Port Write.....                     | 215, 216           |
| Parallel Slave Port .....                           | 214                |
| SPIx Master Mode (CKE = 0) .....                    | 195                |
| SPIx Master Mode (CKE = 1) .....                    | 196                |
| SPIx Slave Mode (CKE = 0) .....                     | 197                |
| SPIx Slave Mode (CKE = 1) .....                     | 198                |
| Timer1, 2, 3, 4, 5, 6, 7, 8, 9 External Clock ..... | 192                |
| Transmission (8-bit or 9-bit Data) .....            | 136                |
| Timing Requirements                                 |                    |
| CLKO and I/O .....                                  | 189                |
| Timing Specifications                               |                    |
| CAN I/O Requirements.....                           | 206                |
| I2Cx Bus Data Requirements (Master Mode).....       | 201                |
| I2Cx Bus Data Requirements (Slave Mode).....        | 204                |
| Output Compare Requirements.....                    | 194                |
| Simple OC/PWM Mode Requirements .....               | 194                |
| SPIx Master Mode (CKE = 0) Requirements.....        | 195                |
| SPIx Master Mode (CKE = 1) Requirements.....        | 196                |
| SPIx Slave Mode (CKE = 1) Requirements.....         | 198                |

### U

|                     |     |
|---------------------|-----|
| UART Reception..... | 136 |
|---------------------|-----|

### V

|                                       |     |
|---------------------------------------|-----|
| VCAP/VDDCORE pin.....                 | 163 |
| Voltage Reference Specifications..... | 185 |
| Voltage Regulator (On-Chip) .....     | 163 |

# PIC32MX5XX/6XX/7XX

---

**W**

Watchdog Timer

|                           |     |
|---------------------------|-----|
| Operation .....           | 162 |
| WWW, On-Line Support..... | 21  |

# PIC32MX5XX/6XX/7XX

## Product Identification System

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

|                                    | PIC32 | MX    | 5XX   | F     | 512   | H     | T     | - 80  | I /   | PT    | - XXX |
|------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Microchip Brand                    | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Architecture                       | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Product Groups                     | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Flash Memory Family                | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Program Memory Size (KB)           | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Pin Count                          | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Tape and Reel Flag (if applicable) | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Speed                              | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Temperature Range                  | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Package                            | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| Pattern                            | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |

**Example:**  
PIC32MX575F256H-80I/PT:  
General purpose PIC32MX,  
256 KB program memory,  
64-pin, Industrial temperature,  
TQFP package.

| Flash Memory Family |                                                                                                                                                                                                                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Architecture        | MX = 32-bit RISC MCU core                                                                                                                                                                                                                                                                            |
| Product Groups      | 5XX = General purpose microcontroller family<br>6XX = General purpose microcontroller family<br>7XX = General purpose microcontroller family                                                                                                                                                         |
| Flash Memory Family | F = Flash program memory                                                                                                                                                                                                                                                                             |
| Program Memory Size | 256 = 256K<br>512 = 512K                                                                                                                                                                                                                                                                             |
| Pin Count           | H = 64-pin<br>L = 100-pin                                                                                                                                                                                                                                                                            |
| Speed               | 80 = 80 MHz                                                                                                                                                                                                                                                                                          |
| Temperature Range   | I = -40°C to +85°C (Industrial)                                                                                                                                                                                                                                                                      |
| Package             | PT = 64-Lead (10x10x1 mm) TQFP (Thin Quad Flatpack)<br>PT = 100-Lead (12x12x1 mm) TQFP (Thin Quad Flatpack)<br>PF = 100-Lead (14x14x1 mm) TQFP (Thin Quad Flatpack)<br>MR = 64-Lead (9x9x0.9 mm) QFN (Plastic Quad Flat)<br>BG = 121-Lead (10x10x1.1 mm) XBGA (Plastic Thin Profile Ball Grid Array) |
| Pattern             | Three-digit QTP, SQTP, Code or Special Requirements (blank otherwise)<br>ES = Engineering Sample                                                                                                                                                                                                     |



## WORLDWIDE SALES AND SERVICE

### AMERICAS

#### Corporate Office

2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://support.microchip.com>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

#### Atlanta

Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

#### Boston

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

#### Chicago

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

#### Cleveland

Independence, OH  
Tel: 216-447-0464  
Fax: 216-447-0643

#### Dallas

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

#### Detroit

Farmington Hills, MI  
Tel: 248-538-2250  
Fax: 248-538-2260

#### Kokomo

Kokomo, IN  
Tel: 765-864-8360  
Fax: 765-864-8387

#### Los Angeles

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

#### Santa Clara

Santa Clara, CA  
Tel: 408-961-6444  
Fax: 408-961-6445

#### Toronto

Mississauga, Ontario,  
Canada  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

#### Asia Pacific Office

Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon  
Hong Kong  
Tel: 852-2401-1200  
Fax: 852-2401-3431

#### Australia - Sydney

Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

#### China - Beijing

Tel: 86-10-8528-2100  
Fax: 86-10-8528-2104

#### China - Chengdu

Tel: 86-28-8665-5511  
Fax: 86-28-8665-7889

#### China - Hong Kong SAR

Tel: 852-2401-1200  
Fax: 852-2401-3431

#### China - Nanjing

Tel: 86-25-8473-2460  
Fax: 86-25-8473-2470

#### China - Qingdao

Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

#### China - Shanghai

Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

#### China - Shenyang

Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

#### China - Shenzhen

Tel: 86-755-8203-2660  
Fax: 86-755-8203-1760

#### China - Wuhan

Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

#### China - Xiamen

Tel: 86-592-2388138  
Fax: 86-592-2388130

#### China - Xian

Tel: 86-29-8833-7252  
Fax: 86-29-8833-7256

#### China - Zhuhai

Tel: 86-756-3210040  
Fax: 86-756-3210049

### ASIA/PACIFIC

#### India - Bangalore

Tel: 91-80-3090-4444  
Fax: 91-80-3090-4080

#### India - New Delhi

Tel: 91-11-4160-8631  
Fax: 91-11-4160-8632

#### India - Pune

Tel: 91-20-2566-1512  
Fax: 91-20-2566-1513

#### Japan - Yokohama

Tel: 81-45-471- 6166  
Fax: 81-45-471-6122

#### Korea - Daegu

Tel: 82-53-744-4301  
Fax: 82-53-744-4302

#### Korea - Seoul

Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

#### Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857  
Fax: 60-3-6201-9859

#### Malaysia - Penang

Tel: 60-4-227-8870  
Fax: 60-4-227-4068

#### Philippines - Manila

Tel: 63-2-634-9065  
Fax: 63-2-634-9069

#### Singapore

Tel: 65-6334-8870  
Fax: 65-6334-8850

#### Taiwan - Hsin Chu

Tel: 886-3-6578-300  
Fax: 886-3-6578-370

#### Taiwan - Kaohsiung

Tel: 886-7-536-4818  
Fax: 886-7-536-4803

#### Taiwan - Taipei

Tel: 886-2-2500-6610  
Fax: 886-2-2508-0102

#### Thailand - Bangkok

Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

#### Austria - Wels

Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

#### Denmark - Copenhagen

Tel: 45-4450-2828  
Fax: 45-4485-2829

#### France - Paris

Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

#### Germany - Munich

Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

#### Italy - Milan

Tel: 39-0331-742611  
Fax: 39-0331-466781

#### Netherlands - Drunen

Tel: 31-416-690399  
Fax: 31-416-690340

#### Spain - Madrid

Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

#### UK - Wokingham

Tel: 44-118-921-5869  
Fax: 44-118-921-5820

03/26/09